

Electromagnetic Scattering by a Cylinder in a Lossy Medium of an Inhomogeneous Elliptically Polarized Plane Wave

Fabio Mangini^{1,2}, Lorenzo Dinia², and Fabrizio Frezza²

¹Department of Information Engineering (DII), University of Brescia, Brescia, Italy
²Department of Information Engineering, Electronics and Telecommunications (DIET),
“La Sapienza” University of Rome, Rome, Italy

<https://doi.org/10.26636/jtit.2019.135819>

Abstract—In this paper, a rigorous theoretical approach, adopted in order to generalize the Vectorial Cylindrical-Harmonics (VCH) expansion of an inhomogeneous elliptically polarized plane wave, is presented. An application of the VCH expansion to analyze electromagnetic field scattered by an infinite circular cylinder is presented. The results are obtained using the so-called complex-angle formalism reaching a superposition of Vectorial Cylindrical-Harmonics. To validate the method, a Matlab code was implemented. Also, the validity of the methodology was confirmed through some comparisons between the proposed method and the numerical results obtained based on the Finite Element Method (FEM) in the canonical scenario with a single cylinder.

Keywords—electromagnetic scattering, inhomogeneous wave dispersion, vectorial cylindrical-harmonics.

1. Introduction

The problem of solving Maxwell’s equations in order to determine the field scattered by an object has been the focus of many researchers for several decades now. All aspects of electromagnetic scattering, approached from a purely geometrical point of view, have already been analyzed. In literature, several works can be found on canonical scattering caused by spherical, spheroidal, conical, cylindrical and ellipsoidal objects [1]–[6]. More complex scenarios have also been considered, such as buried spheres, cylinders and axially symmetric objects [7]–[13]. Ensembles of scattering objects can be found in literature as well [14]–[18]. Furthermore, different types of materials that the scatterer is made of have been studied too [19]–[23].

This article introduces a rigorous method relied upon to represent an elliptically inhomogeneous plane wave polarized as an expansion of Vectorial Cylindrical-Harmonics (VCH). This subject is very interesting because of the general representation of an electromagnetic wave as an inhomogeneous wave. In fact, when an electromagnetic wave propagates in a lossy medium, the wave vector represent-

ing it is of a complex nature, as it comprises two components – a phase vector and an attenuation vector. In nature, a wave rarely propagates in a completely lossless medium, especially in the field of biology, where water is the main constituent.

Ivlev was the first author to present a work on an inhomogeneous elliptically polarized plane wave [22], [23], determining the basic structure of propagation and exploring its energy fallout. Subsequently, he proposed the first application of an infinite cylinder. In particular, in these studies, the Adler-Chu-Fano formulation (the phase and attenuation vectors) [24] was used, achieving a result equally elegant as complex. In the current study, the use of the complex-angle [25] formulation showed that the representation of the incident field as a superposition of VCH could be obtained with much less complexity. Moreover, this approach will be generalized and related to scattering caused by a cylinder immersed in a lossy medium.

The paper will also provide numerical comparisons for various developments in cylindrical vector waves. Furthermore, results pertaining to an infinite perfect electric conductor (PEC) cylinder immersed in a lossy medium will be provided. Matlab was used for the implementation of the various formulations, while the relevant model was simulated with COMSOL Multiphysics, a commercial software based on the finite element method (FEM).

The article is structured in the following manner. In Section 2, the formalisms are introduced with the purpose of representing an inhomogeneous wave and of providing the formulas used to proceed from a formalism to another. Subsequently, theoretical aspects are illustrated in order to attain a representation of an inhomogeneous elliptically polarized electric field as a superposition of VCHs. In Section 3, some numerical validations are shown, comparing the numerical results of the formulations implemented in Matlab with the ones obtained with the use of COMSOL Multiphysics. Furthermore, new results for the scattering of an elliptically polarized plane wave at oblique incidence from

a PEC cylinder in a lossy medium are presented. Finally, the conclusions are drawn in Section 6.

2. Theoretical Approach

In literature, it is known that an inhomogeneous wave propagating in a lossy medium can be represented through two formalisms. The best one, known as the Adler-Chu-Fano formulation, has a complex propagation vector $k_i = \beta_i + i\alpha_i$ represented by the phase and attenuation vectors, $\beta_i, \alpha_i \in \mathfrak{R}$, respectively. The second one, known as the complex-angle formulation $k_i = k_{\mathbf{R}} + ik_{\mathbf{I}}$ has the propagation vector represented by a superposition of real and imaginary parts which form a complex angle with an axis of the Cartesian reference system $\bar{\vartheta}_i = \vartheta_{\mathbf{R}} + i\vartheta_{\mathbf{I}}$ [25], see Fig. 1. We have used the $\bar{\vartheta}$ symbol to highlight the complex nature of the angle.

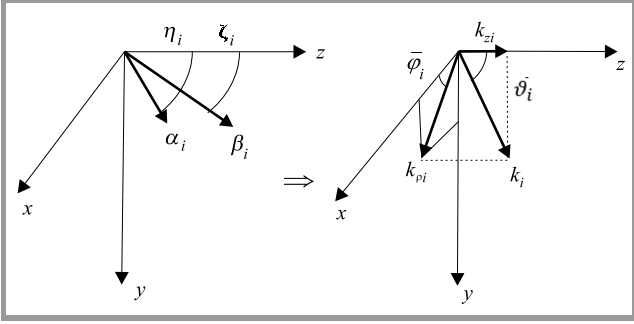


Fig. 1. In the left-hand side figure, the complex wave vector of an inhomogeneous plane wave is presented with the use of phase and attenuation vectors. In the right-hand side picture, the same vector is represented with the use of the complex-angle formalism.

This article demonstrates how to use the complex-angle formalism in order to obtain a simple representation of the field expressed as a superposition of elementary cylindrical waves. Let us consider the following wave, in which the vectors α_i and β_i are forming the angles ζ_i and η_i with axis z , are positioned on the same plane passing through the z -axis and are forming a real angle φ with axis x (see Fig. 1). In this case, the relations between the two formalisms are [25]:

$$\cos \vartheta_{\mathbf{R}} = \frac{k_{\mathbf{R}}\beta \cos \xi + k_{\mathbf{I}}\alpha \cos \eta}{\sqrt{k_{\mathbf{R}}^2\beta^2 - k_{\mathbf{I}}^2\alpha^2 + 2(k_{\mathbf{R}}k_{\mathbf{I}})^2}}, \quad (1)$$

$$\sin \vartheta_{\mathbf{R}} = \frac{k_{\mathbf{R}}\beta \sin \xi + k_{\mathbf{I}}\alpha \sin \eta}{\sqrt{k_{\mathbf{R}}^2\beta^2 - k_{\mathbf{I}}^2\alpha^2 + 2(k_{\mathbf{R}}k_{\mathbf{I}})^2}}, \quad (2)$$

$$\vartheta_{\mathbf{I}} = \frac{1}{2} \operatorname{atanh} \left(\frac{2\beta\alpha}{k^2} \right), \quad (3)$$

where η and ξ are the angles that the vectors α and β form, respectively, with axis z . Both Eqs. (1) and (2) are needed in order to avoid the indetermination of the value assumed by $\vartheta_{\mathbf{R}}$. For the sake of simplicity, we have worked

on the plane $\varphi = 0$. However, the following considerations can easily be extended to each plane with $\varphi \neq 0$.

It is known that by resolving the scalar Helmholtz equation, the following scalar solution is obtained [26]–[32]:

$$\psi_m = A e^{im\varphi} Z_m(k_{\rho}\rho) e^{ik_z z - i\omega t}, \quad (4)$$

having indicated with ρ, φ, z the three variables independent of the cylindrical coordinate system, with A – a complex constant, and with k_{ρ} and k_z the transverse and longitudinal components of the wave vector, respectively, that are defined as:

$$k_{\rho}^2 + k_z^2 = k^2, \quad (5)$$

with $k_x = k_{\rho} \cos \varphi$ and $k_y = k_{\rho} \sin \varphi$ which are the projections of transversal vector k_{ρ} on plane $z = 0$. The function $Z_m(k_{\rho}\rho)$ represents $J_m(k_{\rho}\rho)$, $Y_m(k_{\rho}\rho)$, $H_m^{(1)}(k_{\rho}\rho)$ and $H_m^{(2)}(k_{\rho}\rho)$, the first, second, third, and fourth Bessel functions, respectively.

At this point, the harmonic vector is defined as follows [27], [30], [32]:

$$\mathbf{M} = \nabla \times (\hat{\mathbf{z}}_0 \psi), \quad \mathbf{N} = \frac{1}{k} \nabla \times \mathbf{M}, \quad (6)$$

it is always possible to define the electric and the magnetic fields as superpositions of these vectorial functions:

$$\mathbf{E} = \sum_{m=-\infty}^{+\infty} (a_m \mathbf{M}_m + b_m \mathbf{N}_m), \quad (7)$$

$$\mathbf{H} = \frac{k}{i\omega\mu} \sum_{m=-\infty}^{+\infty} (a_m \mathbf{N}_m + b_m \mathbf{M}_m). \quad (8)$$

Let us consider a simple inhomogeneous plane wave, using the Fourier series formulas and mathematical identities of the exponential functions [27], [30], [33], [34]. The following is obtained:

$$e^{i(k_x x + k_y y)} = e^{ik_{\rho}\rho \cos(\varphi - \varphi_i)} \quad (9)$$

$$= \sum_{m=-\infty}^{+\infty} J_m(k_{\rho}\rho) e^{im(\varphi - \varphi_i)} e^{im\frac{\pi}{2}}. \quad (10)$$

Now, multiplying both members of Eq. (9) by $e^{ik_z z}$ and considering Eq. (4), the following is reached:

$$e^{i\mathbf{k}\cdot\mathbf{r}} = \sum_{m=-\infty}^{+\infty} \psi_m e^{-im\varphi_i} e^{im\frac{\pi}{2}}. \quad (11)$$

Multiplying both members of Eq. (11) by $\nabla \times \mathbf{z}_0$, and considering Eq. (6), the following result is achieved:

$$\nabla \times \mathbf{z}_0 e^{i\mathbf{k}\cdot\mathbf{r}} = \sum_{m=-\infty}^{+\infty} \mathbf{M}_m(k_{\mathbf{R}}) e^{-im\varphi_i} e^{im\frac{\pi}{2}}, \quad (12)$$

where the first member, using the following identities $\nabla \times \mathbf{z}_0 e^{i\mathbf{k}\cdot\mathbf{r}} = i\mathbf{k} \times \mathbf{z}_0 e^{i\mathbf{k}\cdot\mathbf{r}} = -ik_{\rho} \mathbf{h}_0(\bar{\vartheta}_i, \varphi_i) e^{i\mathbf{k}\cdot\mathbf{r}}$ can be written as follows:

$$\mathbf{h}_0(\bar{\vartheta}_i, \varphi_i) e^{i\mathbf{k}\cdot\mathbf{r}} = \frac{i}{k_{\rho}} \sum_{m=-\infty}^{+\infty} i^m \mathbf{M}_m(k_{\mathbf{R}}) e^{-im\varphi_i}, \quad (13)$$

with \mathbf{h}_0 the unit vector contained in (x, y) plane. Now, considering the further mathematical identities $\nabla \times \mathbf{h}_0(\bar{\vartheta}_i, \varphi_i) e^{i\mathbf{k}\cdot\mathbf{r}} = i\mathbf{k} \times \mathbf{h}_0(\bar{\vartheta}_i, \varphi_i) e^{i\mathbf{k}\cdot\mathbf{r}} = ik\mathbf{v}_0(\bar{\vartheta}_i, \varphi_i) e^{i\mathbf{k}\cdot\mathbf{r}}$, and taking into account the curl of both members, we obtain:

$$\mathbf{v}_0(\bar{\vartheta}_i, \varphi_i) e^{i\mathbf{k}\cdot\mathbf{r}} = \frac{1}{k\rho} \sum_{m=-\infty}^{+\infty} i^m \mathbf{N}_m(k\mathbf{r}) e^{-im\varphi_i}, \quad (14)$$

having indicated with \mathbf{v}_0 the vertical unit vector with respect to the plane (x, y) . For an exhaustive exposition, the formulations for the vertical and horizontal components on a Cartesian reference system are reported:

$$\mathbf{v}_{i0} = \cos \bar{\vartheta}_i \cos \varphi_i \mathbf{x}_0 + \cos \bar{\vartheta}_i \sin \varphi_i \mathbf{y}_0 - \sin \bar{\vartheta}_i \mathbf{z}_0, \quad (15)$$

$$\mathbf{h}_{i0} = -\sin \varphi_i \mathbf{x}_0 + \cos \varphi_i \mathbf{y}_0. \quad (16)$$

Ultimately, we can affirm that any obliquely polarized elliptical field, with respect to the surface of a cylinder, can be represented as a linear combination of two components, one vertical and one horizontal, each multiplied by its polarization coefficient (E_{vi} and E_{hi} , respectively):

$$\begin{aligned} \mathbf{E}(\mathbf{r}) &= [E_{vi} \mathbf{v}_0(\bar{\vartheta}_i, \varphi_i) + E_{hi} \mathbf{h}_0(\bar{\vartheta}_i, \varphi_i)] e^{i\mathbf{k}\cdot\mathbf{r}} \\ &= \frac{1}{k\rho} \sum_{m=-\infty}^{+\infty} i^m [iE_{hi} \mathbf{M}_m(k\mathbf{r}) - E_{vi} \mathbf{N}_m(k\mathbf{r})] e^{-im\varphi_i} \end{aligned} \quad (17)$$

Imposing the following definitions [32]:

$$a_m = \frac{E_{hi}}{k\rho} i^{m+1} e^{-im\varphi_i}, \quad (18)$$

$$b_m = -\frac{E_{vi}}{k\rho} i^m e^{-im\varphi_i}, \quad (19)$$

$$\mathbf{k}_i = k (\sin \bar{\vartheta}_i \cos \varphi_i \mathbf{x}_0 + \sin \bar{\vartheta}_i \sin \varphi_i \mathbf{y}_0 + \cos \bar{\vartheta}_i \mathbf{z}_0), \quad (20)$$

$$\mathbf{M}_m = \mathbf{m}_m e^{im\varphi} e^{ik_z z - i\omega t}, \quad (21)$$

$$\mathbf{N}_m = \mathbf{n}_m e^{im\varphi} e^{ik_z z - i\omega t}, \quad (22)$$

with

$$\mathbf{m}_m = im \frac{Z_m(k\rho\rho)}{\rho} \rho_0 - k\rho \frac{\partial Z_m(k\rho\rho)}{\partial \rho} \varphi_0, \quad (23)$$

$$\begin{aligned} \mathbf{n}_m &= i \frac{k_z k\rho}{k} \frac{\partial Z_m(k\rho\rho)}{\partial \rho} \rho_0 - \frac{mk_z}{k} \frac{Z_m(k\rho\rho)}{\rho} \varphi_0 \\ &\quad + \frac{k_\rho^2}{k} Z_m(k\rho\rho) \mathbf{z}_0, \end{aligned} \quad (24)$$

the electric field can be written in the following elegant way:

$$\mathbf{E}_i(k\mathbf{r}) = \sum_{m=-\infty}^{+\infty} [a_m \mathbf{M}_m(k\mathbf{r}) + b_m \mathbf{N}_m(k\mathbf{r})]. \quad (25)$$

We can extend what has been done so far to a more generic case, where the phase vector, attenuation vector, and the z axis are not positioned on the same plane. In this case, angle $\bar{\varphi}_i$ is complex as well. Following the same logical

reasoning as adopted in the previous case and exploiting the mathematical identities [33], the following is obtained:

$$\mathbf{E}_i(k\mathbf{r}) = \sum_{m=-\infty}^{+\infty} [\bar{a}_m \mathbf{M}_m(k^* \mathbf{r}) + \bar{b}_m \mathbf{N}_m(k^* \mathbf{r})], \quad (26)$$

with

$$\bar{a}_m = \frac{E_{hi}}{k\rho} (-i)^{m-1} e^{-im\bar{\varphi}_i}, \quad (27)$$

$$\bar{b}_m = -\frac{E_{vi}}{k\rho} (-i)^m e^{-im\bar{\varphi}_i}, \quad (28)$$

$$\mathbf{k}_i = k^* (\sin \bar{\vartheta}_i \cos \bar{\varphi}_i \mathbf{x}_0 + \sin \bar{\vartheta}_i \sin \bar{\varphi}_i \mathbf{y}_0 + \cos \bar{\vartheta}_i \mathbf{z}_0), \quad (29)$$

and with k^* the complex conjugate of the wave number k .

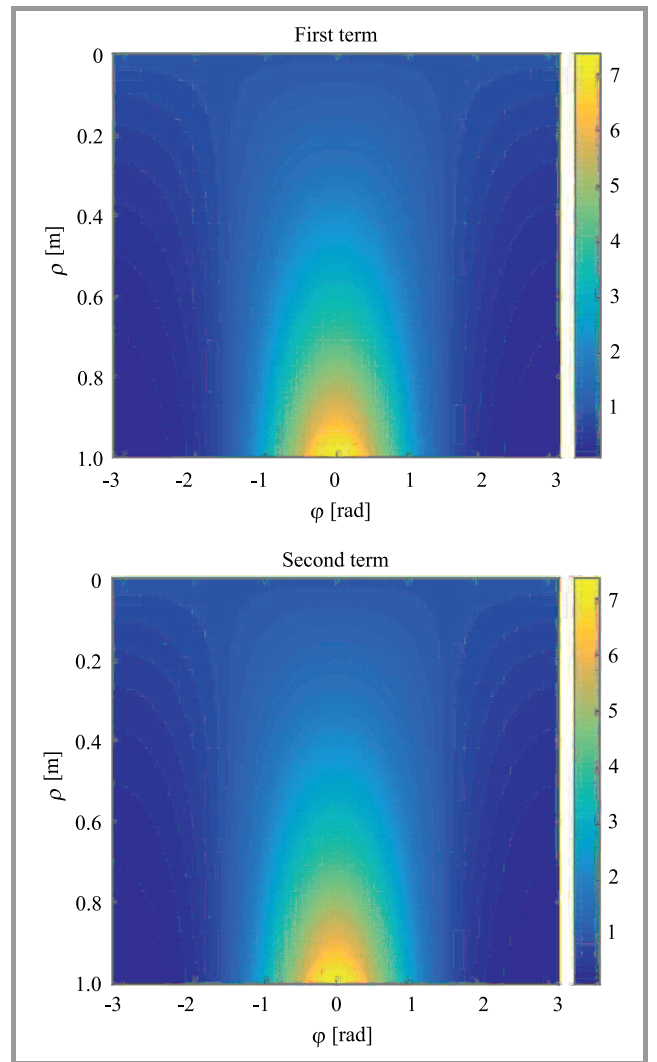


Fig. 2. Comparison of the absolute value of the inhomogeneous electric field as a function of φ and ρ in the case of $\varphi \in R$, see Eq. (25). The upper figure shows the results implementing the inhomogeneous plane wave – see the first member of Eq. (25); in the lower figure, results implementing the superposition of the VCHs are shown – see the second member of Eq. (25). (For color pictures visit www.nit.eu/publications/journal-jtit)

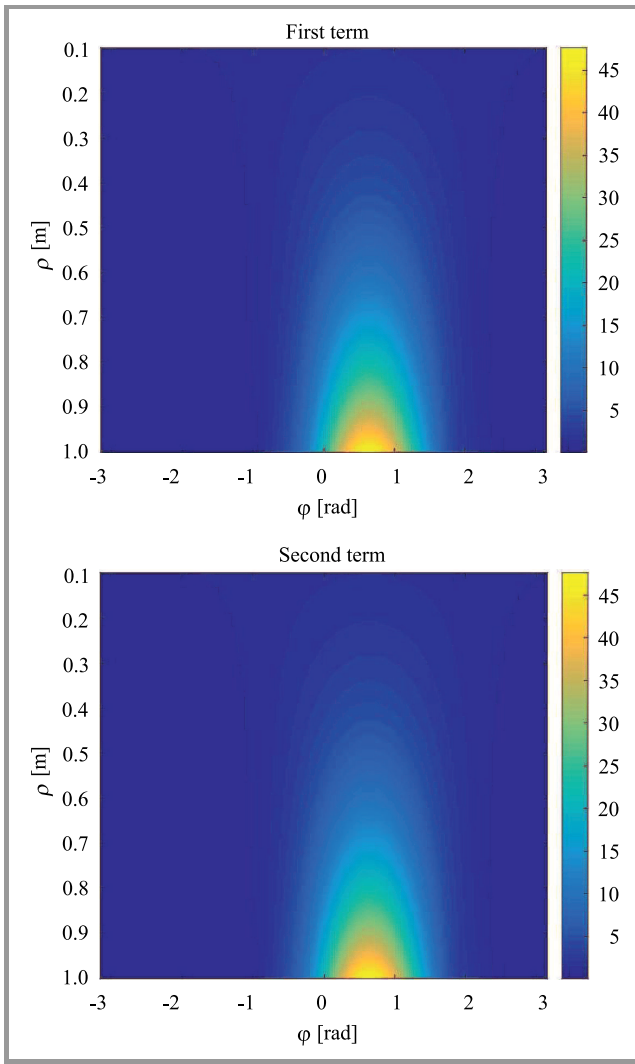


Fig. 3. Comparison of the absolute value of the inhomogeneous electric field as a function of φ and ρ in the case of $\varphi \in I$ – see Eq. (26). The upper figure shows the results implementing the inhomogeneous plane wave – see the first member of Eq. (26), while the lower figure shows the results implementing the superposition of VCHs – see the second member of Eq. (26).

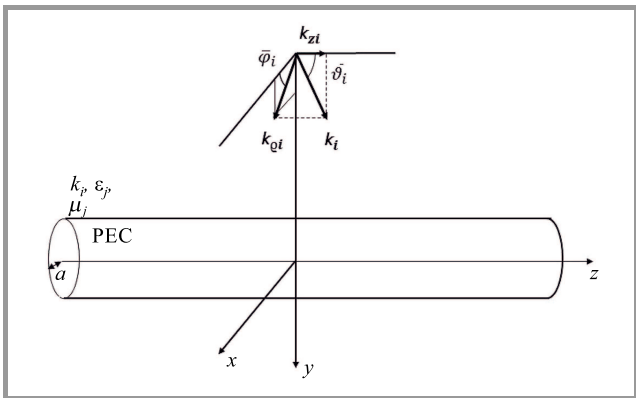


Fig. 4. Statement of the validation problem. A complex wave vector of an inhomogeneous plane wave (with ϑ and $\varphi \in I$) is impinging on an infinite circular PEC cylinder with radius a and with its longitudinal axis parallel to axis z .

3. Validation and Numerical Results

Validation was performed by comparing the determined formulation and the canonical case of electromagnetic scattering. In particular, an infinite PEC cylinder has been considered and Eqs. (25) and (26) have been taken into consideration. Equation (25) has been validated considering the inhomogeneous plane wave with the following parameters $k = 2 - i2$ 1/m, $\rho = [0, 1]$ m, $\vartheta = \pi/2$, $\varphi = [-\pi, \pi]$. The results representing the inhomogeneous plane wave and its representation in the form of a VCH superposition were found to be perfectly compatible (see Fig. 2). Subsequently, the most general case of an inhomogeneous plane wave with φ complex was validated. In particular, the following fictitious parameters of $k = 2 - i2$ 1/m, $\rho = [0.1, 1]$ m, $\vartheta = \pi/2$, $\varphi = [-\pi + i, \pi + i]$ were considered. Once again, the comparison between the inhomogeneous plane wave and its representation in the form of a VCH superposition showed that they are perfectly stackable (see Fig. 3).

After the validation, the actual method to study the scattered electric field by an infinite PEC cylinder immersed in a lossy medium was implemented (see Fig. 4). For this purpose, the following representation of the electric scattered field was considered [32], [35]:

$$\mathbf{E}_{sc}(k^* \mathbf{r}) = \sum_{m=-\infty}^{+\infty} \left[c_m \mathbf{M}_m^{(3)}(k^* \mathbf{r}) + d_m \mathbf{N}_m^{(3)}(k^* \mathbf{r}) \right], \quad (30)$$

having indicated with the apex ⁽³⁾ that we are considering the third Bessel function in the VCHs, and where:

$$c_m = -a_m \frac{J_m(k_p^* a)}{\dot{H}_m^{(1)}(k_p^* a)}, \quad (31)$$

$$d_m = -b_m \frac{J_m(k_p^* a)}{H_m^{(1)}(k_p^* a)}, \quad (32)$$

are the scattering coefficients [32], and where a is the cylinder radius.

To validate this last scenario, the results obtained by verifying Eq. (31) in Matlab and COMSOL were compared. The results were computed based on the following input values: frequency 300 MHz, $\varphi_i = 0$ rad, $E_{0h} = 1$ V/m, $E_{0v} = 0$ V/m, $\varepsilon = 1 + i$ (relative dielectric constant), $\mu = 1$ (relative magnetic permeability), cylinder radius 12.5 cm, $\xi = \pi/8$ rad, and $\eta = \pi/6$ rad. The scattered electric field was calculated along the line $x = -25$ cm, $y = [-25 \div 25]$ cm, and $z = 0$ cm. Figure 5 shows the results achieved with two different numerical methods, with a perfect match between them.

4. Conclusions

In this paper, a rigorous method applied in order to expand an elliptically polarized plane wave that is inhomogeneous in terms of vectorial cylinder harmonics is presented. The solution has been achieved using the complex-angle formalism focusing on the problem of determining the expansion

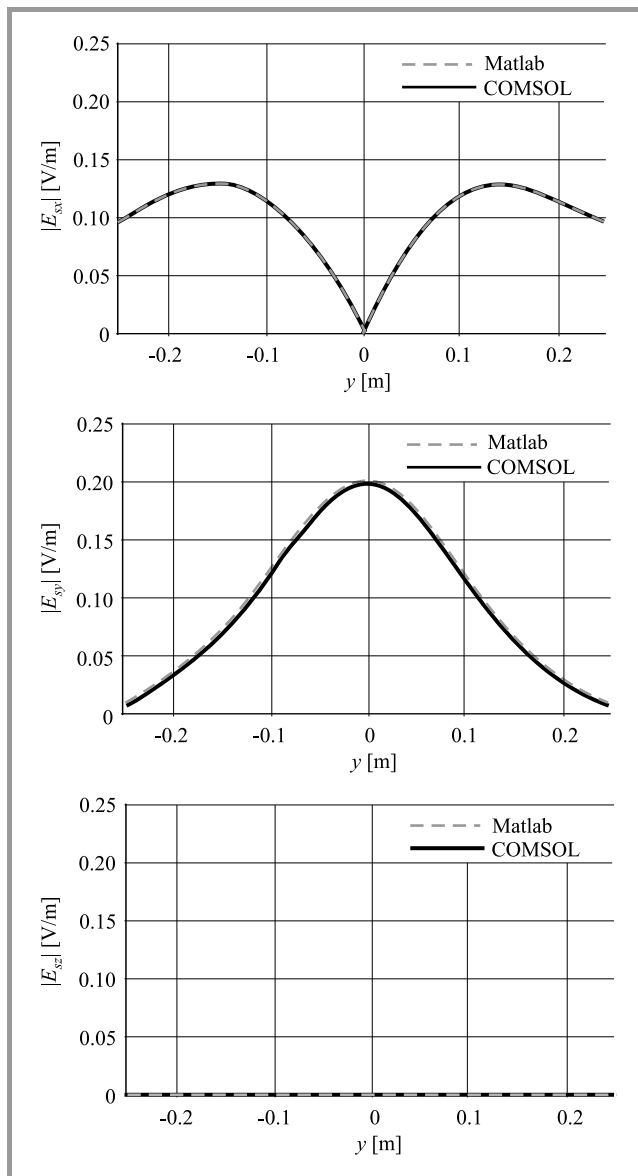


Fig. 5. Comparison of numerical results obtained with Matlab code (red, dashed line) and COMSOL simulations (blue, solid line) for the three components of the scattered electric field along a line of the following coordinates: $x = -25$, $y = [-25 \div 25]$, $z = 0$ cm.

coefficients. In this way, an elegant and light formalism was obtained. To validate the procedure, some numerical results have been presented. Furthermore, comparisons with simulations performed in the COMSOL environment have been performed. In particular, the case of scattering caused by a perfectly conductive electric cylinder with a circular section and of infinite length was considered to compare the results, and perfect accordance was reached in all scenarios. Thanks to the minimal invasiveness of the formalism, the cylindrical harmonics defined for the complex angle enjoy all the same properties as the simple cylindrical harmonics. Therefore, they are elegantly applicable to more complex cases, such as an ensemble of cylinders or cylinders buried in lossy media.

References

- [1] G. Mie, "Beitrage zur Optik truber medien, speziell kolloidaler met-allosungen", *Ann. Physik*, vol. 25, 1908 (doi: 10.1002/andp.19083300302) [in German].
- [2] J. R. Parry, "Electromagnetic scattering from cylinders of arbitrary cross-section in a conductive half-space", *Geophysics*, vol. 36, no. 1, pp. 1–217, 1971 (doi: 10.1190/1.1440165).
- [3] P. Latimer, "Light scattering by ellipsoids", *J. of Colloid and Interf. Sc.*, vol. 53, no. 1, pp. 102–109, 1975 (doi: 10.1016/0021-9797(75)90039-9).
- [4] C. A. Balanis, *Advanced Engineering Electromagnetics*, 2nd ed. Wiley, 2012 (ISBN: 9780470589489).
- [5] J. J. Bowman, T. B. A. Senior, and P. L. E. Uslenghi, *Electromagnetic and Acoustic Scattering by Simple Shapes*. Amsterdam: North-Holland Publishing Company, 1969 (ISBN: 9780720401523).
- [6] T. Rother, *Electromagnetic Wave Scattering on Nonspherical Particles*. New York: Springer, 2009 (ISBN: 9783642007033).
- [7] F. Frezza and F. Mangini, "Electromagnetic scattering by a buried sphere in a lossy medium of an inhomogeneous plane wave at arbitrary incidence: Spectral-domain method", *J. of the Optic. Soc. of America A*, vol. 33, no. 5, pp. 947–953 (doi: 10.1364/JOSAA.33.000947).
- [8] R. Borghi, F. Gori, M. Santarsiero, F. Frezza, and G. Schettini, "Plane-wave scattering by a perfectly conducting circular cylinder near a plane surface: cylindrical-wave approach", *J. of the Optic. Soc. of America A*, vol. 13, no. 3, pp. 483–493, 1996 (doi: 10.1364/JOSAA.13.000483).
- [9] T. Wriedt and A. Doicu, "Light scattering from a particle on or near a surface", *Optics Commun.*, vol. 152, no. 4–6, pp. 376–384, 1998 (doi: 10.1016/S0030-4018(98)00099-6).
- [10] A. Doicu, T. Wriedt, and Y. A. Eremin, *Light Scattering by Systems of Particles*. New York: Springer, 2006 (ISBN: 9783540336969).
- [11] S.-C. Lee and A. Grzesik, "Light scattering by closely spaced parallel cylinders embedded in a semi-infinite dielectric medium", *J. of the Optic. Soc. of America A*, vol. 15, no. 1, pp. 163–173, 1998 (doi: 10.1364/JOSAA.15.000163).
- [12] F. Frezza, F. Mangini, L. Pajewski, G. Schettini, and N. Tedeschi, "Spectral domain method for the electromagnetic scattering by a buried sphere", *J. of the Optic. Soc. of America A*, vol. 30, no. 4, pp. 783–790, 2013 (doi: 10.1364/JOSAA.30.000783).
- [13] F. Frezza, F. Mangini, and N. Tedeschi, "Electromagnetic scattering by two concentric spheres buried in a stratified material", *J. of the Optic. Soc. of America A*, vol. 32, no. 2, pp. 277–286, 2015 (doi: 10.1364/JOSAA.32.000277).
- [14] F. Mangini, N. Tedeschi, F. Frezza, and A. Sihvola, "Electromagnetic interaction with two eccentric spheres", *J. of the Optic. Soc. of America A*, vol. 31, no. 4, pp. 783–789, 2014 (doi: 10.1364/JOSAA.31.000783).
- [15] F. Mangini, N. Tedeschi, F. Frezza, and A. Sihvola, "Homogenization of a multilayer sphere as a radial uniaxial sphere: features and limits", *J. Electrom. Waves Appl.*, vol. 28, no. 8, pp. 916–931, 2014 (doi: 10.1080/09205071.2014.896480).
- [16] F. Frezza and F. Mangini, "Electromagnetic scattering of an inhomogeneous elliptically polarized plane wave by a multilayered sphere", *J. Electrom. Waves Appl.*, vol. 30, no. 4, pp. 492–504, 2016 (doi: 10.1080/09205071.2015.1121842).
- [17] F. Mangini and N. Tedeschi, "Scattering of an electromagnetic plane wave by a sphere embedded in a cylinder", *J. of the Optic. Soc. of America A*, vol. 34, no. 5, pp. 760–769, 2017 (doi: 10.1364/JOSAA.34.000760).
- [18] F. Frezza *et al.*, "In silico validation procedure for cell volume fraction estimation through dielectric spectroscopy", *J. of Biological Phys.*, vol. 41, no. 3, pp. 223–234, 2015 (doi: 10.1007/s10867-014-9374-8).
- [19] S. N. Samaddar, "Scattering of plane waves from an infinitely long cylinder of anisotropic materials at oblique incidence with an application to an electronic scanning antenna", *Appl. Scient. Res. B*, vol. 10, pp. 385–411, 1962 (doi: 10.1007/BF02923451).

- [20] X. B. Wu and W. Ren, "Wave-function solution of plane-wave scattering by an anisotropic circular cylinder", *Microw. and Opt. Technol. Lett.*, vol. 8, no. 1, pp. 39–42, 1995 (doi: 10.1002/mop.4650080114).
- [21] S.-C. Mao and Z.-S. Wu, "Scattering by an infinite homogeneous anisotropic elliptic cylinder in terms of Mathieu functions and Fourier series", *J. of the Optic. Soc. of America A*, vol. 25, no. 12, pp. 2925–2931, 2008 (doi: 10.1364/JOSAA.25.002925).
- [22] E. I. Ivlev, "Structure and properties of inhomogeneous waves", *J. of Modern Optics*, vol. 34, no. 12, pp. 1559–1569, 1987 (doi: 10.1080/09500348714551491).
- [23] E. I. Ivlev, "The scattering of inhomogeneous electromagnetic waves by a cylinder", *J. of Modern Optics*, vol. 39, no. 3, pp. 499–507, 1992 (doi: 10.1080/09500349214550491).
- [24] R. B. Adler, L. J. Chu, and R. M. Fano, *Electromagnetic Energy Transmission and Radiation*. MIT Press Classics, 1968 (ISBN: 9780262511407).
- [25] F. Frezza and F. Mangini, "Vectorial spherical-harmonics representation of an inhomogeneous elliptically polarized plane wave", *J. of the Optic. Soc. of America A*, vol. 32, no. 7, pp. 1379–1383, 2015 (doi: 10.1364/JOSAA.32.001379).
- [26] C. F. Bohren and D. R. Huffman, *Absorption and Scattering of Light by Small Particles*. Wiley, 1998 (ISBN: 9780471293408).
- [27] J. A. Stratton, *Electromagnetic Theory*. New York and London: McGraw-Hill, 1941 (ISBN: 978-0070621503) [Online]. Available: <https://archive.org/details/electromagnetict031016mbp/page/n5>
- [28] M. Kerker, *The Scattering of Light*. New York, San Francisco and London: Academic Press, 1969 (ISBN: 9781483191744).
- [29] M. Born and E. Wolf, *Principles of Optics*, 7th ed. London: Cambridge Press, 1999 (ISBN: 9781139644181).
- [30] L. Tsang, J. A. Kong, and K. H. Ding, *Scattering of Electromagnetic Waves: Theory and Applications*. New York: Wiley, 2000 (ISBN: 9780471224280).
- [31] J. G. Van Bladel, *Electromagnetic Fields*, 2nd ed. New Jersey: Wiley, 2007 (ISBN: 9780471263883).
- [32] F. Frezza, F. Mangini, and N. Tedeschi, "Introduction to electromagnetic scattering: tutorial", *J. of the Optic. Soc. of America A*, vol. 35, no. 1, pp. 163–173, 2018 (doi: 10.1364/JOSAA.35.000163).
- [33] M. Abramowitz and I. Stegun, *Handbook of Mathematical Functions*. New York: Dover Publ., 1972 (ISBN: 9780486612720).
- [34] G. Cincotti, F. Gori, F. Frezza, F. Furnò, M. Santarsiero, and G. Schettini, "Plane-wave expansion of cylindrical functions", *Optics Commun.*, vol. 95, pp. 192–198, 1993 (doi: 10.1016/0030-4018(93)90661-N).
- [35] X.-S. Zhou, *Vector Wave Functions in Electromagnetic Theory*. Rome: Aracne, 1994 (ISBN: 9788879990714).



Fabio Mangini received his B.Sc. in Clinical Engineering in 2005 and M.Sc. degree in Biomedical Engineering "cum laude" from "La Sapienza" University of Rome, Italy in 2008. He earned his Ph.D. in Electromagnetism from the Department of Information Engineering, Electronics and Telecommunications of the same University in 2014. In June 2014 and in May 2015, he won the prize "Young Scientist Award" from URSI (Interna-

tional Union of Radio Science). In January 2017, he won the "PhD ITalents" prize, and in October 2018, he won the "Marabelli prize". between 2009 and 2015 he worked at the Laboratory of Electromagnetic Fields II at "La Sapienza" University of Rome. His research activities focus on guiding structures, numerical methods, theoretical scattering models, optical propagation, anisotropic media, metamaterials, biomedical applications, and cultural-heritage applications. Since April 2019, he has been working as a researcher at the Electromagnetic Fields and Photonics Group at the University of Brescia.

 <https://orcid.org/0000-0001-5474-8952>

E-mail: fabio.mangini@unibs.it

Department of Information Engineering (DII)

University of Brescia

Via Branze 38

25123 Brescia, Italy

Department of Information Engineering, Electronics and Telecommunications (DIET)

"La Sapienza" University of Rome

Via Eudossiana 18

00184 Rome, Italy



Lorenzo Dinia received his M.Sc. in Biomedical Engineering in Rome, earning a 4.0 GPA. In 2014, he received a second M.Sc. in Industrial Engineering from the NYU Tandon School of Engineering. In February 2019, he completed a Ph.D. program in Mathematical Models for Engineering, Electromagnetics and

Nanosciences, majoring in Electromagnetics, at the "La Sapienza" University of Rome. The primary topic of his research was the fiber Bragg grating sensor and its applications – mainly the conservation of the original condition of artwork. He has three years of experience as a medical equipment Maintenance Manager at two major hospitals in Rome. He was responsible for coordinating the work of a team of technicians performing corrective and preventive maintenance and quality inspections. During his professional career, he held different engineering roles in the USA. In 2015, he was a Process Technical Engineer at a manufacturing company in Brooklyn. In 2016, he worked as a Field Service Engineer at a packaging company in New Jersey, and, currently, he is working as a Quality Engineer II at a company manufacturing medical equipment.

 <https://orcid.org/0000-0001-5725-0930>

E-mail: lorenzo.dinia@gmail.com

Department of Information Engineering, Electronics and Telecommunications (DIET)

"La Sapienza" University of Rome

Via Eudossiana 18


00184 Rome, Italy



Fabrizio Frezza received his “Laurea” (degree) “cum laude” in Electronic Engineering in 1986 and his Ph.D. degree in Applied Electromagnetics and Electrophysical Sciences in 1991, both from “La Sapienza” University of Rome. In 1986, he joined the Department of Electronics of the same University, where he held the position of

a Researcher from 1990 to 1998, a temporary Professor of Electromagnetic Fields from 1994 to 1998, an Associate Professor from 1998 to 2004. He has been a Full Professor of Electromagnetic Fields since 2005. His research activities focus on electromagnetic waveguides, antennas and resonators, mathematical and numerical methods, electromagnetic scattering, optics, free electromagnetic propagation, thermonuclear-plasma heating, anisotropic media,

artificial materials and metamaterials, plasmonics, biomedical applications, cultural-heritage and environment applications, application of artificial intelligence in electromagnetic sensing and diagnostics, magnetic-resonance applications, electrical transmission lines, electromagnetic compatibility, spectroscopy, terahertz applications, technological transfer, history of science and technology. He is the author of over 500 scientific papers and 3 patents and an author or editor of 4 scientific books; he has also authored 4 textbooks on basic and advanced electromagnetics. Dr. Frezza is a Member of Sigma Xi and a Senior Member of IEEE and OSA.

 <https://orcid.org/0000-0001-9457-7617>

E-mail: fabrizio.frezza@uniroma1.it

Department of Information Engineering, Electronics and Telecommunications (DIET)

“La Sapienza” University of Rome

Via Eudossiana 18

00184 Rome, Italy