

# METROLOGICAL ANALYSIS OF DIFFERENT TECHNIQUES FOR MEASURING INTERFACE TENSION BETWEEN TWO FLUIDS BASED ON SPINNING DROP METHOD

Igor Kisil, Olga Barna, Yuri Kuchirka

Ivano-Frankivsk National Technical University of Oil and Gas, Department of Methods and Devices of Quality Control and Product Certification

**Abstract.** The spinning drop method foundations of measuring interface tension between two immiscible liquids are considered. Different techniques of the spinning drop method and their metrology evaluation are compared. The dimensionless parameters of spinning drop are calculated using the fourth-order Runge–Kutta procedure and they are approximated by the seventh-order polynomial dependence. The relative errors of the different techniques and the approximate dependence are obtained.

**Keywords:** interface tension, spinning drop method, metrology, error analysis

## METROLOGICZNA ANALIZA RÓŻNYCH TECHNIK POMIARU NAPIĘCIA POWIERZCHNIOWEGO NA GRANICY FAZ POMIĘDZY DWOMA PŁYNAMI NA BAZIE METODY WIRUJĄCEJ KROPLI

**Streszczenie.** W artykule rozpatrywane podstawy metody wirującej kropli do pomiaru napięcia powierzchniowego na granicy faz między dwoma nie mieszającymi się cieczami. Porównano różne techniki realizacji tej metody i oceniono ich właściwości metrologiczne. Wykorzystując metodę numeryczną Rungego–Kutty 4 rzędu obliczono bezwymiarowe parametry wirującej kropli i aproksymowano za pomocą wielomianu 7 stopnia. Obliczono błąd względny różnych technik oraz proponowanej przybliżonej zależności.

**Słowa kluczowe:** napięcie powierzchniowe, metoda wirującej kropli, metrologia, analiza błędów

### Introduction

Interface tension (IT) at the interface of two insoluble liquids is a significant parameter of the technological processes where surface characteristics at the interface are essential. This is especially important in the oil production methods with the help of reservoir pressure maintenance using surfactants (SAA) [3]. It should also be noted that IT can vary in the range of 0.01÷20 mN/m.

Table 1. Tabular data of dependence  $V^* = f(R/x_0)$  [5]

| $R/X_0$ | $r^*$  | $R/X_0$ | $r^*$  |
|---------|--------|---------|--------|
| 1.0     | 0      | 0.3198  | 1.2520 |
| 0.9997  | 0.1    | 0.3122  | 1.2530 |
| 0.9980  | 0.2    | 0.3038  | 1.2540 |
| 0.9932  | 0.3    | 0.2945  | 1.2550 |
| 0.9840  | 0.4    | 0.2837  | 1.2560 |
| 0.9687  | 0.5    | 0.2708  | 1.2570 |
| 0.9459  | 0.6    | 1.2543  | 1.2580 |
| 0.9140  | 0.7    | 0.2297  | 1.2590 |
| 0.8710  | 0.8    | 0.2262  | 1.2591 |
| 0.8148  | 0.9    | 0.2225  | 1.2592 |
| 0.7415  | 1.0    | 0.2183  | 1.2593 |
| 0.6432  | 1.1    | 0.2136  | 1.2594 |
| 0.4928  | 1.2    | 0.2081  | 1.2595 |
| 0.3332  | 1.2500 | 0.2016  | 1.2596 |
| 0.3268  | 1.2510 | 0.1932  | 1.2597 |

Measurement of such IT values is usually carried out with the help of the devices that implement the spinning drop method (SD) [5]. The essence of the SD method consists in the following: a horizontally placed glass tube is filled with such a heavier fluid under study as aqueous surfactant solution; after that a drop of such a lighter fluid under investigation as oil is injected into this fluid; then the tube is revolved around its horizontal axis with a certain angular velocity  $\omega$ . Both the appropriate SD dimensions (for example, its largest diameter, length, and volume) and the density difference of the interfacial fluids are measured depending on the selected techniques for determining IT; the IT values  $\sigma$  [4, 6–8] are calculated with the help of the corresponding dependencies [4, 6–8].

Among such dependencies, regardless of the date when their authors published them, the following are wide spread now B. Vonnegut's dependence [1]:

$$\sigma = \Delta\rho\omega^2 R^3/4 \quad (1)$$

where  $\Delta\rho = \rho_1 - \rho_2$  – density difference between the heavier and lighter fluids respectively,  $R$  – the largest SD radius. H. Princen's dependence [4]:

$$\frac{x_0}{r} = \frac{2}{3} \frac{cr^3 + 1}{(cr^3)^{1/3}}, \quad (2)$$

where  $x_0$  – half of the SD length;  $r = \sqrt[3]{3V/(4\pi)}$  – sphere radius of the lighter fluid with the volume  $V$  that is injected into the tube with the heavier fluid;  $c = \Delta\rho\omega^2/(4\sigma)$  – a characteristic parameter that is used to calculate the IT  $\sigma$  on the basis of the H. Princen's dependence. J. Slattery's dependence [6]:

$$\sigma = (R/r^*)^3 \Delta\rho\omega^2/2, \quad (3)$$

where  $r^*$  – dimensionless parameter which is determined on the basis of the appropriate J. Slattery's table [6] depending on the ratio  $R/x_0$  (table 1). S. Torza's dependence [7]:

$$\sigma = \pi^{-3/2} \Delta\rho\omega^2 (V/x_0)^{3/2}/4. \quad (4)$$

It should be noted that B. Vonnegut recommends to use dependence (1) provided that  $x_0/R > 4$  [3]. H. Princen suggests to utilize dependence (2) on the condition that  $x_0/R > 3,645$  [4]. Dependence (3), as J. Slattery [6] notes, has a method error of less than 0.4% provided that  $x_0/R > 4$ . S. Torza recommends to use dependence (4) for  $cr^3 > 100$  [7] that corresponds to relation  $x_0/R > 67$ .

Taking into account the abovementioned, it is necessary to evaluate the method errors of the suggested techniques to calculate IT  $\sigma$  with the help of the SD method and develop recommendations for their elimination.

### 1. Theoretical Part

Let us conduct theoretical calculation of the SD geometrical dimensions in order to evaluate method errors of the abovementioned techniques.

Let us consider the horizontal rotating tube, inside of which there is fluid 2 with higher density  $\rho_2$  and a drop of fluid 3 with lesser density  $\rho_1$  (Fig. 1). Let the pressure on the y axis inside the drop (pt. O) be equal to  $P_{O1}$  and outside the drop –  $P_{O2}$ . At the

same time, we neglect the gravitational force, which allows us to suggest that the rotation axes of the tube 1 and drop 3 coincide.

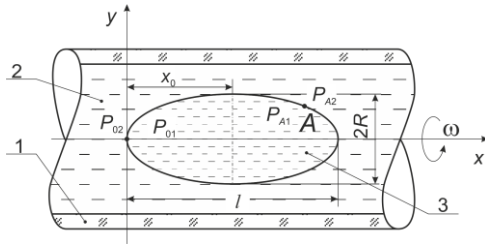


Fig. 1. Rotating tube with investigated heavier and lighter fluids

Then the pressure  $P_{A1}$  inside the drop in pt. A is as the following:

$$P_{A1} = P_{O1} + \rho_1 y^2 \omega^2 / 2, \quad (5)$$

where  $y$  – distance from pt. A to the  $x$  axis.

Correspondingly, the pressure outside the drop in pt. A is as follows:

$$P_{A2} = P_{O2} + \rho_2 y^2 \omega^2 / 2. \quad (6)$$

Hence, the pressure difference along the interface of two fluids in pt. A is as the following:

$$P_{A1} - P_{A2} = P_{O1} - P_{O2} - \Delta \rho y^2 \omega^2 / 2. \quad (7)$$

In case there is gravitational force, the drop rotation axis shifts in relation to the tube rotation axis by the value which is equal to  $y^* \approx R^2 \Delta \rho g / (\eta \omega)$  [7], where  $g$  – gravitational acceleration,  $\eta$  – dynamic viscosity of the heavier fluid. However, the SD form doesn't change therewith.

On the other hand the pressure difference along the interface in pt. A will be as follows:

$$P_{A1} - P_{A2} = \sigma (1/R_1 + 1/R_2), \quad (8)$$

where  $R_1$  i  $R_2$  – curvature radii of the drop surface in pt. A in the plane of fig. 1 and in the plane that is perpendicular to the plane of Fig. 1 respectively [2].

Besides, the pressure difference  $\Delta P_0$  along the interface on the level of the horizontal rotation  $x$  axis in pt. O will be as the following [1]:

$$P_{O1} - P_{O2} = \Delta P_0 = 2\sigma / R_0, \quad (9)$$

where  $R_0$  – curvature radius of the SD interface surface in pt. O (Fig. 1).

Then, when we take into account dependencies (8) and (9), dependence (7) will be as the following:

$$\sigma (1/R_1 + 1/R_2) = 2\sigma / R_0 - \Delta \rho y^2 \omega^2 / 2. \quad (10)$$

Equation (10) is a strict equation that describes the SD surface form in relation to  $\sigma$ ,  $\Delta \rho$  and  $\omega$  when there is no gravitation.

Since  $R_1 = ds/d\varphi$ ,  $R_2 = y/\sin\varphi$ , where  $s$  – SD profile arc length,  $\varphi$  – angle between the  $x$  axis and normal to pt. A on the SD surface [2], (10) will have the following form after corresponding transformations:

$$d\varphi/ds = 2/R_0 - \omega^2 y^2 \Delta \rho / (2\sigma) - \sin\varphi / y. \quad (11)$$

After introduction of the new variable  $a^3 = \sigma / (\Delta \rho \omega^2) = 1/(4c)$  we will see that

$$d\varphi/ds = 2/R_0 - y^2 / (2a^3) - \sin\varphi / y. \quad (12)$$

Having multiplied both the left and the right parts of (12) by  $a$ , we will obtain an equation in a dimensionless form that describes the SD surface:

$$\frac{d\varphi}{d(s/a)} = \frac{2}{R_0/a} - \frac{1}{2} \left(\frac{y}{a}\right)^2 - \frac{\sin\varphi}{y/a}. \quad (13)$$

Other variables, which are included in (13), can be determined with the help of the following dependencies [2]:

$$\frac{d(y/a)}{d(s/a)} = \cos\varphi, \quad \frac{d(V/a^3)}{d(s/a)} = \pi \left(\frac{y}{a}\right)^2 \sin\varphi, \quad \frac{d(x/a)}{d(s/a)} = \sin\varphi. \quad (14)$$

When solving (13) and (14) for different specified values of  $R_0/a$  at the moment when the angle reaches  $\varphi = 90^\circ$ , we find the corresponding SD geometrical parameters.

The initial boundary conditions are the following:

$$y = x = s = V = \varphi = 0, \quad 1/R_0 = 1/R_1 = 1/R_2; \quad (15)$$

and the final boundary conditions are as follows:

$$R/a = 4^{1/3}, \quad R_0/a = 2 \cdot 4^{1/3} / 3, \quad R/R_0 = 3/2. \quad (16)$$

When the final conditions of (16) are reached, there isn't any further increase in the parameters according to (16) and the SD surface becomes strictly cylindrical, i. e.  $R_1 = \infty$ ,  $R_2 = R$ .

## 2. Results and Discussion

Some of the results of the SD dimensionless parameters ( $R/a$ ,  $a^3/V$ ,  $x_0/R$ ,  $l^3/V$ ,  $R/R_0$ ,  $R/r$ ,  $cr^3$ ) calculated using the fourth-order Runge-Kutta method for solving equations (13) and (14) with the account of (15) and (16) for  $1.0 \leq R_0/a \leq 2 \cdot 4^{1/3} / 3$ ,  $\varphi = 90^\circ$  are provided in table 2, where  $l = 2x_0$ . It should be noted that the calculation was conducted for 2744 values of the parameter  $R_0/a$  with the calculation error of the final values being equal to  $2,22 \cdot 10^{-16}$ .

Table 2. Results of the SD geometrical parameters calculation

| $R_0/a$  | $R/a$    | $V/a^3$    | $l/(2R)$ | $l^3/V$    | $R/R_0$  | $R/r$    | $cr^3$    |
|----------|----------|------------|----------|------------|----------|----------|-----------|
| 1,058265 | 1,585254 | 83,667883  | 4,001111 | 24,398863  | 1,497974 | 0,026455 | 4,993559  |
| 1,058267 | 1,586014 | 90,016592  | 4,252025 | 27,256878  | 1,498691 | 0,024601 | 5,372470  |
| 1,058267 | 1,586504 | 96,333744  | 4,502207 | 30,262971  | 1,499153 | 0,022995 | 5,749497  |
| 1,058267 | 1,586808 | 102,334273 | 4,740190 | 33,268167  | 1,499439 | 0,021651 | 6,107627  |
| 1,058267 | 1,587030 | 109,126461 | 5,009843 | 36,845738  | 1,499649 | 0,020306 | 6,513006  |
| 1,058267 | 1,587143 | 114,414555 | 5,219926 | 39,760317  | 1,499756 | 0,019369 | 6,828616  |
| 1,058267 | 1,587353 | 138,749310 | 6,187515 | 54,629624  | 1,499954 | 0,015974 | 8,280989  |
| 1,058267 | 1,587358 | 140,300909 | 6,249233 | 55,658832  | 1,499959 | 0,015797 | 8,373594  |
| 1,058267 | 1,587373 | 146,649795 | 6,501791 | 59,971459  | 1,499974 | 0,015113 | 8,752515  |
| 1,058267 | 1,587383 | 152,919518 | 6,751218 | 64,390025  | 1,499983 | 0,014494 | 9,126711  |
| 1,058267 | 1,587389 | 159,141744 | 6,998768 | 68,932000  | 1,499989 | 0,013927 | 9,498073  |
| 1,058267 | 1,587393 | 164,319016 | 7,204750 | 72,830305  | 1,499992 | 0,013489 | 9,807069  |
| 1,058267 | 1,587396 | 172,931969 | 7,547433 | 79,555225  | 1,499996 | 0,012817 | 10,321117 |
| 1,058267 | 1,587398 | 177,396772 | 7,725076 | 83,159112  | 1,499997 | 0,012494 | 10,587590 |
| 1,058267 | 1,587399 | 184,315634 | 8,000363 | 88,902753  | 1,499998 | 0,012025 | 11,000529 |
| 1,058267 | 1,587400 | 190,601190 | 8,250454 | 94,288085  | 1,499999 | 0,011629 | 11,375671 |
| 1,058267 | 1,587400 | 196,981742 | 8,504326 | 99,917822  | 1,499999 | 0,011252 | 11,756482 |
| 1,058267 | 1,587400 | 202,950645 | 8,741819 | 105,333027 | 1,499999 | 0,010921 | 12,112724 |
| 1,058267 | 1,587401 | 210,692803 | 9,049869 | 112,571087 | 1,500000 | 0,010520 | 12,574800 |
| 1,058267 | 1,587401 | 221,870644 | 9,494620 | 123,447634 | 1,500000 | 0,009990 | 13,241929 |

The obtained results of the calculation were used to get approximate dependence  $a^3/V = f(l^3/V)$  of the following type:

$$a^3/V = \sum_{i=0}^7 C_i (l^3/V)^i, \quad (17)$$

where  $C_0 = 0,03227$ ;  $C_1 = -0,001722$ ;  $C_2 = 5,787 \cdot 10^{-5}$ ;

$C_3 = -1,18 \cdot 10^{-6}$ ;  $C_4 = 1,481 \cdot 10^{-8}$ ;  $C_5 = -1,117 \cdot 10^{-10}$ ;

$C_6 = 4,639 \cdot 10^{-13}$ ;  $C_7 = -8,14 \cdot 10^{-16}$ .

Then the IT value  $\sigma$  can be calculated in the following way:

$$\sigma = \Delta\rho\omega^2V \sum_{i=0}^7 C_i (l^3/V)^i. \quad (18)$$

Evaluation of the relative method errors  $\delta_m$  of B. Vonnegut, H. Princen, S. Torza, and J. Slattery's techniques, as well as of approximate dependence (18), was conducted by comparing the results of the IT  $\sigma$  calculation for each of the mentioned techniques with the results of the IT  $\sigma_{table}$  calculation on the basis of the data in table 2:

$$\sigma_m = (\sigma - \sigma_{table}) / \sigma_{table}. \quad (19)$$

The results of such error calculation are provided in table 3.

Table 3. Evaluation results of the errors  $\sigma_m$  of different techniques for IT  $\sigma$  calculation with the help of the SD method for  $4,0 \leq l/2R \leq 9,5$

| $l/2R$ | B. Vonnegut           | S. Torza | H. Princen | J. Slattery           | Dependence (18)       |
|--------|-----------------------|----------|------------|-----------------------|-----------------------|
| 4,0    | -0,00405              | -0,239   | 0,07828    | $6,61 \cdot 10^{-6}$  | $-6,38 \cdot 10^{-5}$ |
| 4,5    | -0,00169              | -0,213   | 0,05795    | $-2,79 \cdot 10^{-6}$ | -0,000277             |
| 5,0    | -0,000702             | -0,192   | 0,04273    | $-3,56 \cdot 10^{-6}$ | -0,000382             |
| 5,5    | -0,000260             | -0,173   | 0,03050    | $1,79 \cdot 10^{-6}$  | $7,34 \cdot 10^{-5}$  |
| 6,0    | $-9,12 \cdot 10^{-5}$ | -0,156   | 0,02158    | $-1,27 \cdot 10^{-6}$ | 0,000309              |
| 6,5    | $-5,28 \cdot 10^{-5}$ | -0,149   | 0,01813    | $1,21 \cdot 10^{-6}$  | $3,84 \cdot 10^{-5}$  |
| 7,0    | $-2,24 \cdot 10^{-5}$ | -0,139   | 0,01387    | $1,42 \cdot 10^{-6}$  | -0,000415             |
| 7,5    | $-8,05 \cdot 10^{-6}$ | -0,129   | 0,01042    | $4,08 \cdot 10^{-6}$  | $4,70 \cdot 10^{-5}$  |
| 8,0    | $-3,94 \cdot 10^{-6}$ | -0,122   | 0,00828    | $4,07 \cdot 10^{-6}$  | 0,000414              |
| 8,5    | $-1,65 \cdot 10^{-6}$ | -0,115   | 0,00644    | $-3,25 \cdot 10^{-6}$ | -0,000393             |
| 9,0    | $-7,09 \cdot 10^{-7}$ | -0,108   | 0,00507    | $2,73 \cdot 10^{-6}$  | 0,000151              |
| 9,5    | $-2,96 \cdot 10^{-7}$ | -0,103   | 0,00397    | $-3,41 \cdot 10^{-6}$ | $-2,07 \cdot 10^{-5}$ |

Thus, it can be seen from table 3 that B. Vonnegut, J. Slattery, and H. Princen's techniques, as well as approximate dependence (18), have a small method error in the indicated range of values  $l/2R$ . However, when implementing B. Vonnegut and J. Slattery's techniques there is a necessity to measure the largest SD radius  $2R$ , which is significantly influenced by the optical zoom factor  $\lambda$  of the tube with the fluids under study that can vary in the range from 1.332 to 1.34 [1]. Calculation of a certain  $\lambda$  value depends on many factors and it can lead to significant additional errors of the obtained results.

Therefore, it is advisable to use the techniques that do not involve measurement of the largest SD diameter  $2R$  (S. Torza and H. Princen's techniques and approximate dependence (18)). However, S. Torza and H. Princen's techniques are characterized by significant method errors.

Therefore, it is recommended to use approximate dependence (18) given that modern means for IT  $\sigma$  measurement are equipped with computer aids. This allows to easily develop the appropriate software that would consider dependence (18).

## References

- [1] Coucoulas L., Dawe R., Mahers E.: The refraction correction for the spinning drop. *Tensiometer. J Colloid and Interface Sci.* 93(1)/1983, 281–284.
- [2] Kisil I., Kisil R.: Measurement of Surface Properties on the Interface. *Methods of Maximum Bubble Pressure, Sessile and Pendant Drops and Volume Method.* Ivano-Frankivsk, 2010.
- [3] Mikhailiuk V.D.: Use of surfactants in the process of oil production in the fields of OJSC "UkrNafta". Ivano-Frankivsk. Galician printing PLUS, 2009.
- [4] Princen H., Zia Y., Mason S.: Measurement of Interfacial Tension from the Shape of a Rotating Drop. *Journal of Colloid and Interface Science*, 23/1967, 99–107.
- [5] Rusanov A.I., Prokhorov V.A.: *Interfacial Tensiometry.* Elsevier, Amsterdam, 1996.
- [6] Slattery J., Chen J.: Alternative Solution for Spinning Drop Interfacial Tensiometer. *Colloid Interface Science*, 64(2)/1978, 371–373.
- [7] Torza S.: The Rotating-bubble Apparatus. *Rev. Sci. Instrum.* 46(6)/1975, 778–783.
- [8] Vonnegut B.: Rotating Bubble Method for the Determination of Surface and Interfacial Tensions. *Rev. Sci. Instrum.* 13(6)/1942, 6–9.

### Ph.D. prof. Igor Kisil

e-mail: zarichna@nung.edu.ua

Head of the Department of Methods and Devices of Quality Control and Product Certification, Ivano-Frankivsk National Technical University of Oil and Gas (IFNTUOG), Ukraine.

Igor Kisil is Academician of the Ukrainian Oil and Gas Academy, State Prize of Ukraine in Science and Technology in 2010, the author of about 250 scientific papers and one monograph.

Research interests: environmental impacts of shale gas extraction, including hydraulic fracturing; measuring surface tension of surfactants solutions.



### Ph.D. Olga Barna

e-mail: osbarna@gmail.com

Assistant of the Department of Methods and Devices of Quality Control and Product Certification, IFNTUOG, Ukraine.

Research interests: measuring surface tension of surfactants solutions, environmental impacts of oil and gas extraction; mathematical modeling of physical processes; collection, processing and interpretation of measured data.



### Ph.D. Yuriy Kuchirka

e-mail: kuchirka.wsins@gmail.com

Assistant of Department of methods and instruments of quality control and product certification, IFNTUOG, Ukraine

Research interests: environmental impacts of shale gas extraction, including hydraulic fracturing; development of automatic measuring instruments; mathematical modeling of physical processes; measuring surface tension of surfactants solutions; collection, processing and interpretation of measured data; measuring the characteristics of ionizing radiation and nuclear constants.



otrzymano/received: 01.07.2015

przyjęto do druku/accepted: 01.07.2016