

JAN DRENDA\*<sup>#</sup>, GRZEGORZ PACH\*, ZENON RÓŻAŃSKI\*,  
PAWEŁ WRONA\*, JÓZEF SUŁKOWSKI\*\*

**SAFE WORKING CONDITIONS IN HOT MINE ENVIRONMENT – THE ANALYSIS  
OF DIFFERENT INDICES**

**BEZPIECZNE WARUNKI PRACY W GORĄCYM ŚRODOWISKU KOPALNI  
– ANALIZA RÓŻNYCH WSKAŹNIKÓW**

The article presents the discussion and practical examples relating to the interpretation of the notion of safe working areas in hot environment based on various indices (American Effective Temperature (ATE), climate equivalent temperature ( $t_{ze}$ ) and the Silesian temperature (TS)). The first, theoretical part includes an analysis of the allowable dry bulb temperatures in line with the threshold values for the specified indices in case of various relative humidity and airflow velocity values. Also, the variability of the studied allowable working areas was exhibited for hypothetical extreme cases (such as an airflow of 0 m/s or the relative humidity of  $\varphi = 0\%$ ) as well as for actual conditions registered in headings. The second part consisted in the analysis of the allowable full-time working conditions for two selected cases of driving roadways. The analysis was conducted for two indices applied in the first part and complemented with an appraisal considering the dry bulb temperature ( $t_a$ ) and the wet kata thermometer units ( $K_w$ ). It has been exhibited that while regulating the airflow and the dry bulb temperature in the heading, significant differences in the interpretations (ranges) of safe working areas occur depending on the index that is being used. The conducted works indicate that by applying air cooling in the heading (decreasing the psychrometric temperatures considering the thermodynamic process corresponding to sensible air cooling) or by increasing the airflow, the requirements of the microclimate indices are fulfilled in the following order: ATE,  $t_{ze}$ , TS.

**Keywords:** underground mining; thermal hazard; microclimate index

W artykule przedstawiono dyskusję oraz przykłady praktyczne dotyczące interpretacji obszarów pracy bezpiecznej w środowisku gorącym według różnych wskaźników (Amerykańska temperatura efektywna ATE, temperatura zastępcza klimatu  $t_{ze}$ , temperatura śląska TS). W pierwszej, teoretycznej części dokonano analizy dopuszczalnych wartości temperatury suchej według wartości granicznych dla wymienionych wskaźników dla różnych przypadków wilgotności względnej i prędkości powietrza.

\* SILESIA UNIVERSITY OF TECHNOLOGY, 2 AKADEMICKA STR., 44-100 GLIWICE, POLAND

\*\* JAN WYŻYKOWSKI UNIVERSITY, 6B SKALNIKÓW STR., 59-101 POLKOWICE, POLAND

# Corresponding author: Jan.Drenda@polsl.pl

Wykazano także zmienność badanych obszarów pracy dopuszczalnej dla hipotetycznych przypadków skrajnych (np. prędkość powietrza  $w = 0$  m/s lub wilgotność względna  $\varphi = 0\%$ ) jak i rzeczywistych, odnotowanych w wyrobiskach górniczych. W drugiej części przeprowadzono analizę warunków pracy dopuszczalnej w pełnym wymiarze godzin dla dwóch wybranych przykładów, dotyczących drażnionych wyrobisk korytarzowych. Analizę prowadzono dla wskaźników zastosowanych w części pierwszej i uzupełniono je o ocenę według temperatury suchej ( $t_s$ ) i katastrofni wilgotnych ( $K_w$ ). Przedstawiono, że przy regulacji zarówno prędkości powietrza jak i temperatury suchej w wyrobisku występują znaczne różnice w interpretacji (zakresie) obszarów pracy bezpiecznej w zależności od wykorzystanego wskaźnika. Z przeprowadzonych prac wynika, że stosując w wyrobisku schładzanie powietrza (zmniejszanie temperatur psychrometrycznych według przemiany termodynamicznej odpowiadającej chłodzeniu jawnemu powietrza) lub zwiększanie prędkości powietrza wymagania stawiane przez wskaźniki mikroklimatu spełniane są w następującej kolejności ATE,  $t_{zk}$ , TS.

**Słowa kluczowe:** górnictwo podziemne, zagrożenie cieplne, wskaźniki mikroklimatu

## 1. Introduction

The Faculty of Mining and Geology of the Silesian University of Technology was coordinating the works within the scientific project named „Opracowanie zasad zatrudniania pracowników w warunkach zagrożenia klimatycznego w podziemnych zakładach górniczych” (development of rules for employing workers in climatic hazard conditions in underground mining plants) which is one of the tasks of the „Poprawa bezpieczeństwa pracy w kopalniach” (improvement of work safety in mines) strategic programme (Drenda et al., 2014a). The partners in the project were the AGH Academy of Science and Technology, Faculty of Mining and Geoengineering, EMAG – Institute of Innovative Technologies, Institute of Occupational Medicine as well as the CEN-MED company. The consortium also included three Polish mining companies: Kompania Węglowa, S.A., Jastrzębska Spółka Węglowa S.A. and Katowicki Holding Węglowy S.A.

The studies were conducted in 24 Polish mines in the region of the Upper-Silesian Coal Basin.

The main purpose of the project was to develop methods for employing persons for work in hot mining environments and one of the partial aims was to determine the thermal conditions in underground mines. The purpose was achieved by measuring physical parameters of air and determining the microclimatic indices.

The article presents the results of considerations over the appraisal of thermal conditions according to microclimatic indices, namely the ATE,  $t_{zk}$  and TS indices. The ATE index is one of the oldest and was used in USA. Currently it is still applied in Germany. The  $t_{zk}$  index will become obligatory in line with the Polish provisions regarding the hazards in underground mining plants from 01.01.2018 (Ordinance, 2013). The TS index is a new proposal resulting from the works within the previously mentioned project (Drenda et al., 2014 a, b). The indices are based on the same physical parameters but each of them exhibits separate threshold values which are decisive for the allowable time of safe work. The appraisal giving consideration to these indices is different to the currently applied assessment based partially on the intensity of cooling index.

## 2. Thermal hazard in underground mining plants

The problem of assessing the thermal hazard in underground mining plants is the subject of many conducted studies (e.g. Waclawik et al., 1995; Waclawik, 2009; Yang & Innoue, 2012; Drenda, 1993). The works concern:

- The heat transfer between human and environment in hot environments (Knechtel, 2001; Bottomley et al., 1987),
- The practical solutions for reducing the hazard (Ramsden & Von Glehn, 2012),
- The appraisal of thermal conditions (Brake & Bates, 2002; Mitchel, 1971; Waclawik et al., 2013; Strumiński & Turkiewicz, 2003; Drenda, 2012).

Currently, approximately 60 microclimatic indices are applied worldwide (Brake & Bates, 2002). Several selected indices that are applied in countries where underground mining activity is or was conducted have been presented below.

In line with the provisions that are binding in Poland (Ordinance, 2002), the assessment of thermal hazard in the Polish underground mining plants is based on the dry bulb temperature values  $t_s$  and the intensity of air cooling  $K_w$ . In headings where self-propelled Diesel engine machines are applied, the assessment is conducted in line with the Polish Standard (PN-G-03100) based on the climate equivalent temperature  $t_{zk}$ . Since January 1st 2016, the assessment of climatic conditions is conducted based on the  $t_{zk}$  index in all mining plants (Ordinance, 2013).

Globally, various indices are used to assess the microclimate and thermal conditions. In Germany, for example, the assessment is conducted based on the TEF index, known in Poland as the American Effective Temperature – ATE. In Bulgaria and in the most countries of the former Soviet Union, the appraisal is conducted based on the dry bulb temperature value and the air humidity. In Belgium, Netherlands and France, an index called the Belgian Effective Temperature, BTE is applied. The Thermal Work Limit (TWL) index is used in Australia and United Arab Emirates. In USA, the air temperature, metabolism and the WBGT index are assessed. In Czech Republic the appraisal is conducted by determining the dry bulb and wet bulb temperatures, relative air humidity and the airflow velocity. In South Africa, the temperature of radiation of environment is measured besides the psychrometric temperatures.

### 2.1. The Analyzed Microclimate Indices

The American Effective Temperature (ATE), the climate equivalent temperature ( $t_{zk}$ ) and the Silesian Temperature (TS) were selected for a detailed analysis.

The indices are easy to determine (the simplest method of psychrometric measurement), based on the same parameters – dry bulb  $t_s$ , and wet bulb  $t_w$  temperatures and the air velocity (relative humidity in calculation of TS is indirectly dependent on  $t_s$  and  $t_w$ ).

#### a) American Effective Temperature, according to Yaglou

ATE is interpreted as the temperature of saturated still air characterized by the same cooling power as air in the given measurement point. ATE is determined based on the sample monogram shown in Fig. 1.

The threshold values for ATE are as follows (Frycz, 1981):

- When ATE is lower than 28°C – allowable working time is 8h,
- When ATE is within the range from 28°C to 32°C – the allowable working time is 6h,
- When ATE exceeds 32°C – the work is forbidden.

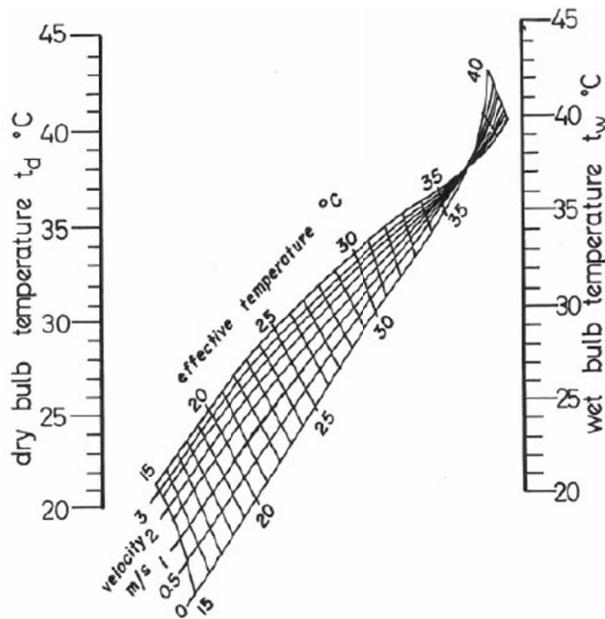


Fig. 1. An example of a monogram used in the determination of ATE for persons in typical working clothes.  
Source: Mc Phearson, 1993

b) Equivalent climate temperature ( $t_{zk}$ )

The  $t_{zk}$  index is calculated using the formula (1). It depends on the psychrometric temperatures ( $t_s$ ,  $t_w$ ) and the air velocity ( $w$ ).

$$t_{zk} = 0,4 \cdot t_s + 0,6 \cdot t_w - w \quad (1)$$

When  $t_{zk}$  is higher than 26°C, 3 levels of thermal hazard are introduced.

The 1<sup>st</sup> level of climatic hazard includes working posts at which the equivalent climate temperature is not higher than 30°C. The 2<sup>nd</sup> level includes working posts at which the equivalent climate temperature is higher than 30°C and does not exceed 32°C. The 3<sup>rd</sup> level of climatic hazard includes working posts at which the climate equivalent temperature is higher than 32°C or the wet bulb temperature is higher than 34°C or the air temperature measured with a dry bulb thermometer is higher than 35°C.

c) Silesian equivalent temperature (TS)

The TS index was developed as a result of analyses of impact of high velocities of air on the working conditions (Drenda et al., 2014a). TS is determined using the formula (2). It depends on the psychrometric temperatures ( $t_s$ ,  $t_w$ ), the air velocity ( $w$ ) and the relative humidity ( $\varphi$ ).

$$TS = 0,3 \cdot t_s + 0,7 \cdot t_w - (1,7 - \varphi) \cdot \varphi \cdot w \quad (2)$$

The obtained TS values have been presented below (Drenda, 2012):

(1) When TS is lower than 26°C – the allowable working time is 8h.

- (2) When TS is higher than 26°C and lower than 30°C – the allowable working time is 6h.
- (3) When TS is higher than 30°C – work is forbidden with the exception of rescue operations.
- (4) In case of air velocities exceeding 5 m/s, the air velocity shall be assumed to be 5 m/s.

## 2.2. The analysis of safe working areas in line with ATE, $t_{zk}$ and TS

While analyzing the dimensions of fields corresponding to the safe working areas in line with the above indices, one may note certain discrepancies. Below, an analysis of these discrepancies has been conducted for various air parameters, giving consideration to various relative air humidity and velocity values. It must, however, be stressed that references to low relative humidity values ( $\varphi = 0\%$ ) and air velocity of  $w = 0$  m/s are purely hypothetical and in mining (especially hard coal and copper) such values are not observed in underground headings. The following characteristic values of parameters have been assumed in the considerations:

- a) Air velocity
  - 0 m/s – hypothetical value, may occur in case of ventilation failure,
  - 0.3 m/s – minimal air velocity value resulting from the mining provisions binding in Poland (in roadway headings driven in fields of the 2<sup>nd</sup>, 3<sup>rd</sup> and 4<sup>th</sup> categories of methane hazard and in headings ventilated using streamlined air in methane fields),
  - 1.0 m/s – minimal air velocity in headings with electric traction in methane fields,
  - 3.0 m/s – maximal air velocity in headings registered within the project (Drenda et al. 2014a).
- b) Relative humidity
  - 0% – hypothetical extreme case,
  - 80% – a value often measured in headings during the works conducted within the project (Drenda et al. 2014),
  - 100% – extreme case occurring in underground mining.

The following is a comparative analysis of TS/ATE,  $t_{zk}$ /ATE, and TS/ $t_{zk}$  areas for previously mentioned cases, taking into account the resulting dry bulb temperature which should be observed at the excavation site so that the allowable values of the microclimate index are not exceeded. Figures 2, 3, and 4 show safe working areas in shifts reduced to 6h in accordance with the subsequent indices assuming the minimal airflow velocity as defined in the mining regulations equal to 0.3 m/s. For higher airflow velocity these areas will be larger. Figures 2, 3, and 4 only show their ranges as lines.

Tables 1-3 show the allowable values of dry bulb temperature in accordance with Fig. 2.

Table 1 presents the allowable values of dry bulb temperature for variable airflow velocity and relative humidity for the threshold value of  $t_{zk} = 32^\circ\text{C}$ . Red colour indicates values unallowable due the limitation of dry bulb and wet bulb temperatures. Table 1 shows that for  $t_{zk} = 32^\circ\text{C}$ , the lowest dry bulb temperature would be  $32.0^\circ\text{C}$  and it would correspond to  $w = 0$  m/s and  $\varphi = 100\%$ . The highest dry bulb temperature would be  $34.9^\circ\text{C}$  and would correspond to  $w = 1.0$  m/s and  $\varphi = 80\%$ . If there was no temperature limitation, the highest allowable temperature would be  $57^\circ\text{C}$ .

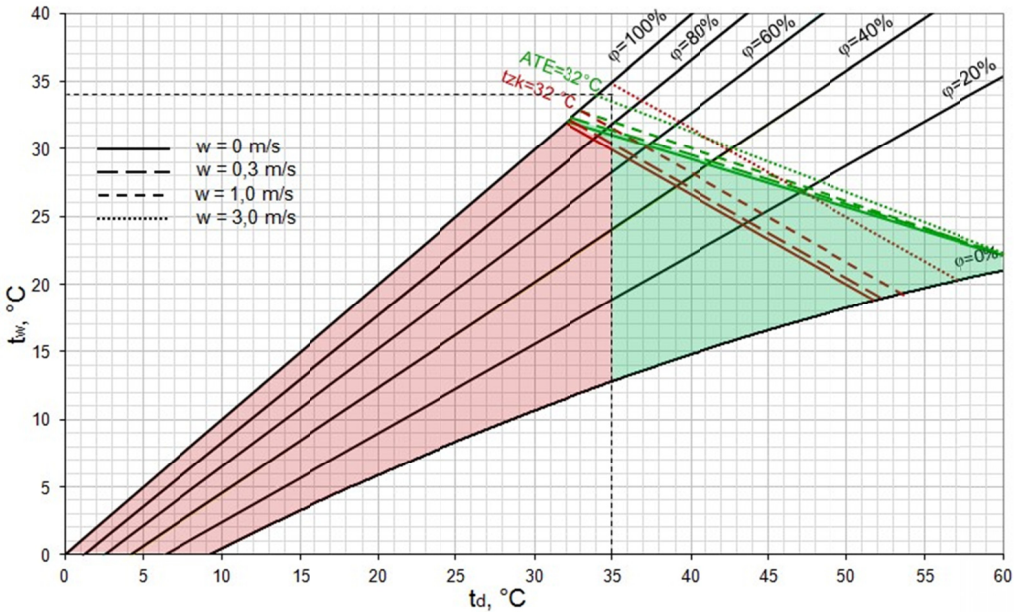


Fig. 2. Comparison of the allowable working conditions areas in time reduced to 6h in accordance with ATE (the sum of red and green cells) and  $t_{zk}$  (red cells) indices for airflow velocity of 0.3 m/s

TABLE 1

Allowable  $t_s$  values for variable airflow velocity ( $w$ ) and its relative humidity ( $\varphi$ ) for the threshold value of  $t_{zk} = 32^\circ\text{C}$

	$w = 0 \text{ m/s}$	$w = 0.3 \text{ m/s}$	$w = 1.0 \text{ m/s}$	$w = 3.0 \text{ m/s}$
$\varphi = 0\%$	51.6°C	52.0°C	53.5°C	57.0°C
$\varphi = 80\%$	33.9°C	34.2°C	34.9°C	37.0°C
$\varphi = 100\%$	32.0°C	32.3°C	33.0°C	35.0°C ( $t_w = 35^\circ\text{C}$ )

TABLE 2

Allowable values of  $t_s$  for variable airflow velocity ( $w$ ) and relative air humidity ( $\varphi$ ) for the threshold value of ATE = 32°C

	$w = 0 \text{ m/s}$	$w = 0.3 \text{ m/s}$	$w = 1.0 \text{ m/s}$	$w = 3.0 \text{ m/s}$
$\varphi = 0\%$	over 60°C	over 60°C	over 60°C	over 60°C
$\varphi = 80\%$	34.2°C	34.4°C	34.9°C	35.8°C
$\varphi = 100\%$	32.0°C	32.3°C	32.7°C	33.8°C

Table 2 presents the allowable values of dry bulb temperature for variables – airflow velocity and relative humidity – for the threshold value of ATE = 32°C. Table 2 indicates that for ATE = 32°C the lowest dry bulb temperature would be 32.0°C and it would correspond to  $w = 0 \text{ m/s}$  and  $\varphi = 100\%$  (the same as for  $t_{zk}$ ). Figure 2 indicates a significant difference in the size of areas corresponding to safe working conditions resulting from the use of ATE and  $t_{zk}$  indices.

Dry bulb temperature of 35.8°C would correspond to  $w = 3.0$  m/s and  $\varphi = 80\%$ . The comparison of the highest allowable  $t_s$  values (Tables 1 and 2) shows that the ATE index allows for work at temperatures higher by 0.9°C than the  $t_{zk}$  suggests.

Figure 3 shows a similar comparison for ATE and TS indices.

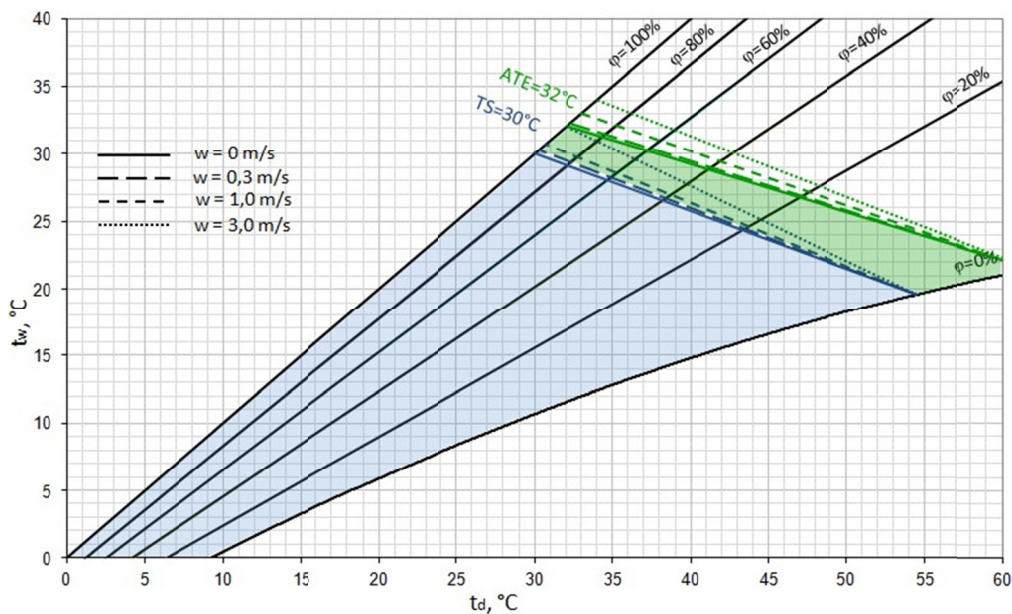


Fig. 3. Comparison of allowable working areas in shifts reduced to 6 h in accordance with ATE and TS indices for airflow velocity equal to 0.3 m/s

TABLE 3

Allowable values of  $t_s$  for variable airflow velocity ( $w$ ) and relative air humidity ( $\varphi$ ) for the threshold value of  $TS = 30^\circ\text{C}$

	$w = 0$ m/s	$w = 0.3$ m/s	$w = 1.0$ m/s	$w = 3.0$ m/s
$\varphi = 0\%$	54.2°C	54.2°C	54.2°C	54.2°C
$\varphi = 80\%$	32.0°C	32.1°C	32.8°C	34.0°C
$\varphi = 100\%$	30.0°C	30.2°C	30.9°C	32.2°C

Table 3 presents the allowable values for dry bulb temperatures for airflow velocity and relative humidity for the threshold value of  $TS = 30^\circ\text{C}$ . For the relative humidity of 0% a high allowable dry bulb temperature equal to 54.2°C has been observed. As highlighted in section 2.3, the assumption of a relative humidity value so low is only a hypothetical. While Table 2 shows that in the high relative humidity range of 80-100% (corresponding to mining conditions) for  $TS = 30^\circ\text{C}$  the lowest dry bulb temperature would be 30.0°C and would correspond to  $w = 0$  m/s and  $\varphi = 100\%$ . The highest dry bulb temperature would be 34.0°C and would correspond to  $w = 3.0$  m/s and  $\varphi = 80\%$ . It follows that according to TS index a dry bulb temperature equal to 35°C would not be exceeded.

Based on the analysis of Fig. 4, a significant difference between allowable working areas in accordance with TS and  $t_{zk}$  indices has been found. The area to the right of the isoline  $t_s = 35^\circ\text{C}$  and under the isoline  $\text{TS} = 30^\circ\text{C}$  for  $w = 0$  m/s indicates that the TS index could allow for working in headings with a dry bulb temperature lower than  $35^\circ\text{C}$  but at low relative humidity levels.

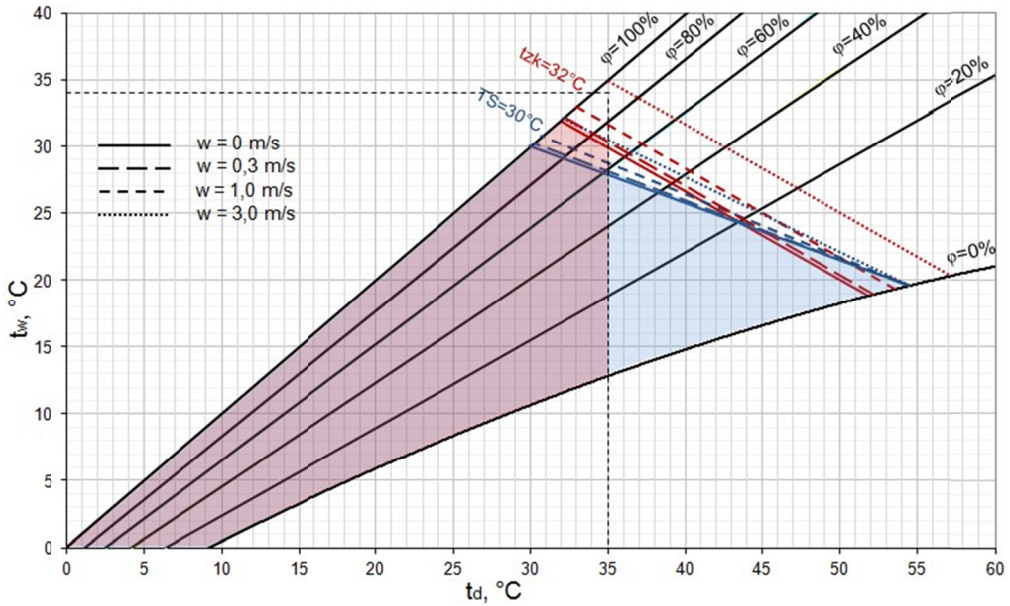


Fig. 4. Comparison of allowable working conditions areas in shifts reduced to 6 h in accordance with  $t_{zk}$  and TS indices for airflow velocity equal to 0.3 m/s

### 3. Examples of interpretation of safe working areas

Two cases were selected from the measuring stations in the driven headings for the analysis of interpretation of safe working areas resulting from the regulation of dry bulb temperature and airflow velocity. The measurement data has been summarised in Table 4. In the first case a variant regulation of  $t_s$  has been conducted at constant airflow velocity, and in the second case the variant regulation has been conducted at a constant dry bulb temperature.

TABLE 4

Examples of measurements in two selected driven roadway headings in one of the hard coal mines

$t_d$ °C	$t_w$ °C	$w$ m/s	$\varphi$ %	$p$ hPa	$K_w$ mcal/cm <sup>2</sup> s	$t_{zk}$ °C	TS °C	ATE °C	Comments
(1) Conveyor incline to 1100, depth 791m., primary rock mass temperature 50°C									
30.6	27.0	0.81	75.3	1080	10.7	27.6	27.5	27.5	heading I
(2) Excavation level 1050, depth 1118 m, primary rock mass temperature 41°C									
31.0	27.4	0.51	75.3	1115	9.4	28.3	28.1	28.2	heading II



The characteristic values of these parameters under consideration were so as to allow for full-time operation for the index values of  $ATE < 28^{\circ}\text{C}$ ,  $t_{zk} < 26^{\circ}\text{C}$ , and  $TS < 26^{\circ}\text{C}$ . Additionally, values of  $t_s$  i  $K_w$  valid until the end of 2015 were examined.

The analysis results are presented in subsections 3.1-3.2.

### 3.1. Example 1 – Conveyor incline to 1100, depth 791 m, primary rock mass temperature: $50^{\circ}\text{C}$

According to Table 4, the dry bulb temperature for 8 h working shift was exceeded by  $2.6^{\circ}\text{C}$ , while the cooling intensity was 0.3 wet kata thermometer unit lower than the required value. Measured  $t_{zk}$  and TS values exceeded the threshold by  $1.6^{\circ}\text{C}$  and  $1.5^{\circ}\text{C}$  respectively. The following are the characteristic values of  $t_s$  (variants 1 and 3) and  $w$  (variants 2 and 4). When these values are met, full-time working is permitted for the indices values of  $ATE < 28^{\circ}\text{C}$ ,  $t_{zk} < 26^{\circ}\text{C}$ , and  $TS < 26^{\circ}\text{C}$ . Reference to  $t_s$  and  $K_w$  has been included as additional information.

a) Heading I, Variant 1 – sensible cooling

TABLE 5

Variant 1 – effect of decrease in temperature on thermal conditions in heading I

No.	(1) Conveyor incline to 1100, depth 791 m., primary rock mass temperature $50^{\circ}\text{C}$								
	$t_s$ $^{\circ}\text{C}$	$t_w$ $^{\circ}\text{C}$	$w$ m/s	$p$ hPa	$K_w$ mcal/cm <sup>2</sup> s	$t_{zk}$ $^{\circ}\text{C}$	TS $^{\circ}\text{C}$	ATE $^{\circ}\text{C}$	Comments
1	30.6	27.0	0.81	1080	10.9	27.6	27.5	27.5	measured conditions
2	28.0	26.4	0.81	1080	11.5	26.2	26.3	26.1	condition met $t_s$ and $K_w$
3	27.5	26.3	0.81	1080	11.7	26.0	26.1	25.5	condition met $t_{zk}$
4	27.4	26.2	0.81	1080	11.8	25.9	25.9	25.4	condition met TS

Green area – allowable state; red area – unallowable state

Changes in dry bulb temperature and the resulting shift of subsequent characteristic points have been shown in Figure 5.

In the heading I the values of  $t_s = 30.6^{\circ}\text{C}$ ,  $t_w = 27.0^{\circ}\text{C}$ , and  $K_w = 10.9$  wet kata thermometer units were measured. In accordance with the current regulations it is necessary to reduce working shifts in the heading from 8 h to 6 h. In order to make the operations allowed on the full-time basis it is necessary to lower  $t_s$  to  $28^{\circ}\text{C}$ , which – according to Table 5 – will increase the value of  $K_w$  to 11.5. The  $t_{zk}$  threshold value will be achieved after lowering  $t_s$  to  $27.5^{\circ}\text{C}$ , and the threshold value TS requires a decrease of wet bulb temperature to  $27.4^{\circ}\text{C}$ . The same effect can be achieved by increasing the airflow velocity in a heading (variant 2 – Table 6).

b) Heading I, Variant 2 – increase in airflow velocity

In case of adjusting the indices by changing the velocity of air stream in the heading, the constant value  $t_s$  will be maintained. Due to regulations in force, the working time will not be extended and the ATE index allows for full-time work regardless of the adjustments conducted. However, the values of  $t_{zk}$  and TS may be adjusted to match the threshold values of 8h working shift. In case of  $t_{zk}$  this involves the increase in the airflow velocity to 2.45 m/s, and TS to 2.92 m/s.

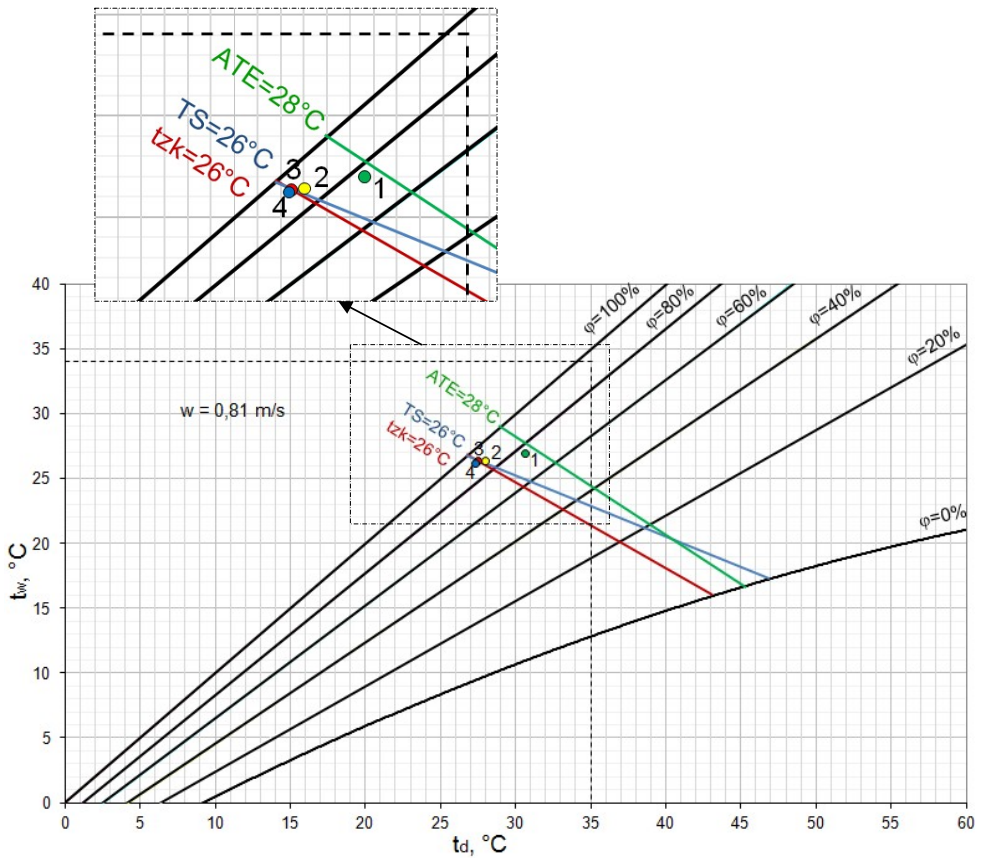


Fig. 5. Air cooling in accordance with variant 1 ( $w = 0.81 \text{ m/s}$ )

TABLE 6

Variant 2 – the effect of velocity increase on the thermal conditions in the heading I (1)

No.	(1) Conveyor incline to 1100, depth 791m, primary rock mass temperature 50°C								Comments
	$t_s$ °C	$t_w$ °C	$w$ m/s	$p$ hPa	$K_w$ mcal/cm <sup>2</sup> s	$t_{zk}$ °C	TS °C	ATE °C	
1	30.6	27.0	0.81	1080	10.9	27.6	27.5	27.5	measured conditions
2	30.6	27.0	0.85	1080	11.0	27.6	27.5	27.5	condition met $t_s$ and $K_w$
3	30.6	27.0	2.45	1080	15.0	26.0	26.3	25.9	condition met $t_{zk}$
4	30.6	27.0	2.92	1080	15.9	25.5	25.9	25.6	condition met TS

### 3.2. Example 2 – Drift at level 1050, depth 1118 m, primary rock mass temperature: 41°C

In this case, the allowable dry bulb temperature was exceeded by 3.0°C, while the cooling intensity was lower by 1.6 kata thermometer units than the required level. Designated values

$t_{zk}$  and TS exceeded the allowable values by 2.3°C and 2.1°C respectively. On the basis of the obtained results it may be stated that the thermal conditions in the excavation are more difficult than in the incline from Example I.

a) Heading II, Variant 1 – sensible cooling

TABLE 7

Variant 1 – effect of decrease of temperature on thermal conditions in heading II (2)

No.	(2) Excavation level 1050, depth 1118m, primary rock mass temperature 41°C								
	$t_s$ °C	$t_w$ °C	$w$ m/s	$p$ hPa	$K_w$ mcal/cm <sup>2</sup> s	$t_{zk}$ °C	TS °C	ATE	Comments
1	31.0	27.4	0.51	1115	9.4	28.3	28.1	28.2	measured conditions
2	28.0	26.6	0.51	1115	10.2	26.6	26.6	26.5	condition met $t_s$
3	26.8	26.3	0.51	1115	10.5	26.0	26.1	25.6	condition met $t_{zk}$
4	26.6	26.3	0.51	1115	10.5	25.9	25.9	25.6	condition met TS
5	25.8	25.8	0.51	1115	11.0	25.3	25.4	24.9	condition met $K_w$

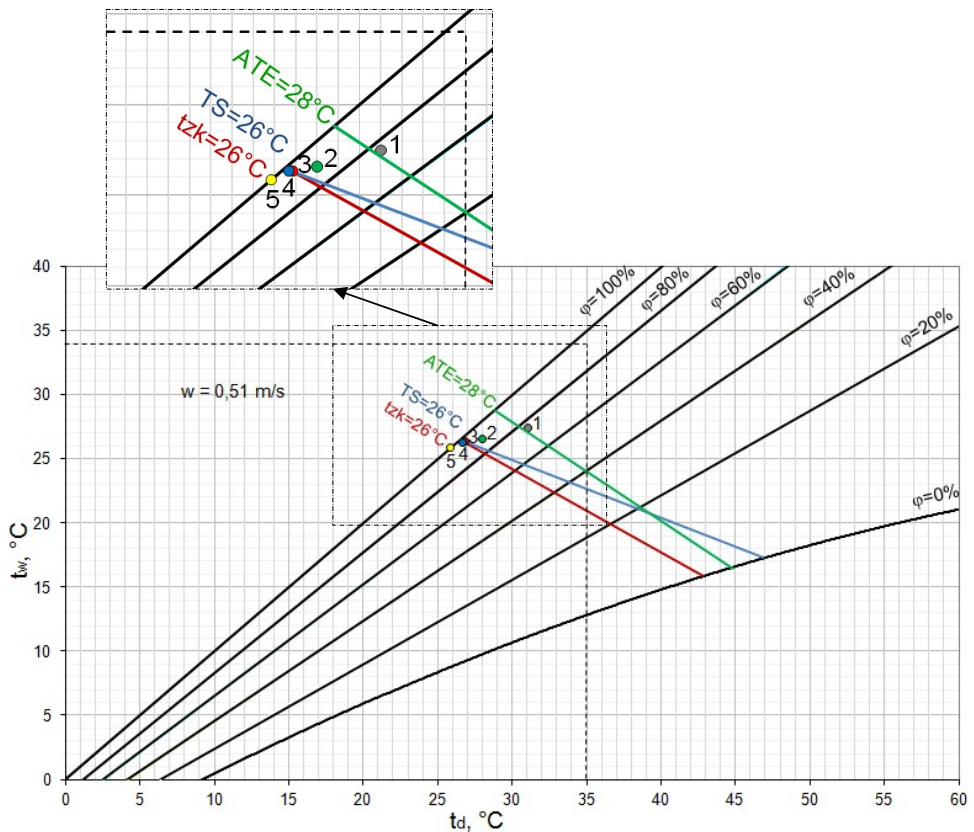


Fig. 6. Air cooling in accordance with variant 2 ( $w = 0.51$  m/s)

An 8 h working time, in accordance with the current regulations, would require lowering the dry bulb temperature to 25.8°C as then the requirement of cooling intensity  $K_w \geq 11.0$  would be met. Threshold value of  $t_{zk}$  would be achieved for  $t_s = 26.8^\circ\text{C}$ , and the threshold value of TS for  $t_s = 26.6^\circ\text{C}$ . ATE, for measured conditions only, exceeds the allowable value of 28°C.

b) Heading II, Variant 2 – increase of airflow velocity

TABLE 8

Variant 2 – effect of increase of airflow velocity on thermal conditions in heading II (2)

No.	(2) Excavation level 1050, depth 1118 m, primary rock mass temperature 41°C								
	$t_s$ °C	$t_w$ °C	$w$ m/s	$p$ hPa	$K_w$ mcal/cm <sup>2</sup> s	$t_{zk}$ °C	TS °C	ATE °C	Notes
1	31.0	27.4	0.51	1115	9.4	28.3	28.1	28.2	measured conditions
2	31.0	27.4	1.03	1115	11.0	27.8	27.7	27.7	condition met $K_w$
3	31.0	27.4	2.85	1115	15.1	26.0	26.4	26.1	condition met $t_{zk}$
4	31.0	27.4	3.5	1115	16.1	25.3	25.9	25.7	condition met TS

Similarly to example 1, it is not possible to achieve  $t_s = 28^\circ\text{C}$ , but the  $t_{zk}$  and TS threshold values would be achieved at the velocity of 2.85 m/s and 3.5 m/s respectively. ATE, for measured conditions only, exceeds the allowable value of 28°C.

#### Notes:

It should be noted that the air cooling intensity ( $K_w$ ) depends significantly on the airflow velocity and in practice the attempt to increase  $K_w$  by lowering the dry bulb temperature is not common. However, the first example demonstrates such a case. The increase of  $K_w$  amounted only to 0.1.

## 4. Conclusions

Adjustment of air parameters in a mining excavation influences the classification of the site in terms of the thermal hazard, but there are significant differences in the interpretation of this hazard depending on the indices used.

1. At low relative humidity values (especially at  $\varphi = 0\%$ ) the effect of airflow velocity on the value of TS and ATE indices is negligible and grows along the increase of  $\varphi$  (Fig. 3). However, the velocity isolines for  $t_{zk}$  are parallel, e.g. for  $t_{zk} = 32^\circ\text{C}$ , as shown in Fig. 4, which results in the same increase in velocity, regardless of  $\varphi$ .

2. When comparing ATE and  $t_{zk}$  indices, the safe working area is larger for ATE (Fig. 2). The limitation due to  $t_s \leq 35^\circ\text{C}$  and  $t_w \leq 34^\circ\text{C}$  introduced in the regulations (Ordinance 2013) additionally reduces the safe working area determined for the  $t_{zk}$  index.

3. In relation to the origin of the  $t_s - t_w$  coordinate system, threshold isolines for ATE are further from TS isolines for any identical velocities (Fig. 3). It follows that the safe working area is larger when employing ATE than when using TS.

4. When comparing the  $t_{zk}$  and TS indices (Fig. 4) isolines for threshold of TS (if the relative humidity exceeds 20%) are closer to the origin of the  $t_s - t_w$  coordinate system. For relative

humidity below 20% this relation is reversed. However, because of limitations due to  $t_s$  and  $t_w$  (for  $t_{zk}$  index) this cannot be taken into account.

5. In accordance with the TS index, safe work could be allowed in excavations with a dry bulb temperature above 35°C but low values of relative humidity.

6. According to Tables 1-3 (assumption of threshold values for tested indices) the effect of velocity on the allowable values of  $t_s$  (for stable, allowable values of relative humidity) is the highest for  $t_{zk}$ , leading to excessive dry bulb and wet bulb temperatures, hence the necessity to limit them, which is inappropriate for environments with air humidity lower than 80%.

7. The threshold value of the Silesian temperature  $TS = 30^\circ\text{C}$  was adopted on the basis of miners' climatic safety analysis based on the threshold of thermal discomfort index value of  $\delta = 1$ , taking into account the average energy expenditure of workers of various occupations and wearing lightweight work clothing. Adopting threshold temperatures such as  $t_{zk}$  and ATE equal to 32°C may pose a risk of thermal stress and heat stroke, especially for personnel who is non-acclimated and over 45 years of age (Drenda et al., 2014).

## Acknowledgment

The research was carried out within the strategic grant entitled "Poprawa bezpieczeństwa pracy w kopalniach" (improvement of work safety in mines), task No. 5 "Opracowanie zasad zatrudniania pracowników w warunkach zagrożenia klimatycznego w podziemnych zakładach górniczych" (Development of rules for employing workers in climatic hazard conditions in underground mining plants) SP/K/5/143275/11, PBS-1/RG-6/2011.

## References

- Bottomley P., Von Glehn F., Matthews, M., 1987. *Predicting and Reducing Stope Heat Flow in South African Gold Mines*. Proceedings of the 3rd Mine Ventilation Symposium, October 12-14, 1987, The Pennsylvania State University, University Park, Pennsylvania.
- Brake R., Bates G., 2002. *A Valid Method for Comparing Rational and Empirical Heat Stress Indices*. Ann. Occup. Hyg., **46**, 2, 164-174.
- Drenda J. et al., 2014a. *Raport końcowy – Poprawa bezpieczeństwa pracy w kopalniach, zadanie nr 5 – Opracowanie zasad zatrudniania pracowników w warunkach zagrożenia klimatycznego w podziemnych zakładach górniczych* – unpublished work.
- Drenda J., Sułkowski J., Słota Z., Domagała L., Musioł D., Róžański Z., Pach G., Wrona P., Słota K., Morcinek-Słota A., Grodzicka A., 2014b. *Kryteria bezpiecznej pracy górników w gorących stanowiskach pracy w kopalniach. Monografia: Poprawa bezpieczeństwa pracy w kopalniach, teoria i praktyka*. Chapter: 5.1, Wydawnictwo Politechniki Śląskiej, Gliwice XI. 2014, p. 153-171.
- Drenda J., 1993. *Dyskomfort cieplny w środowiskach pracy kopalń głębokich*. Zeszyty Naukowe, Politechnika Śląska, z. 213/1993, Wydawnictwo Politechniki Śląskiej.
- Drenda J., 2012. *Ocena klimatycznych warunków pracy górników w polskich kopalniach węgla kamiennego i rudy miedzi*. Górnictwo i Geologia, Tome 7, Volume 3, Wydawnictwo Politechniki Śląskiej, 2012.
- Frycz A., 1981. *Klimatyzacja kopalń*. Wydawnictwo Śląsk, Katowice.
- Knechtel J., 2001. *Wpływ temperatury pierwotnej skał na stan zagrożenia klimatycznego w wyrobiskach górniczych kopalń węgla*. Główny Instytut Górnictwa, Ustroń 2001.
- Mc Phearson M.J., 1993. *Subsurface Ventilation and Environmental Engineering*. Springer, Netherlands, 1993.
- Mitchel D., Whillier A., 1971. *Cooling Power of Underground Environments*. Journal of The South African Institute of Mining and Metallurgy, October, p. 93-99.

- Ordinance, 2002. Rozporządzenie Ministra Gospodarki z 28.06.2002 w sprawie bezpieczeństwa i higieny pracy, prowadzenia ruchu i specjalistycznego zabezpieczenia przeciwpożarowego w podziemnych zakładach górniczych (Dz. U. Nr 139, poz. 1169, z 2006 r. Nr 124, poz. 863 oraz z 2010 r. Nr 126, poz. 855).
- Ordinance, 2013. Rozporządzenie Ministra Środowiska z dnia 29 stycznia 2013 r. w sprawie zagrożeń naturalnych w zakładach górniczych (Dz.U. 2013 poz. 230).
- PN-G-03100, 1997. *Warunki klimatyczne kopalń podziemnych. Wyznaczenie temperatury zastępczej klimatu.*
- Ramsden R., Von Glehn F., 2012. *Guidelines for selecting equipment in cooling systems*, Proceedings of 14th U.S/North American Mine Ventilation Symposium, June 17-20, University of Utah, USA.
- Strumiński A., Turkiewicz W., 2003. *Warunki klimatyczne w oddziałach eksploatacyjnych kopalń rud miedzi przy występowaniu zagrożeń skojarzonych*. Cuprum: Czasopismo Naukowo-Techniczne Górnictwa Rud, 3, 109-128.
- Wacławik J., Cygankiewicz J., Knechtel J., 1995. *Warunki klimatyczne w głębokich kopalniach*. Wydawnictwo CPPOG-SMiE, PAN, Kraków, 1995.
- Wacławik J., 2009. *Ocena obciążenia cieplnego pracownika w mikroklimacie gorącym*. V Szkoła Aerologii Górniczej, Wrocław 145-158.
- Wacławik J., Knechtel J., Świerczek L., 2013. *Analiza porównawcza wybranych wskaźników oceny mikroklimatu w gorących miejscach pracy kopalń węgla kamiennego*. Górnictwo i Geologia, 4, 8, 171-181.
- Yang W., Inoue M., 2012. *Factors that Influence On a Mine Climate Simulation*. Proceedings of 14th U.S/North American Mine Ventilation Symposium, June 17-20, University of Utah, USA.