

Aging of ground Global Navigation Satellite System oscillators

Indexed by:



Kamil Maciuk^a

AGH University of Science and Technology, Department of Integrated Geodesy and Cartography, Mickiewicza 30, 30-059, Kraków, Poland

Highlights


- A comprehensive analysis of global navigation satellite system clocks is presented.
- First research on the effect of aging on ground clocks was described and discussed.
- Changes in clock stability over time are proven.
- There are no specific changes for the type of oscillator (internal, rubidium, caesium, hydrogen maser).

Abstract

Global Navigation Satellite System (GNSS) are widely used in many areas of human life and activity. The proper functioning of GNSS systems depends on several factors, the most important of which is the correct knowledge of time. The position indirectly is based on the knowledge of the distance, which is determined based on time with the knowledge of the speed of the electromagnetic wave. Thus, proper (accurate) knowledge of time (GNSS clock stability) is a key to precise positioning. In this text, the long-term stability of the GNSS station clocks covering the years 1994-2020 was analysed. For this purpose, the corrections of the clocks at selected permanent stations were used, and their stability was determined for all years separately. Then the change of clock stability over time and the search for correlation were analysed. As the results showed, there are clearly differences between four of the type of oscillators analysed. In case of the comparison on an annual basis, no change over time was found.

Keywords

clock, GNSS, oscillator, positioning, time.

This is an open access article under the CC BY license (<https://creativecommons.org/licenses/by/4.0/>) 

1. Introduction

GNSS (Global Navigation Satellite System) clocks are the core of navigation and positioning, where it is very important to ensure continuous and reliable operation in a wide range of applications, e.g. autonomous vehicles [8], dynamic displacements [26] or real-time positioning [25] and many others [12]. As research shows it has a main impact on the inaccuracy of results if clock are modelled incorrectly [5, 7, 13, 17]. Each GNSS satellite is equipped with a precise atomic oscillator (clock), usually a rubidium (Rb) or hydrogen maser (H-maser), and it is rarely a caesium (Cs) clock [9]. The ground clock is usually an internal quartz oscillator or a higher precise external clock (Cs, Rb, H-maser) [23]. Precise knowledge of time is very important in various engineering fields [19, 27]. The carrier phase measurement are used in the most accurate applications, it is described by observation equations and contains receiver and clock biases [21, 28]:

$$\lambda_l \varphi_m^j(t) = \rho_m^j(t) + c \cdot \delta t_m(t) - c \cdot \delta t^j(t - \tau_m^j) + T_m^j(t) - I_m^j(t) - \lambda_l N_m^j(t) + \lambda_l \varphi_m^j(0) + dM_m^j - dR_m^j + \varepsilon_m^j \quad (1)$$

$$\rho_m^j(t) = \left\| \left(\vec{r}^j(t - \tau_m^j) + d\vec{r}^j(t - \tau_m^j) \right) - \left(\vec{r}_m(t) + d\vec{r}_m(t) \right) \right\| \quad (2)$$

where m denotes the receiver, j the satellite, t the epoch time, c the speed of light in a vacuum, λ_l the wavelength of the carrier phase, φ_m^j the carrier phase observation, δt_m and δt^j the receiver clock and satellite clock biases, T_m^j the tropospheric delay, I_m^j the ionospheric delay, N_m^j the integer ambiguity, $\varphi_m^j(0)$ the initial fraction of carrier phase, dM the multipath effect on the carrier phase, dR the relativistic effect error, ε_m^j the noise of carrier phase measurement, and ρ_m^j the geometric distance between satellite position (x^s, y^s, z^s) at the signal emission time and GPS receiver position (x, y, z) at the signal arrival time.

In GNSS positioning correct and precise time allows for the determination of the objects with the appropriate accuracy and quality, and also enables the use of GNSS systems in all areas of satellite positioning, e.g., train monitoring, 3D models, or time series analysis. In a similar regard regarding GNSS clock analysis, ground clock is often a stable reference [20], and in case of the external clock performance are better than the space clock [2]. The ground GNSS clock was not an object of the wide spectrum of the research. Usually, the object of research is satellite clocks, due to the fact that errors in reference stations are eliminated in the first place when differentiating observations or constitute one of the unknowns in observations processing [29]. There are only a few positions regarding the issue analysed in this text [22]. Ground clocks are the core of absolute positioning, while in

E-mail addresses: K. Maciuk (ORCID: 0000-0001-5514-8510); maciuk@agh.edu.pl

differential positioning they are eliminated [15, 31] and in a real-time positioning [3]. In the PPP (Precise Point Positioning) usage of clocks corrections and other precise products allows for determination user's position with cm accuracy [30]. Each clock is characterised by a noise type, and similar analyses are also used for the coordinate time-series analysis [16]. Research shows a mainly random phase walk and due to white frequency noise that affects the stability of space clocks [4]. However, regarding the analysed period and clock types, other noises such as flick or random frequency walk are expected [24].

In this paper, the author makes an analysis of the type and time of the ground GNSS clock operation mounted in the permanent reference stations. For a stability clock analysis, Allan (and related) variations are used [6]. Among four different the less stable were internal oscillators because of a weakest frequency standard, usually quartz. This is first such complex analysis allows also for determination stability and reliability of the GNSS clocks, similar analysis were conducted already, but only for general characteristics [10], evolution of clock quality [11] or in real-time precise positioning [14]. The results of the comparison of the next three clock types are comparable, but – what to expect – the most accurate were external H-maser. An analysis of the changes on an annual basis of the same clock showed no changes with the passage of time.

2. Methods

Based on commonly available IGS (International GNSS Service) clock corrections, annual correction files of IGS reference station clocks were created with an interval of 5 minutes, leading to more than 100,000 records per year. Figure 1 shows a current distribution of the IGS network stations; only part of them have a clock correction published, due to their status in the IGS. For a determination of the oscillator types of the stations, its changes and the date of the inclusion station logs were analyzed.

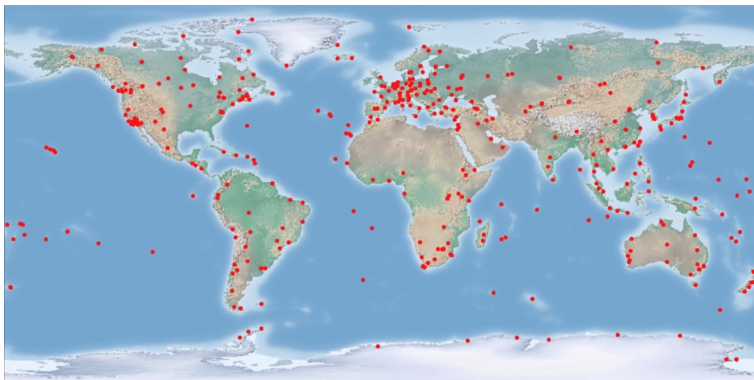


Fig. 1. IGS stations (<https://www.igs.org/station-resources>)

Since the 1980s until the end of 2020, more than 500 stations have been included in the IGS. Based on the information about frequency standards from the logs, there were more than 1,195 records for such a network, which leads to a ~2.5 changes of the oscillator type for each permanent station during its lifetime. The types of oscillators are divided almost in half: 610 external ones, 585 internal ones, and 22 of them unknown (log is not properly filled by the moderator, Table 1). Among external clocks, the majority of them are H-maser (315 external clocks), caesium (140), and rubidium (130), 22 do not have a detailed description of the external clock type (No record).

Table 1. Statistics of the standard type number and mean lifespan in the IGS network

	Standard-type	Number of clocks	Mean lifespan
External	Quartz	3	5,1
	Caesium	140	5,4
	H-maser	315	4,6
	Rubidium	130	4,4
	There are no records.	22	5,2
	Internal	585	9,7
	Σ	1 195	7,2

Among all the stations analysed, Table 2 shows the top 10 with the longest uninterrupted operations of a single oscillator and the top 10 stations with the longest permanent periods on a single oscillator. The majority of the are internal, due to the simplest way of the mountain and low cost. The longest period is more than 30 years (PIN1 station, Pinyon Flats, USA).

Since beginning of IGS a several hundred stations belonged or belongs to an IGS till now. Therefore, a criterion related to the selective choice of several stations to present in this paper was made. Criterion was based on the selection of the 3 oscillators with the longest uninterrupted operation of each of the 4 types (Table 1) and the available clock products (Table 3). According to the standard types in the IGS network, 12 representative clocks were selected for detailed analyses, which will be further analysed.

Figure 2 shows a raw clock product of the sample of each oscillator type. In these graphs, a different kind of correction changes is clearly seen. Moreover, each graph has a different y-axis scale, thus in addition to the trends, magnitudes also differ.

The first part of the processing was the removal of outliers and gaps from a raw observation. For this purpose, an MAD (median absolute deviation) was calculated and a criterion of 5 MAD was adopted [1]. Figure 3 shows raw (left) and cleaned (right) data for the IRTK station.

Table 2. Top 10 stations with the longest uninterrupted operating single oscillators

#	Station	Clock	Clock-type	From	To	Days	Years
1	PIN1	Internal		09.01.1990	24.11.2020	11 277	30,9
2	JPLM	External	Rubidium	20.03.1990	30.11.2018	10 482	28,7
3	VNDP	Internal		25.05.1992	24.11.2020	10 410	28,5
4	INEG	Internal		19.02.1993	24.11.2020	10 140	27,8
5	ONSA	External	H-Maser	01.07.1991	02.04.2019	10 137	27,8
6	NLIB	External	H-Maser	05.03.1993	24.11.2020	10 126	27,7
7	BRMU	Internal		12.03.1993	24.11.2020	10 119	27,7
8	ZIMM	Internal		01.05.1993	24.11.2020	10 069	27,6
9	MAW1	Internal		01.01.1994	24.11.2020	9 824	26,9
10	BLYT	Internal		13.01.1994	24.11.2020	9 812	26,9

Table 3. Statistics of the standard type number and mean lifespan in the IGS network

#	Station	City	Country	Clock	Clock-type	From	To	Days	Years
1	JPLM	Pasadena	USA	External	Rubidium	20.03.1990	30.11.2018	10 482	28,7
2	ONSA	Onsala	Sweden	External	H-Maser	01.07.1991	02.04.2019	10 137	27,8
3	NLIB	North Liberty	USA	External	H-Maser	05.03.1993	24.11.2020	10 126	27,7
4	BRMU	Town of St. George	UK	Internal		12.03.1993	24.11.2020	10 119	27,7
5	ZIMM	Zimmerwald	Switzerland	Internal		01.05.1993	24.11.2020	10 069	27,6
6	MAW1	Mawson	Antarctica	Internal		01.01.1994	24.11.2020	9 824	26,9
7	IRKT	Irkutsk	Russia	External	H-Maser	16.09.1995	24.11.2020	9 201	25,2
8	SUWN	Suwon-shi	South Korea	External	Rubidium	03.02.1998	24.11.2020	8 330	22,8
9	KIRU	Kiruna	Sweden	External	Caesium	08.07.1993	19.02.2013	7 166	19,6
10	VILL	Villafranca	Spain	External	Caesium	12.11.1994	27.12.2012	6 620	18,1
11	TSKB	Tsukuba	Japan	External	Caesium	15.12.1993	14.09.2011	6 482	17,7
12	JOZE	Jozefoslaw	Poland	External	Rubidium	10.11.1994	30.06.2005	3 885	10,6

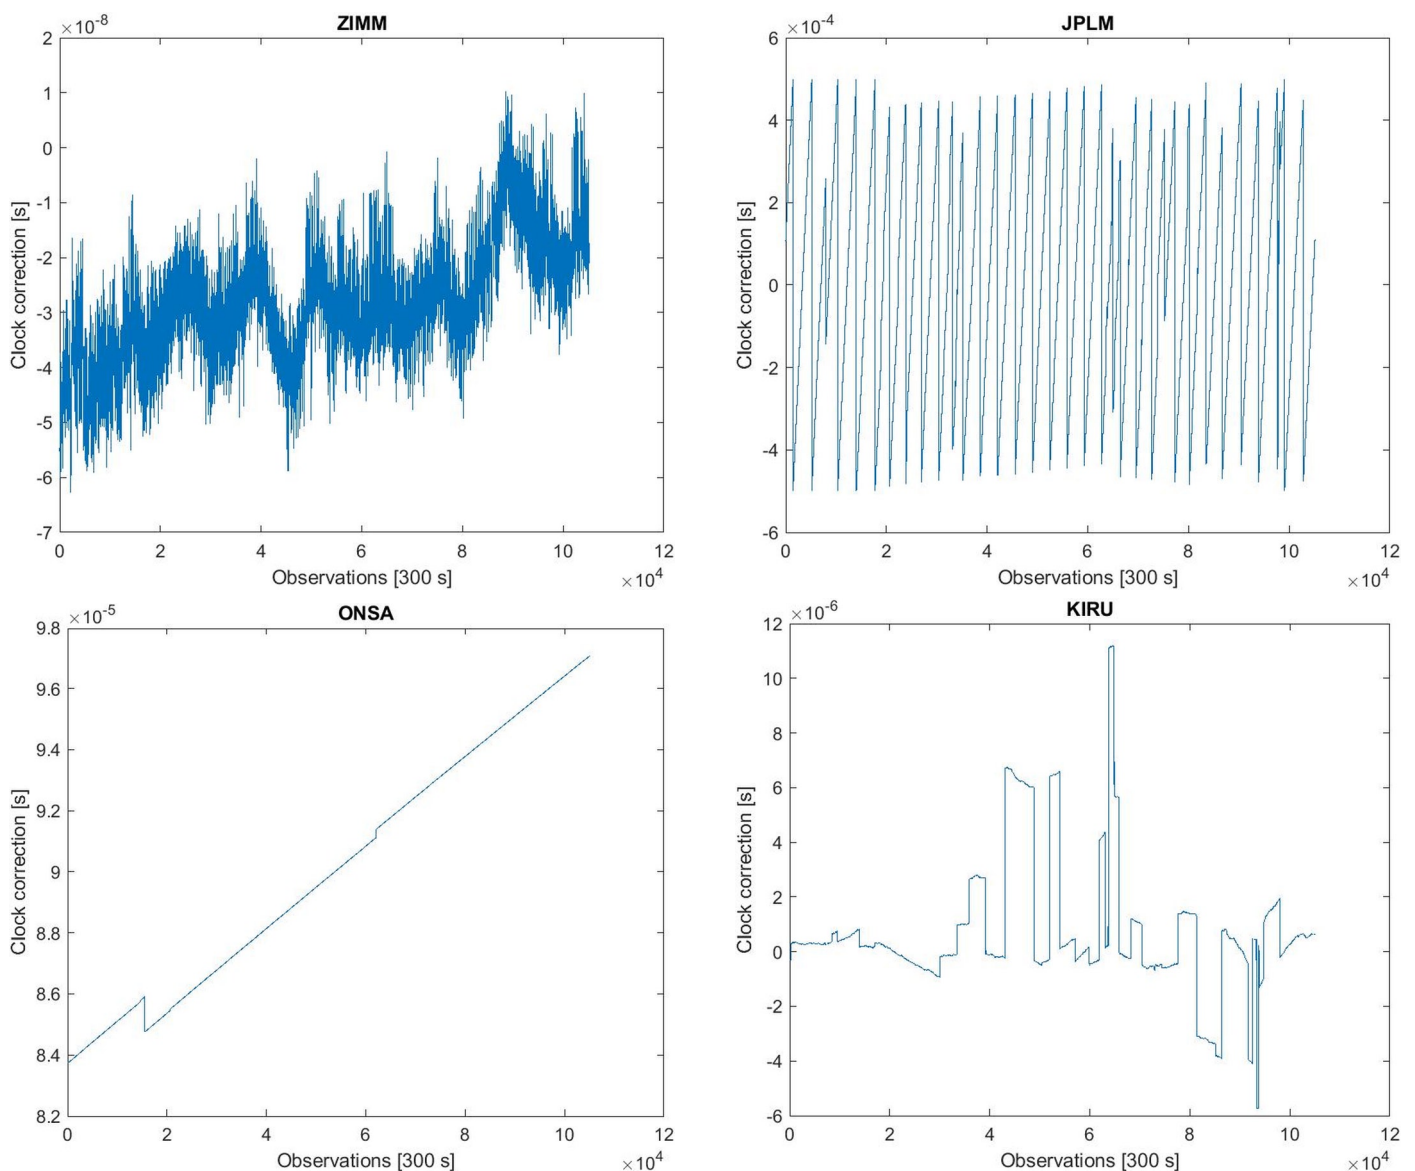


Fig. 2. Raw clock corrections for 2015 of 4 different types of oscillators: ZIMM (internal), JPLM (rubidium), KIRU (caesium), and ONSA (H-maser) for each available period

For the calculation, daily clock files for each clock mentioned in Table 3 were divided into years, for a simplification, only years with at least 80% of the cover (at least 292 days/year). For the possible

identification of change in time in HDEV (Hadamard deviation) and frequency drift (aging) in yearly periods were calculated. Such as-

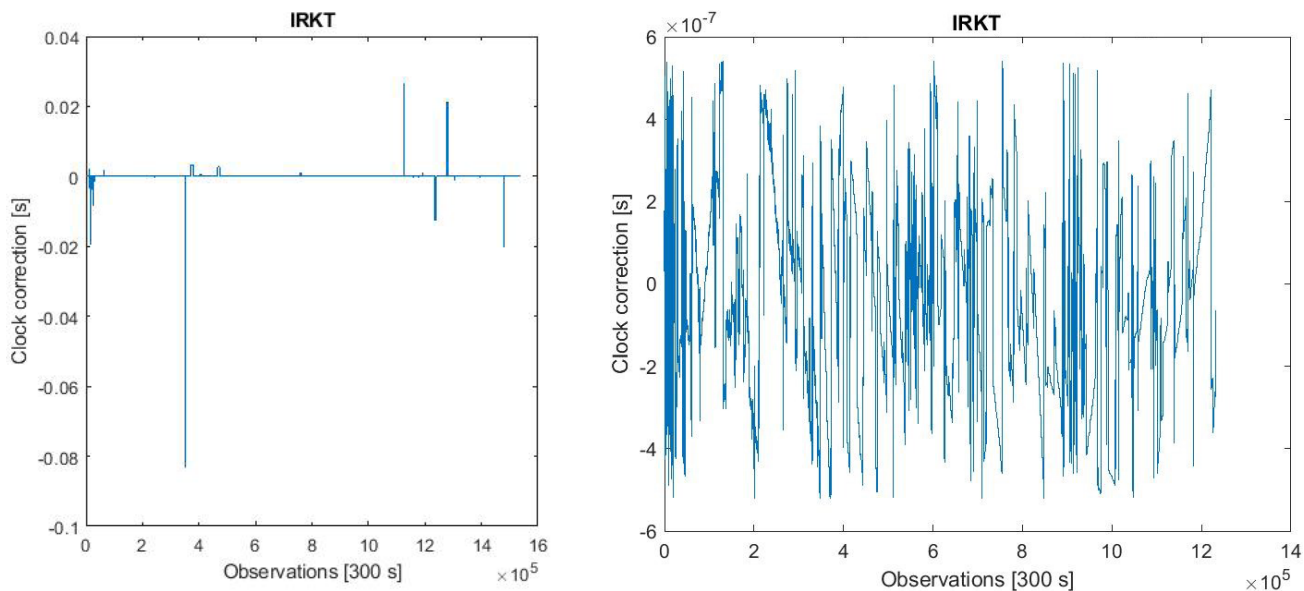


Fig. 3. Clock corrections of the IRKT station for the 1994-2005 period: raw (left) and with removed outliers (right)

sumption allows to reject frequency drift, and handles divergent noise, compared to the standard or other Allan variation (and related) [18].

3. Results

Based on the calculation, Figure 4 shows an HDEV for each year and each clock shown in Table 3. For the best possible interpretation, the X- and Y-axis scales are the same for each. The first row shows 3

internal oscillators, the second - rubidium ones, the third - caesium, and the fourth h-maser ones. When comparing results in a row, there is a small repeatability of the clocks in a type. For example, for the BRMU station, there is clearly no dependence between each analysed year. While for a MAW1 clock, there is high compatibility and repeatability of the results obtained comparing years among each other. These situations appear in the case of the rubidium and caesium clocks. For h-maser clocks, these results are more comparable to each other and compared year-to-year (IRKT & NLIB). The greatest consistency

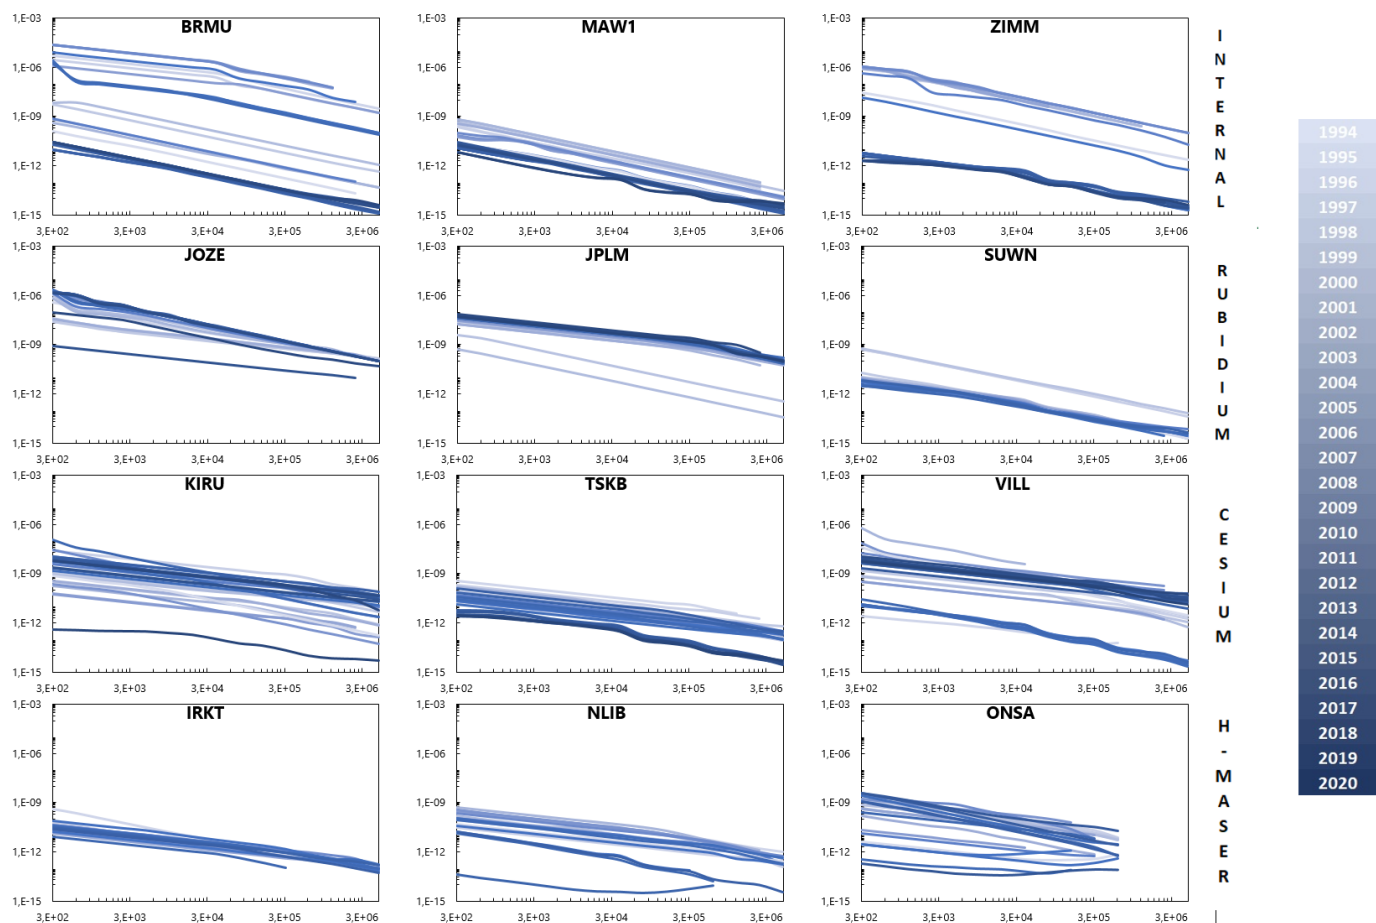


Fig. 4. Comparison of the year-to-year ground clocks stabilities for period 1994 (light blue) to 2020 (dark navy). Each Y-axis - ADEV [s], each X-axis - averaging time τ [s]; 1st row - internal oscillators, 2nd - rubidium, 3rd - caesium and 4th - H-Maser

of the results comparing individual years occurred at stations MAW1 (internal), SUWN (rubidium), and IRKT (h-maser). On the contrary, a comparative analysis of individual years among themselves for one station did not show significant changes. Only for 2 stations with an embedded clock (MAW1 and ZIMM) is a clear increase in stability over time evident. At the station ZIMM clocks for 1994-2008 years are at 1e-6 s to 1e-11 s stability. For years 2009-2020 at 1e-11 to 1e-15 s. Similar for a MAW1 station.

4. Conclusions

GNSS clocks are crucial in navigation and positioning. Thus, its continuous, uninterrupted, and stable operation is the basis for satellite navigation systems. In this paper, the author wanted to provide a brief analysis of the change in the stability of the GNSS reference station clocks over time. For this purpose, all reference stations available in the clock files since the beginning of the IGS network were

analyzed. The results obtained were divided into 4 types of clocks that are available. Then, 3 randomly selected reference clocks were selected from this set for each of the 4 clock types (embedded, rubidium, cesium, and hydrogen masers) that were selected from this set. The results showed that there are no clock-type-specific variations in timing; the variations are stochastic in nature. Furthermore, only an increase in stability on 2 of the 3 embedded clocks analyzed was correlated with a change in time. The other 3 types of external clocks are stable over time and show no change.

Acknowledgments

This work was funded by the Initiative for Excellence Research University grant from AGH University of Science and Technology, by research subvention no. 16.16.150.545 and by National Science Centre as part of Miniatura 5, application No. 2021/05/X/ST10/00058.

References

1. Ai Q, Yuan Y, Xu T, Zhang B. Time and frequency characterization of GLONASS and Galileo on-board clocks. *Measurement Science and Technology* 2020; 31(6): 065003, <https://doi.org/10.1088/1361-6501/ab69d3>.
2. Delporte J, Boulanger C, Mercier F. Short-term stability of GNSS on-board clocks using the polynomial method. *2012 European Frequency and Time Forum, IEEE: 2012*; 117-121, <https://doi.org/10.1109/EFTF.2012.6502347>.
3. El-Mowafy A. Impact of predicting real-time clock corrections during their outages on precise point positioning. *Survey Review* 2019; 51(365): 183-192, <https://doi.org/10.1080/00396265.2017.1405155>.
4. Formichella V. The J2 Relativistic Periodic Component of GNSS Satellite Clocks. *IFCS 2018 - IEEE International Frequency Control Symposium 2018*; (1): 1-7, <https://doi.org/10.1109/IFCS.2018.8597502>.
5. Ge M, Chen J, Douša J et al. A computationally efficient approach for estimating high-rate satellite clock corrections in realtime. *GPS Solutions* 2012; 16(1): 9-17, <https://doi.org/10.1007/s10291-011-0206-z>.
6. Guo F, Li X, Zhang X, Wang J. The contribution of Multi-GNSS Experiment (MGEX) to precise point positioning. *Advances in Space Research* 2017; 59(11): 2714-2725, <https://doi.org/10.1016/j.asr.2016.05.018>.
7. Guo F, Zhang X, Li X, Cai S. Impact of sampling rate of IGS satellite clock on precise point positioning. *Geo-spatial Information Science* 2010; 13(2): 150-156, <https://doi.org/10.1007/s11806-010-0226-9>.
8. He L, Li G, Xing L, Chen Y. An autonomous multi-sensor satellite system based on multi-agent blackboard model. *Eksploatacja i Niezawodność - Maintenance and Reliability* 2017; 19(3): 447-458, <https://doi.org/10.17531/ein.2017.3.16>.
9. Huang G, Cui B, Xu Y, Zhang Q. Characteristics and performance evaluation of Galileo on-orbit satellites atomic clocks during 2014-2017. *Advances in Space Research* 2019; 63(9): 2899-2911, <https://doi.org/10.1016/j.asr.2018.01.034>.
10. Jaduszliwer B, Camparo J. Past, present and future of atomic clocks for GNSS. *GPS Solutions* 2021; 25(1): 1-13, <https://doi.org/10.1007/s10291-020-01059-x>.
11. Kazmierski K, Zajdel R, Sońnica K. Evolution of orbit and clock quality for real-time multi-GNSS solutions. *GPS Solutions* 2020; 24(4): 1-12, <https://doi.org/10.1007/s10291-020-01026-6>.
12. Krasuski K, Bakula M. Operation and reliability of an onboard GNSS receiver during an in-flight test. *Scientific Journal of Silesian University of Technology. Series Transport* 2021; 111(35): 75-88, <https://doi.org/10.20858/sjsutst.2021.111.6>.
13. Li H, Zhou X, Wu B, Wang J. Estimation of the inter-frequency clock bias for the satellites of PRN25 and PRN01. *Science China Physics, Mechanics and Astronomy* 2012; 55(11): 2186-2193, <https://doi.org/10.1007/s11433-012-4897-0>.
14. Li X, Ge M, Dai X et al. Accuracy and reliability of multi-GNSS real-time precise positioning: GPS, GLONASS, BeiDou, and Galileo. *Journal of Geodesy* 2015; 89(6): 607-635, <https://doi.org/10.1007/s00190-015-0802-8>.
15. Nistor S. The impact of tropospheric mapping function on PPP determination for one-month period. *Acta Geodynamica et Geomaterialia* 2020; 17(2): 237-252, <https://doi.org/10.13168/AGG.2020.0018>.
16. Nistor S. The influence of different types of noise on the velocity uncertainties in GPS time series analysis. *Acta Geodynamica et Geomaterialia* 2016; 13(4): 387-394, <https://doi.org/10.13168/AGG.2016.0021>.
17. Qin W, Ge Y, Wei P et al. Assessment of the BDS-3 on-board clocks and their impact on the PPP time transfer performance. *Measurement* 2020; 153: 107356, <https://doi.org/10.1016/j.measurement.2019.107356>.
18. Riley W J. *Handbook of Frequency Stability Analysis*. 2008, [https://doi.org/10.1016/0148-9062\(94\)92706-5](https://doi.org/10.1016/0148-9062(94)92706-5).
19. Sobaszek Ł, Gola A, Świć A. Time-based machine failure prediction in multi-machine manufacturing systems. *Eksploatacja i Niezawodność - Maintenance and Reliability* 2019; 22(1): 52-62, <https://doi.org/10.17531/ein.2020.1.7>.
20. Steigenberger P, Montenbruck O. Galileo status: orbits, clocks, and positioning. *GPS Solutions* 2017; 21(2): 319-331, <https://doi.org/10.1007/s10291-016-0566-5>.
21. Teunissen P J G, Kleusberg A. *GPS observation equations and positioning concepts*. GPS for Geodesy, Berlin, Heidelberg, Springer Berlin Heidelberg: : 175-217, <https://doi.org/10.1007/BFb0117682>.
22. Wang K, Rothacher M. Stochastic modeling of high-stability ground clocks in GPS analysis. *Journal of Geodesy* 2013; 87(5): 427-437, <https://doi.org/10.1007/s00190-013-0616-5>.
23. Wu Z, Zhou S, Hu X et al. Performance of the BDS3 experimental satellite passive hydrogen maser. *GPS Solutions* 2018; 22(2): 1-13, <https://doi.org/10.1007/s10291-018-0706-1>.
24. Yang L, Wang G, Huérano V et al. GPS geodetic infrastructure for natural hazards study in the Puerto Rico and Virgin Islands region. *Natural Hazards* 2016; 83(1): 641-665, <https://doi.org/10.1007/s11069-016-2344-7>.

25. Yao Y, He Y, Yi W et al. Method for evaluating real-time GNSS satellite clock offset products. *GPS Solutions* 2017; 21(4): 1417-1425, <https://doi.org/10.1007/s10291-017-0619-4>.
26. Yigit C O, El-Mowafy A, Bezcioglu M, Dindar A A. Investigating the effects of ultra-rapid, rapid vs. Final precise orbit and clock products on high-rate GNSS-PPP for capturing dynamic displacements. *Structural Engineering and Mechanics* 2020; 73(4): 424-436.
27. Yuan J, Zhou S, Hu X et al. Impact of Attitude Model, Phase Wind-Up and Phase Center Variation on Precise Orbit and Clock Offset Determination of GRACE-FO and CentiSpace-1. *Remote Sensing* 2021; 13(13): 2636, <https://doi.org/10.3390/rs13132636>.
28. Zhang X, Guo B, Guo F, Du C. Influence of clock jump on the velocity and acceleration estimation with a single GPS receiver based on carrier-phase-derived Doppler. *GPS Solutions* 2013; 17(4): 549-559, <https://doi.org/10.1007/s10291-012-0300-x>.
29. Zhang X, He X, Liu W. Characteristics of systematic errors in the BDS Hatch-Melbourne-Wübbena combination and its influence on wide-lane ambiguity resolution. *GPS Solutions* 2017; 21(1): 265-277, <https://doi.org/10.1007/s10291-016-0520-6>.
30. Zhao L, Blunt P, Yang L. Performance Analysis of Zero-Difference GPS L1/L2/L5 and Galileo E1/E5a/E5b/E6 Point Positioning Using CNES Uncombined Bias Products. *Remote Sensing* 2022; 14(3): 1-17, <https://doi.org/10.3390/rs14030650>.
31. Ziętala M. Stability of GPS and GLONASS onboard clocks on a monthly basis. *Scientific Journal of Silesian University of Technology. Series Transport* 2022; 114(27): 193-209, <https://doi.org/10.20858/sjsutst.2022.114.16>.