


This article was downloaded by: [185.55.64.226]

On: 15 March 2015, At: 01:28

Publisher: Taylor & Francis

Informa Ltd Registered in England and Wales Registered Number: 1072954 Registered office: Mortimer House, 37-41 Mortimer Street, London W1T 3JH, UK

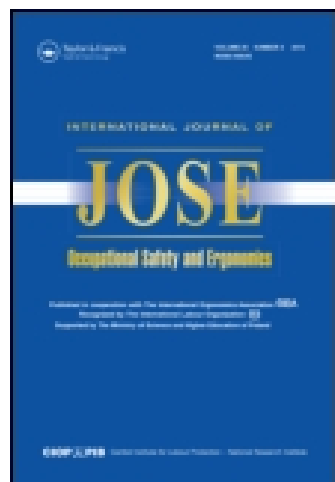

International Journal of Occupational Safety and Ergonomics

Publication details, including instructions for authors and subscription information:

<http://www.tandfonline.com/loi/tose20>

Cardiovascular Strain of Sawmill Workers in South-Western Nigeria

Salami Olasunkanmi Ismaila^a, Kolawole Taofik Oriolowo^b & Olusegun Gabriel Akanbi^b

^a Department of Mechanical Engineering, Federal University of Abeokuta, Abeokuta, Ogun State, Nigeria

^b Department of Industrial ... Production Engineering, University of Ibadan, Abeokuta, Oyo State, Nigeria

Published online: 08 Jan 2015.

To cite this article: Salami Olasunkanmi Ismaila, Kolawole Taofik Oriolowo & Olusegun Gabriel Akanbi (2013) Cardiovascular Strain of Sawmill Workers in South-Western Nigeria, *International Journal of Occupational Safety and Ergonomics*, 19:4, 607-611

To link to this article: <http://dx.doi.org/10.1080/10803548.2013.11077016>

PLEASE SCROLL DOWN FOR ARTICLE

Taylor & Francis makes every effort to ensure the accuracy of all the information (the "Content") contained in the publications on our platform. However, Taylor & Francis, our agents, and our licensors make no representations or warranties whatsoever as to the accuracy, completeness, or suitability for any purpose of the Content. Any opinions and views expressed in this publication are the opinions and views of the authors, and are not the views of or endorsed by Taylor & Francis. The accuracy of the Content should not be relied upon and should be independently verified with primary sources of information. Taylor and Francis shall not be liable for any losses, actions, claims, proceedings, demands, costs, expenses, damages, and other liabilities whatsoever or howsoever caused arising directly or indirectly in connection with, in relation to or arising out of the use of the Content.

This article may be used for research, teaching, and private study purposes. Any substantial or systematic reproduction, redistribution, reselling, loan, sub-licensing, systematic supply, or distribution in any form to anyone is expressly forbidden. Terms & Conditions of access and use can be found at <http://www.tandfonline.com/page/terms-and-conditions>

Cardiovascular Strain of Sawmill Workers in South-Western Nigeria

Salami Olasunkanmi Ismaila

Department of Mechanical Engineering, Federal University of Abeokuta, Abeokuta, Ogun State, Nigeria

**Kolawole Taofik Oriolowo
Olusegun Gabriel Akanbi**

Department of Industrial & Production Engineering, University of Ibadan, Ibadan, Oyo State, Nigeria

This study aimed to assess cardiovascular strain during sawmilling operations in terms of physical workload, based on heart rate changes. We measured resting and working heart rates and calculated cardiovascular load (%CVL), cardiovascular strain (%CVS) and relative heart rate (%RHR) in 35 sawmill workers. Based on heart rate only, the work in sawmills was classified as very heavy and extremely heavy. Similarly, a high-level category was recorded for %CVL and a very high range for %CVS. Thus, the workload in sawmill operations is usually very high and can lead to physiological strain of the workers. There is a need to redesign the work content of this occupation to prevent excessive strain in the workers, as this will increase their productivity and reduce their health risk.

cardiovascular strain cardiovascular load workload energy expenditure sawmill worker

1. INTRODUCTION

According to data from the Workers Compensation Board of Alberta for 1997–2002, there was a high rate of musculoskeletal injuries in the sawmill industry of Alberta, Canada [1]. These injuries could result from incidents like being caught in or struck by machinery, falling from a height, heavy lifting or repetitive movements, twisting or reaching, and breathing in noxious or toxic chemicals while working to increase productivity [2]. In 2003, the Workers Compensation Board reviewed the claims in the sawmill industry in Alberta, which showed that musculoskeletal injuries accounted for 32% of total claims cost (~2 842 851 USD) and 38% of total time loss (~13 600 days), i.e., more than any other injury category. Similarly, a higher percentage of bodily injuries was observed in a study conducted in

Nigeria, which was attributed to lifting lumber, and lifting or lowering cut timber, boards and other heavy machine parts in awkward postures [2]. Simple forms of sawmilling operations have existed for hundreds of years, but in the past century there have been significant advances in sawmilling technology: introduction of electric-powered mills, improvements in saw designs and automation in sorting logs and other operations [3]. According to Uhumwangho, Njinaka, Edema, et al., some of these technologies are not available in developing countries, such as Nigeria, so manual processes are necessary [4].

Due to the high level of manual handling involved in sawmilling operations, the workers are exposed to higher levels of risk and high physical workload. Excessive physical workload and heat stress have been identified as factors that could result in sudden unexplained death syndrome [5].

In Nigeria, as in most developing countries, labour cost is low and most work is done manually, so physical demands of the task often exceed the physical capabilities of the worker [6]. For work to be compatible with the worker and to enhance productivity, factors like physical capability, good health, absence of accidents and task performance are required [7]. One third of industrial back injuries could be reduced by designing the job to fit the worker [8]. There is, therefore, a need to evaluate the physiological workload of sawmill workers in Nigeria.

The aim of this study was to assess cardiovascular strain during sawmilling operations in terms of physical workload, based on heart rate. Heart rate is commonly used to estimate energy expenditure or physical strain during sports, work or daily activities [9, 10, 11].

2. METHODS

2.1. Participants

A group of 35 men, with a median (*SD*) age of 36.3 (4.2) years and height of 1.64 (0.09) m, participated in the study. They worked in four different sawmills in Eruwa, Oyo State, Nigeria. All participants were engaged in operations that involved strenuous manual activities, such as moving planks, and transporting, loading and offloading logs.

2.2. Informed Consent of Participants

A few days before the study, the participants were given adequate information about it. Their consent was obtained before the start of the study.

2.3. Measurements Protocol

The participants' heart rate was measured during habitual sawmilling operations and as such was not expected to be affected by the research. The measurements were made with a stadiometer for body height (metres), a digital sphygmomanometer (Polygon YS796; Polygon Direct, China) for heart rate (beats per minute, bpm) and a weighing machine for body mass (kilograms). The participants were allowed to rest sufficiently

before starting the activity, to determine the resting heart rate (HR_{rest}) while they were lying on mattresses. The measurements were taken 3 times to ensure correctness; no changes were observed. The working heart rates (HR_{work}) were taken after the participants had worked continuously for 4 h at 30-min intervals. Heart rate was measured by holding the participant's left arm in front (with the palm facing up) and sliding the cuff onto the wrist, ensuring that the monitor was on the inside of the wrist, with the display in easy view. The cuff was comfortably wrapped around the wrist (with the top and bottom edges of the cuff tightened evenly around the wrist) and the power button was pressed. The participants were not allowed to talk or move during this period. The left elbow was held to ensure the participant did not move the hand during measurement. The reading was thereafter taken at ~1 min.

2.4. Determination of Physical Strain

Three ways of determining physical strain were used: relative cardiovascular load (%CVL), cardiovascular strain (%CVS) and relative heart rate (%RHR).

%CVL was evaluated on the basis of heart rate as follows [12, 13]:

$$\%CVL = 100\% \times [(HR_{work} - HR_{rest}) / HR_{max(8h)}], \quad (1)$$

where HR_{work} = mean heart rate in the job during various tasks, HR_{rest} = heart rate in a resting position, $HR_{max(8h)}$ = maximum acceptable heart rate for a work shift of 8 h, calculated as $1/3 \times (220 - \text{age}) + HR_{rest}$.

%CVL was used to evaluate cardiovascular load or aerobic strain: <30% = *acceptable level, no action required*; 30%–59% = *moderate level, peak loads should be reduced within a few weeks*; 60%–99% = *high level, peak loads should be reduced within a few months*; 100% = *intolerable high level, peak loads should be reduced immediately or work must be stopped*.

%CVS was calculated with Equation 2:

$$\%CVS = 100\% \times [(HR_{work} - HR_{rest}) / HR_{rest}], \quad (2)$$

where HR_{work} = mean working heart rate; HR_{rest} = resting heart rate.

Astrand and Rodahl’s categories of work intensity were used to classify %CVS: *light* ($HR_{work} < 90$); *moderate* ($90 \leq HR_{work} < 110$); *heavy* ($110 \leq HR_{work} < 130$), *very heavy* ($130 \leq HR_{work} < 150$) and *extremely heavy* ($150 \leq HR_{work} < 170$). Consequently, %CVS was classified as follows: 0%–50% = *acceptable, no action required*; 51%–80% = *moderate, action required within a few months*; 81%–120% = *high, action required within a few weeks*; 121%–150% = *very high, action required within a few days* and 151%–180% = *intolerable, action required immediately* [14].

%RHR, which is also an indicator of physical workload related to muscular activities [15, 16], was computed with Equation 3:

$$\%RHR = \frac{(HR_{work} - HR_{rest})}{(HR_{max} - HR_{rest})} \quad (3)$$

where HR_{work} = mean working heart rate; HR_{rest} = resting heart rate; HR_{max} = predicted maximum heart rate, calculated as $220 - \text{age}$ [14].

2.5. Statistical Analysis

Statistical analysis was conducted with SPSS version 16.0.

3. RESULTS

Table 1 shows the basic statistics of anthropometric data obtained in the study, i.e., range, standard deviation, 5th percentile, median and 95th

percentile. The participants’ median age was 37 years (range: 29–46), median body height was 1.6 m (range: 1.5–1.8). Their median body mass index (BMI) was 24.2 (range: 20.1–31.1). Normal BMI is 18.5–24.9, while 35.0–39.9 is regarded as moderately obese [17], so none of the workers were underweight or more than slightly obese.

The median resting heart rate (HR_{rest}) was 68 bpm, compared to the median work heart rate (HR_{work}) of 158 bpm. The median predicted maximum heart rate (HR_{max}) was 183 bpm, while the median maximum acceptable heart rate for an 8-h work shift ($HR_{max(8h)}$) was 129 bpm. Standard deviations were higher for $HR_{max(8h)}$ (6.9) and HR_{rest} (6.1) than for HR_{work} (4.6) and HR_{max} (4.2).

Table 2 presents values of %CVL, %CVS and %RHR. The median value of %CVL was 69%, while that of %CVS was 106.3%, with a wide range of 105.3%–182.0%. The median %RHR was 77.9%.

4. DISCUSSION

Sawmill activities include moving planks; transporting, loading and offloading logs; and stacking, which involves a lot of lifting and working in awkward postures. The hazardous nature of the work is probably the reason for having many young men at the sawmills. The age range in this study was 29–46 years, implying that those who participated in milling activities were those in active age, who can meet the demands of the job [2]. These people also have the highest strength

TABLE 1. Anthropometric Data of Nigerian Sawmill Workers (N = 35) and Their Heart Rates (in Beats per Minute, bpm) Measured at Rest (HR_{rest}) and During Work (HR_{work}), Predicted Maximum Heart Rate (HR_{max}), and Maximum Acceptable Heart Rate for an 8-h Work Shift ($HR_{max(8h)}$)

Statistic	Age (years)	Body Height (m)	Body Mass (kg)	BMI (kg/m^2)	HR_{rest} (bpm)	HR_{work} (bpm)	HR_{max} (bpm)	$HR_{max(8h)}$ (bpm)
Range	29–46	1.5–1.8	58–75	20.1–31.1	56–76	148–168	174–191	116–140
5th percentile	29.7	1.5	58.7	20.3	57	150	178	117
<i>Mdn</i>	37.0	1.6	66.0	24.2	68	158	183	129
95th percentile	42.2	1.8	72.3	29.7	75	165	190	138
<i>SD</i>	4.2	0.1	4.3	3.0	6.1	4.6	4.2	6.9

Notes. BMI = body mass index; HR_{max} = predicted maximum heart rate, calculated as $220 - \text{age}$ [14]; $HR_{max(8h)}$ = maximum acceptable heart rate for a work shift of 8 h, calculated as $1/3 \times (220 - \text{age}) + HR_{rest}$ [12, 13].

Downloaded by [185.55.64.226] at 01:28 15 March 2015

TABLE 2. Cardiovascular Load (%CVL), Cardiovascular Strain (%CVS) and Relative Heart Rate (%RHR) of Nigerian Sawmill Workers (N = 35)

Statistic	%CVL	%CVS	%RHR
Range	57.2–87.7	105.3–182.0	68.4–87.0
5th percentile	57.6	106.3	69.1
<i>Mdn</i>	69.0	130.4	77.9
95th percentile	85.5	173.8	84.0
<i>SD</i>	8.9	22.5	4.6

level [9]. Workers outside this age range were administrators, supervisors, drivers, or sawdust and shavings packers.

The median heart rate of 158 bpm, needed to do the work in sawmills, was over the recommended limit of 110 bpm for an 8-h work shift [18, 19]. The work in sawmills is between *very heavy* and *extremely heavy* according to Astrand and Rodahl's classification [14], since their working heart rates were 148–168 bpm. %CVL was between *moderate* and *high*, with a range of 57.2%–87.7%. However, on average the work belongs to the high-level category, with a median %CVL of 69%. According to Yoopat, Toicharoen, Glinsukon, et al., %CVL of 61%–100% represents high-level workload and action should be taken to reduce it as soon as possible [13]. Considering the median %CVS of 130.4%, on average the work belongs to the very high range, so action is required within a few days. Similarly, the median %RHR of 77.9% obtained in this study was higher than the 30% and 24.5% recommended by Shimaoka, Hiruta, Ono, et al. [20] and Wu and Wang [15], respectively. Similarly, according to Apud, Bostrand, Mobbs, et al., %RHR at work is an important indicator of physiological strain and should not exceed 40% for an 8-h period to avoid fatigue [21].

Thus, tasks can cause high cardiovascular strain during an 8-h workday and may cause fatigue and higher muscular strain in workers, with associated muscular pain. The workers had values over the recommended levels of cardiac strain indices; this shows that the activity caused high cardiovascular load on sawmillers during their work. The high cardiovascular load may be responsible for high percentage of bodily injuries recorded by Bello and Mijinyawa [2] and the high prevalence

of eye injury observed by Uhumwangho, et al. in the sawmill industry [4].

5. CONCLUSIONS

The work content of sawmill workers in this study was usually above normal and posed a health risk to the workers. Therefore, it is necessary to redesign the working system of sawmill workers, to reduce cardiovascular strain and increase productivity. Additionally, lifting and motorized positioning devices should be provided to reduce the stress and energy expenditure involved in carrying loads.

REFERENCES

1. Jones T, Kumar S. Occupational injuries and illnesses in the sawmill industry of Alberta. *Int J Ind Ergon.* 2004;33(5):415–27.
2. Bello SR, Mijinyawa Y. Assessment of injuries in small scale sawmill industry of south western Nigeria. *Agricultural Engineering International: CIGR Journal.* 2010;12(1):151–7. Retrieved July 23, 2013, from: <http://www.cigrjournal.org/index.php/Ejournal/article/viewFile/1558/1313>.
3. Demers P, Teschke K, editors. Lumber (Chapter 71). In: Stellman JM, editor. *Encyclopaedia of occupational health and safety.* 4th ed. Geneva, Switzerland: International Labour Organization; 1998. vol. III, p. 71.1–12.
4. Uhumwangho OM, Njinaka I, Edema OT, Dawodu OA, Omoti AE. Occupational eye injury among sawmill workers in Nigeria. *Asian Journal of Medical Sciences.* 2010;2(5):233–6. Retrieved July 23, 2013, from: <http://maxwellsci.com/print/ajms/v2-233-236.pdf>.

5. Gogh KT. Sudden unexplained death syndrome among Thai workers in Singapore [unpublished paper]. 1990.
6. Scott PA, Christie CJ. An indirect method to assess the energy expenditure of manual labourers in situ. *S Afr J Sci.* 2004;100(11–12):694–8. Retrieved July 23, 2013, from: http://eprints.ru.ac.za/138/1/sajsci_v100_n11_a36%5B1%5D.pdf.
7. Sluiter JK, Frings-Dresen MH. What do we know about ageing at work? Evidence based fitness for duty and health in fire fighters. *Ergonomics.* 2007;50(11):1897–913.
8. Snook SH. The design of manual handling tasks. *Ergonomics.* 1978;21(12):963–85.
9. McArdle WD, Katch FI, Katch VL. Exercise physiology: energy, nutrition and human performance. 5th ed. Baltimore, MD, USA: Lippincott Williams and Wilkins; 2001.
10. Bot SD, Hollander AP. The relationship between heart rate and oxygen uptake during non-steady state exercise. *Ergonomics.* 2000;43(10):1578–92.
11. Haskell WL, Yee MC, Evans A, Irby PJ. Simultaneous measurement of heart rate and body motion to quantitate physical activity. *Med Sci Sports Exerc.* 1993; 25(1):109–15.
12. Intaranont K, Vanwonderghem K. Study of the exposure limits in constraining climatic conditions for strenuous tasks: an ergonomic approach [unpublished manuscript]. 1993.
13. Yoopat P, Toicharoen P, Glinsukon T, Vanwonderghem K, Louhevaara V. Ergonomics in practice: physical workload and heat stress in Thailand. *International Journal of Occupational Safety and Ergonomics (JOSE).* 2002;8(1):83–3. Retrieved July 23, 2013, from: <http://www.ciop.pl/792>.
14. Astrand PO, Rodahl K. Textbook of work physiology: physiological bases of exercise. 3rd ed. New York, NY, USA: McGraw-Hill; 1986.
15. Wu HC, Wang MJ. Relationship between maximum acceptable work time and physical workload. *Ergonomics.* 2002; 45(4):280–89.
16. Kirk MP, Sullman MJM. Heart rate strain in cable hauler choker setters in New Zealand logging operations. *Appl Ergon.* 2001;32(4):389–98.
17. Singh D, Park W, Levy MS. Obesity does not reduce maximum acceptable weights of lift. *Appl Ergon.* 2009;40(1):1–7.
18. Sanders MS, McCormick EJ. Human factors in engineering and design. 7th ed. New York, NY, USA: McGraw-Hill; 1993.
19. Saha PN, Datta SR, Banerjee PK, Narayane GG. An acceptable workload for Indian workers. *Ergonomics.* 1979;22(9): 1059–71.
20. Shimaoka M, Hiruta S, Ono Y, Nonaka H, Hjelm EW, Hagberg M. A comparative study of physical work load in Japanese and Swedish nursery school teachers. *Eur J Appl Physiol.* 1998;77(1–2):10–8.
21. Apud E, Bostrand L, Mobbs ID, Strehlke B. Guidelines on ergonomic study in forestry. Geneva, Switzerland: International Labour Organization; 1989.