

## Heat Release in a Direct Fuel Injection SI Two-Stroke Engine

*Abstract: The paper presents a new method of determination of heat release rate on the base of experimental test in a two-stroke engine with direct gasoline injection. The target of the work was achieving of information about implementation of approximated Wiebe function in mathematical models and simulation computer programs of a combustion process in spark ignition two-stroke engine with direct fuel injection due to the lack of such data in the literature. The energy balance equations were derived in order to determine of heat release rate on the base of pressure measurements in the cylinder and change of the cylinder volume in the function of angle of crankshaft rotation. The paper presents several examples of heat release and approximate function, for which variable coefficients of Wiebe function were determined for certain rotational speeds at wide opening throttle. Pressure measurements were carried out on the engine Robin EC12 with capacity 115 cm<sup>3</sup>. Determination of heat release and burned fuel rate was calculated by means of own computer program. The paper also presents the method of determination of variable specific heat coefficients in the function of crankshaft rotation, which are also used in modeling of the engine processes.*

Key words: transport, two-stroke engines, direct fuel injection, heat release

### Wydzielanie ciepła w w dwusuwowym silniku ZI z bezpośrednim wtryskiem paliwa

*Streszczenie: Artykuł przedstawia nowy sposób określenia wydzielania się ciepła na podstawie badań eksperymentalnych pomiaru ciśnień w dwusuwowym silniku ZI z bezpośrednim wtryskiem benzyny. Celem pracy było otrzymanie informacji o implementacji aproksymowanej funkcji Wiebe w modelach matematycznych i programach symulacyjnych procesu spalania w dwusuwowym silniku o zapłonie iskrowym z bezpośrednim wtryskiem paliwa z powodu braku takich danych w literaturze. Wyprowadzono równania bilansu energii celem określenia wydzielania się ciepła na podstawie pomiarów ciśnienia oraz zmiany objętości cylindra w funkcji kąta obrotu wału korbowego. Przedstawiono kilka przykładów wydzielania się ciepła oraz aproksymowanych funkcji, dla których określono zmienne współczynniki Wiebe dla wybranych prędkości obrotowych i pełnego otwarcia przepustnicy. Badania pomiaru ciśnień w cylindrze zostały przeprowadzone na silniku Robin EC12 o pojemności skokowej 115 cm<sup>3</sup>. Określenie wydzielania się ciepła i stopnia spalania paliwa było obliczane za pomocą własnego programu komputerowego. Artykuł przedstawia również sposób określenia zmiennych współczynników ciepła właściwych w funkcji obrotu wału korbowego, które również są wykorzystywane w modelowaniu procesów silnikowych.*

Słowa kluczowe: transport, silniki dwusuwowe, bezpośredni wtrysk paliwa, wydzielanie się ciepła

### 1. Introduction

Process of heat release in internal combustion engines is one of the most important factors influencing on engine work parameters and exhaust gas emission. Very fast combustion process leads to rapid increase of cylinder pressure and temperature and is the main reason of a big NO<sub>x</sub> emission. Sometimes this phenomenon is the reason of combustion knocking in spark ignition engines. However, short time of fuel burning leads to obtain a higher power and higher total efficiency. The main problem of conventional loop scavenged two-stroke spark ignition engines is a big hydrocarbon emission and big specific fuel consumption caused by escaping of a part fuel mixture to the exhaust port during scavenge process. The charge in the cylinder before the ignition consists in almost 30% of residual gases from the previous work cycle. Most of burnt gases occupy the space near the exhaust port. It is caused by fresh fuel-air mixture flow from the

transfer ports. Usually the space near the spark plug is fulfilled by fresh mixture and there is no problem with the ignition of the charge. The new fuelling system of two-stroke engine was worked out by the authors in Cracow University of Technology in order to eliminate their basic faults and imperfections. The high pressure direct fuel injection system was applied to the industrial small capacity (115 cm<sup>3</sup>) two-stroke engine Robin EC12 from Fuji Heavy Industries. Applying of direct fuel injection decreased both specific fuel consumption and hydrocarbon emission. The research work carried out by authors on small capacity two-stroke engine with direct fuel injection is one of the first in Poland. Recently most research work for analyzing of different engine systems is carried out computer by computer simulations. Simulation of combustion process in 0-dimensional model requires verified model of heat release. In the world literature one cannot find such model for two-stroke engine with direct fuel injection. Therefore much work was

concerned to find an approximation Vibe function for full loads and rotational speed of tested engine.

## 2. Direct fuel injection in 2-stroke engine

In the world only one industrial application of direct fuel injection in outboards high power multi-cylinder two-stroke engines from Mercury Marine (in marine boats) is known. The main advantages of applying of such engines are compactness, high unit power, lightness and possibility of working in different position. There are many small two-wheel and three wheel vehicles driven by carburetted two-stroke engines in the world. Limitation of exhaust gas emission and fuel consumption of such engines is a main object of recent research works concerning such engines. The goal of the author's work was to define the injector position in the combustion chamber with regard of the air-fuel mixture motion and orientation of fuel spray and determination of these factors on the combustion process and exhaust gas emission. Such relations could be simply done by CFD simulations by different injector orientation in the combustion chamber. For that case KIVA3V program was used as common tools for solving combustion and fuel injection problems in internal combustion engines. The fundamental goal of the work was determination of following aspects:

- influence of the injector location in respect to possible ignition of the air-fuel mixture and influence of gas motion on mixture distribution by using CFD simulation,
- comparison of working parameters of DFI and carburettor two-stroke engine,
- comparison of exhaust gas emission in the both engine versions,
- decreasing of specific fuel consumption and pollutants emission,
- determination of heat release rate on experimental pressure measurements and Vibe function for zero-dimensional models of two-stroke engines with direct fuel injection, because such functions are not met in literature,
- influence of fuel injection pressure on working parameters and exhaust gas emission,

## 3. Heat release in DFI engine

Thermodynamic state of combustion engines is presented widely in literature e.g. by Heywood [9], Blair [4] and Mitianiec [16, 17]. Fluid dynamics of fuel injection process is still under development and was a subject of the work of Feath [7], Ghandi [8], Ikeda [12] or Melton [15]. Combustion processes and charge turbulence are described e.g. by Chen and Kim [5], Spalding [20] or Higelin [11]. The engine cylinder after closing of transfer and exhaust ports is a close thermodynamic system. The First Law of Thermodynamics for such closed system states that heat delivered to the charge  $dQ_R$  in-

creases internal energy  $dU$  and some has been lost through heat transfer  $dQ_c$  to the cylinder walls and coolant at the same time and work done by the piston  $dW$ .

$$dQ_R - dQ_c - dQ_{vap} = dU + dW \quad (1)$$

The term  $dQ_{vap}$  can be neglected because in spark ignition engines almost whole fuel is in vapor state during combustion process. Increment of internal energy in the close system is a function of increment of temperature.

$$dU = mc_v dT \quad (2)$$

The specific heat at constant volume  $c_v$  is a function of temperature and also of the gas properties. During combustion process temperature and properties of the charge change rapidly. Thus  $c_v$  is not a constant value and should be determining every time during measurement or calculation.

$$pV = mRT \quad (3)$$

$$c_v = \frac{R}{k-1} \quad (4)$$

After differentiation of the state equation of close system at assumption of constant mass of charge  $m$  and gas constant  $R$ :

$$pdV + Vdp = mRdT \quad (5a)$$

$$dT = \frac{pdV + Vdp}{mR} \quad (5b)$$

After substitution to the equation of internal energy

$$dU = \frac{pdV - Vdp}{k-1} \quad (6)$$

Average work done on the piston during time interval is:

$$dW = pdV \quad (7)$$

After substitution to the main formula (1):

$$dQ_R - dQ_c = \frac{pdV + Vdp}{k-1} + pdV \quad (8)$$

If the combustion process had not occurred, then the compression or expansion process would have continued in a normal fashion. The polytropic process is taking place with relationship defined by:

$$pV^n = \text{const} \quad (9)$$

$$V^n dp + npV^{n-1} dV = 0 \quad (10a)$$

$$\frac{dp}{p} + np \frac{dV}{V} = 0 \quad (10b)$$

In imaginary process is one of non-heat addition  $dQ_R$  is zero and the First Law of Thermodynamics could be rewritten to calculate the heat loss  $dQ_c$  by substituting of formula (9) and the following dependence can be written [4]:

$$-dQ_c = p_1 \left\{ \frac{V_2 \left( \frac{V_1}{V_2} \right)^n - V_1}{k-1} + \frac{(V_2 - V_1) \left( \left( \frac{V_1}{V_2} \right)^n + 1 \right)}{2} \right\} \quad (11)$$

On the assumption that the heat loss is the same and continues during the combustion process the following equation on the heat release rate (HRR) can be determined:

$$dQ_R = \left\{ p_2 - p_1 \left( \frac{V_1}{V_2} \right)^n \right\} \left( \frac{V_2}{k-1} + \frac{V_2 - V_1}{2} \right) \quad (12)$$

Rasseweiler and Withrow [21] proposed another simpler form:

$$dQ_R = \left\{ p_2 - p_1 \left( \frac{V_1}{V_2} \right)^n \right\} \left( \frac{V_2}{k-1} \right) \quad (13)$$

Specific heat at constant volume  $c_v$  is a function of temperature  $T$  and can be determined on JANAF Tables [13] and can be expressed as:

$$c_p = A_1 + A_2 z + A_3 z^2 + A_4 z^3 + A_5 z^4 + \frac{A_5}{z^2} \quad (14)$$

where  $z = T/1000$  and coefficients of the polynomial amount as follows:

$$A_1 = -0.917 \quad A_2 = 9.775 \quad A_3 = -7.682 \quad A_4 = 2.466 \quad A_5 = 0.022$$

In order to determine temperature in the cylinder during combustion process, the mass of charge should be known. In the calculations the authors took this value from CFD calculations of the whole engine work cycle. The gas constant  $R$  changes during combustion, however it is close to the gas constant of the air. On these simple assumptions the gas temperature can be calculated. Polytropic exponent  $n$  is obtained from equation (9) by measured pressure values during whole combustion period  $\Delta\alpha_b$  from the state 1 and state 2 and calculated volumes at these states. Total released heat  $Q_t$  can be determined by integration of heat release rate at combustion period:

$$Q_t = \int_{\alpha_1}^{\alpha_2} dQ_R d\alpha \quad (15)$$

where index 1 signifies state 1 as the beginning of combustion and state 2 signifies the end of combustion.

The current burned mass ratio  $x_z$  is determined as follows:

$$x_z = \frac{\int_1^\alpha Q_R d\alpha}{Q_t} \quad (16)$$

In the engine theory of combustion engines the Vibe [22] function is used for determination of combustion process based on approximation of measured pressure on real engines. This function is commonly used in literature [4, 12] and research work for analysis of combustion process in piston engines. Vibe function in most cases takes the following form:

$$x_z = 1 - \exp \left( a \left( \frac{\alpha - \alpha_1}{\Delta\alpha_b} \right)^m \right) \quad (17)$$

The angle  $\alpha$  is the current angle of crankshaft position,  $\alpha_1$  is an angle of crankshaft position, when combustion process begins, on the contrary  $\Delta\alpha_b$  is total angle of crankshaft rotation during combustion process. The coefficients  $a$  and  $m$  are determined by continuous change their values until the shape of Vibe function reaches measured fuel mass burned ratio. Vibe functions is a common used approximation function in definition of heat release rate during combustion process and is regarded as the best approximation function for determination of ratio of burned fuel. It is needed in 0-dimensional model used in computer program simulations for analysis of whole engine system. Determination of coefficients in Vibe function for verification of combustion model applied in own ICE models and GT-Power software, used in this work, was needed.

## 4. Experimental test

The engine was tested on the dynamometer stand with experimental high pressure direct injection system and apparatus for measurement of exhaust gas emission. The experimental tests were carried out both for standard carburetted engine and for high pressure direct fuel injection engine. During experimental investigations the influence of injection timing and fuel pressure level for different loads and engine rotational speeds was registered. Preliminary results of the tests showed advantages and disadvantages of applied feeding system. The whole two-stroke engine systems are shown in diagram presented in Fig. 1. Fuel injection process was fully controlled by electronic devices and computer software in Labview environment. Engine was tested for different loads at chosen rotational speeds with modification of injection parameters such as injection time, angle of injection advance in relation to TDC and injection pressure. It was found and optimal value of injection pressure between 50

and 60 bar for applied automotive injector. One of the main tasks was to measure cylinder and crankcase pressure in order to determine heat release rate and mass burned ratio. On the base of such experiment one can find an approximation Vibe function. The method of determination of such function was described in section 3.

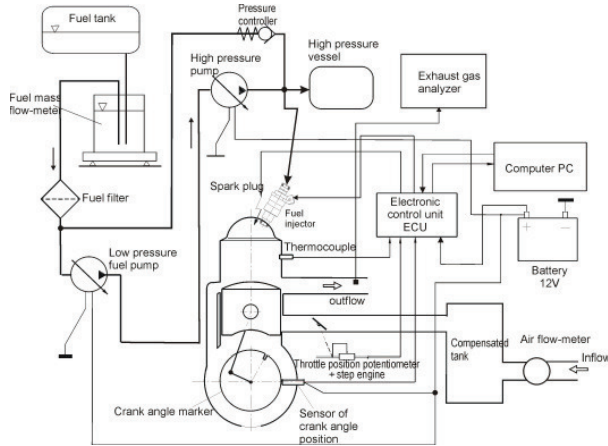


Figure 1. Diagram of two-stroke engine with direct fuel injection system

The tests concerns also measurement of cylinder pressure for different loads and rotational speeds. For that reason the piezo-optical sensor from Optrand company was used, which was directly mounted in the wall of cylinder head. Another Kistler piezo-resistive sensor measured pressure inside engine crankcase. All electric signals from sensors were transformed by amplifiers to the computer in the function of crank angle (encoder) and variations of pressure can be performed on the graphs.

## 5. Measurement results

Variation of pressure in the cylinder reflects combustion process. Higher increment of pressure is caused by faster fuel burning. Figure 2 presents pressure traces in the cylinder and crankcase of two-stroke engine with direct fuel injection at 100% throttle opening for engine speed 3300 rpm. It is observed inequality of the pressure maximum from cycle to cycle.

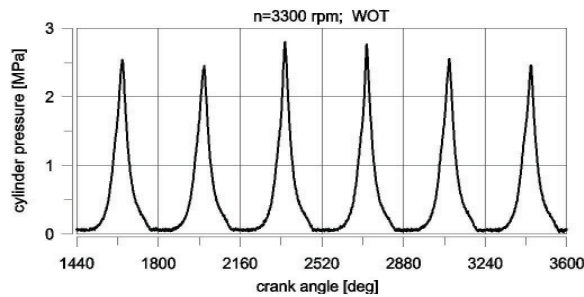


Figure 2. Inequality of pressure in engine with direct fuel injection at 2750 rpm 50% WOT

The maximum pressure in the cylinder changes from 2.3 to 2.68 MPa. It is caused by existing of the rest of exhaust gases and not complete cleaning of the cylinder by the fresh air during the scavenge process. The rest of exhaust gases stays in the cylinder after closing of the ports as a result of incomplete scavenging by fresh air, when both exhaust and transfer ports are opened. Strong dynamic effect of pressure waves in the exhaust system takes place in two-stroke engines, which stops the outflow of the gases. Therefore the injected fuel does not form a proper mixture composition, which enables good combustion process. Mean temperature of the charge during combustion was calculated on the base of pressure measurement and general formula of gas state:

$$T = \frac{pV}{mR} \quad (18)$$

It can be noticed in Fig. 3 that the maximum of pressure takes place at 20 deg ATDC of piston position, however ignition takes place at constant value 20 deg BTDC of ignition advance. Combustion process is elongated in comparison to four stroke engines. Maximum pressure a little bit exceeds 2.5 MPa and is typical value for industrial two-stroke engines and combustion process takes place without knocking. The crankcase pressure variation is shown also in Fig.3, which changes from 0.075 to 0.135 MPa.

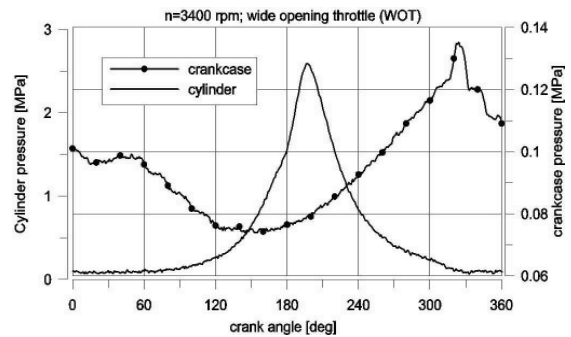


Figure 3. Cylinder and crankcase pressure traces at 3400 rpm and WOT

When the transfer ports start to open the pressure in the cylinder is higher than in the crankcase. The exhaust gases from the cylinder flow to the transfer ports causing a rapid increase of pressure in the crankcase. Figure 4 presents variation of pressure of the cylinder charge and temperature, which was calculated on the base of eq. (18) in the range of combustion process. For considered rotational speed 3400 rpm the maximum of temperature takes place about 30 deg ATDC and insignificantly exceeds 2000 K. Low value of the maximal temperature is caused by longer time of combustion process and lower heat released rate. Combustion process is

retarded by big amount of exhaust gases in the fuel mixture.

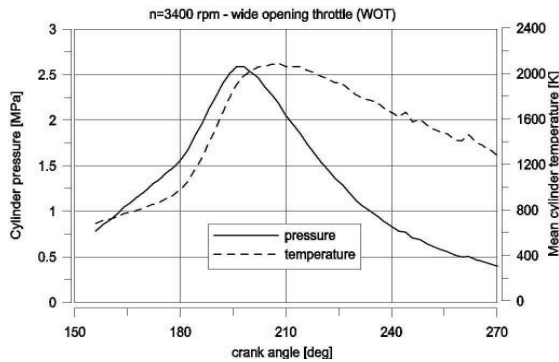


Figure 4. Cylinder temperature and pressure during combustion process at 3400 rpm

Validation of applied mathematical model was one of the tasks in the work. Many factors influence on pressure variation both in the cylinder and crankcase particularly non-steady gas flow in all cylinder ducts and pipes, charge exchange through the ports or heat exchange with walls. One carried out several calculations of pressure changes in these spaces by using GT-Power software by applying of Vibe function of fuel burning ratio with coefficients obtained from experiment. Figure 5 shows comparison of pressure changes in the cylinder and crankcase at full load and rotational speed 2750 rpm. One can notice a good correlation between measured pressure and calculated pressure.

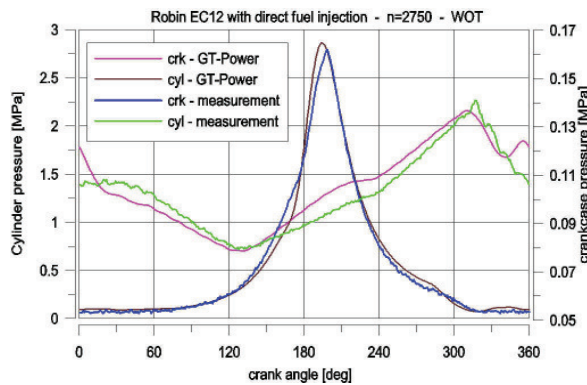


Figure 5. Comparison of calculated and measured pressure in cylinder and crankcase

## 6. Calculation of heat release

On the base of observation of many pressure traces achieved from the indicated measurements it was not found any abnormal combustion process. In a support of the pressure indicating diagram and formulas (12 – 17) presented in the section 3 the heat released rate and total heat released were calculated. One example of heat released rate (HRR) and total heat released in a function of crank angle for two-stroke engine with direct fuel injection is presented in Fig. 6 for engine rotational speed 3400 rpm. Total heat released shows the energy given to

the charge. Increment of charge energy is a function of consumed fuel during combustion process. Variation of total heat released is shown in Fig. 7 for the same engine rotational speed. The burning period amounts 60 deg of crankshaft rotation and maximum of heat release rate amounts 16 J/deg and total heat released reaches value 330 J. Combustion process in the DFI two-stroke engine runs with non-monotonically heat released rate and maximal value of HRR takes place at maximum of pressure (15 deg ATDC).

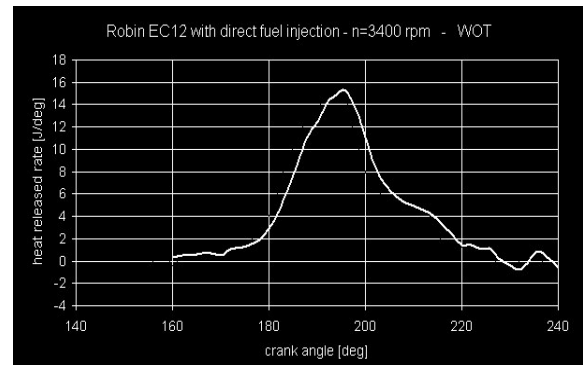


Figure 6. Heat release rate at 3400 rpm

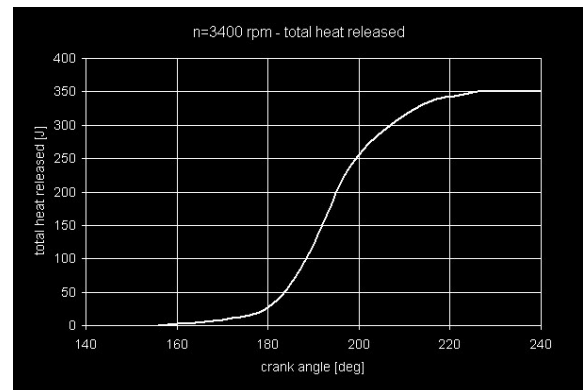


Figure 7. Total heat released during crankshaft rotation at 3400 rpm and full load

More rapid combustion process takes place after TDC and lasts about 20° CA and then the rest of fuel burns much slower, which is caused by increasing of the cylinder volume and lower turbulence of charge. Variation of fuel mass burned ratio is shown in Fig.8.

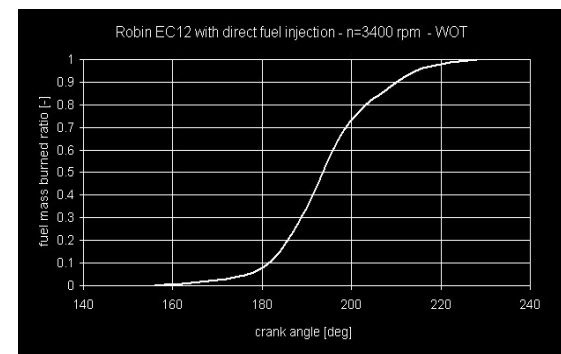


Figure 8. Variation of fuel mass burned ratio at 3400 rpm

Variations of volume specific heat and specific heat ratio are shown in Fig. 9 for the same rotational speed. In this engine the changeable HRR is caused by burning of non-homogenous mixture with different local air excess coefficient  $\lambda$ . In Fig.9 the indexes 1 and 2 represent the beginning and the end of combustion process.

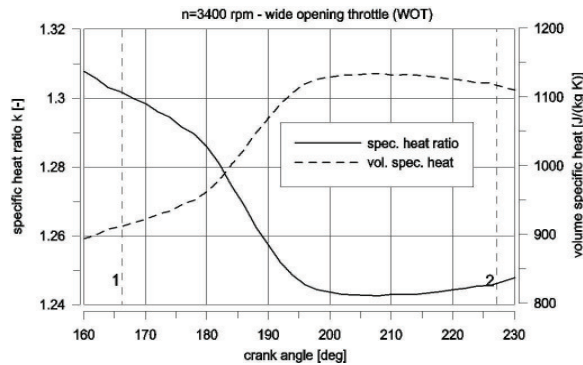


Figure 9. Variations of specific heat at constant volume and specific heat ratio during combustion process at 3400 rpm

## 7. Vibe functions

For the simulation of combustion process the Vibe function is widely used and in some computer programs the parameters  $a$  and  $m$  are needed. Approximation functions of the combustion process for direct fuel injection two-stroke engines are not met in the literature. Equations (16) and (17) enable to obtain the approximated Vibe function for different loads and rotational speeds. It is not possible to find the exact Vibe function for the real combustion process. Two examples of mass burned rate and approximated Vibe function are presented in Fig. 10 and 11 at 2750 rpm and 3400 rpm, respectively.

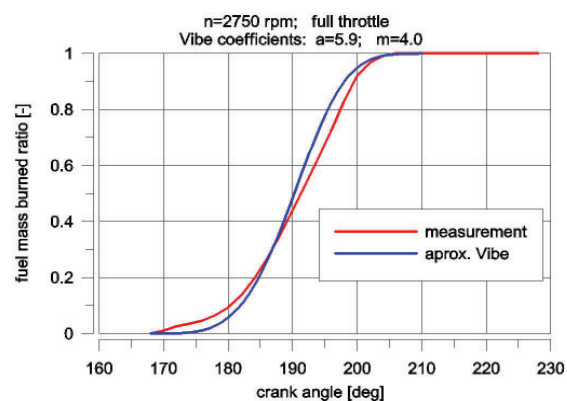


Figure 10. Fuel mass burned ratio and approximated Vibe function in combustion process at 2750 rpm

At lower rotational speed 2750 rpm the burning period amounted to 36 deg CA (2.18 ms) and is shorter than at higher rotational speed 3400 rpm where the burning period amounted to 55 deg CA (2.69 ms). The selected coefficients in Vibe function amount as follows:

$n=2750$  rpm  $a=5.9$   $m=4.0$   
 $n=3400$  rpm  $a=6.0$   $m=2.6$

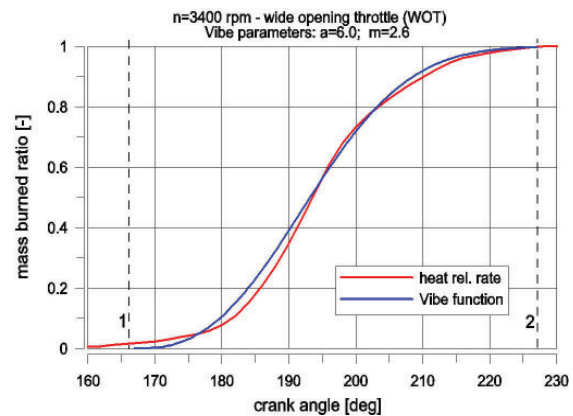


Figure 13. Fuel mass burned ratio and approximated Vibe function in combustion process at 3400 rpm

At lower rotational speeds of DFI two-stroke engine the burning process is quicker than at higher speeds, where that process is more softly. For carburetted version the measured brake mean effective pressure is slightly higher than for DFI system in lower rotational speeds. For the sake of applied commercial injector tests of DFI engine were carried out in smaller engine range of rotational speed (2200 – 4200 rpm). One can state that coefficients in Vibe function are depended on engine load and rotational speed. However the first  $a$  coefficient can receive value about 6.0 independently of rotational speed. The second parameter  $m$  should decrease with rotational speed because of lengthen of combustion process accordance to crankshaft rotation and should be in the range of 2.2 to 4.0 for this engine.

## 8. Conclusions

The tested two-stroke industrial engine Robin EC12 was fitted with high pressure standard automotive injector applied in DFI four-stroke engines, which is not suitable for small capacity two-stroke engine. Applying of an injector with smaller fuel mass flow rate (special design) can improve the engine work parameters and exhaust gas emission can be decreased than for tested configuration. On the carried out calculations and experimental work some conclusions can be presented.

1. On the base of pressure measurements in the cylinder the unknown parameters of the approximate Vibe function were matched for some rotational speeds. This approximation function is needed in the most 0-dimensional models of combustion process in the piston engines. The time of fuel combustion increases with rotational speed.
2. Combustion process is determined by engine rotational speed, injected fuel mass, injection timing and charge turbulence in the combustion

---

---

chamber. Knowing of the real combustion time of given fuel dose and the parameters of Vibe function the heat release rate can be calculated in the computer program with 0-dimensional combustion model.

3. For DFI engine injection process takes place after closing of the exhaust ports and only unburned fuel is delivered to the outflow system. Direct fuel injection does not assure higher engine power for two-stroke engine. Thus for the same global air-fuel ratio in the cylinder the engine has almost the same power for both versions, however with direct fuel injection system the engine has lower bsfc. Propagation of the fuel jet in DFI engine depends strongly on the gas

motion in the combustion chamber, which is caused by the scavenge process and squeezing effect.

4. The paper does not present results of exhaust gas emission, however one should say that two-stroke engine with DFI system reduces significantly this emission. The modified engine almost ten times reduces hydrocarbons emission as an effect of elimination of escaping of fuel mixture during the scavenge process. Volumetric concentration of HC changes with rotational speeds and can reach values below 100 ppm. The HC emission for  $\lambda=1$  for the tested engine HC emission reaches 2 g/kWh. Volumetric ratio of NOx does not exceed 300 ppm at whole range of engine load.

---

### Nomenclature/Skróty i oznaczenia

CFD	Computational Fluid Dynamics / <i>obliczeniowa dynamika płynów</i>	BTDC	Before Top Dead Centre / <i>przed górnym martwym punktem</i>
DFI	Direct Fuel Injection / <i>bezpośredni wtrysk paliwa</i>	HRR	Heat Release Rate / <i>szybkość wyzwalania się ciepła</i>
TDC	Top Dead Centre / <i>górnym martwym punktem</i>	bsfc	brutto specific fuel consumption / <i>sfektywne jednostkowe zużycie paliwa</i>
ATDC	After Top Dead Centre / <i>po górnym martwym punkcie</i>		

---

### Bibliography/Literatura

- [1] Agawral A., Assanis D.: Multi-Dimensional Modeling of Natural Gas Ignition Under Compression Ignition Conditions Using Detailed Chemistry, SAE Paper 980136
- [2] Amsden A.A. et al: KIVA: A Computer Program for Two- and Three-Dimensional Fluid Flows with Chemical Reactions and Fuel Sprays. Rept. LA-10245-MS, 1985.
- [3] Amsden A.A., O'Rourke P.J., Butler T.D.: KIVA-II – A Computer Program for Chemically Reactive Flows with Sprays, Los Alamos National Lab., LA-11560-MS, 1989
- [4] Blair G. P.: Design and Simulation of Four-Stroke Engines, SAE R-161, Warrendale, 1980
- [5] Chen Y.S., Kim S.W.: Computation of Turbulent Flows Using an Extended k-e turbulence closure model. NASA CR-179204, 1987.
- [6] Elshnawi M., Teodorczyk A.: Validation of detailed reaction mechanisms for simulations of combustion systems with gas injection, Journal of Kones, Vol. 9, No 1-2, Warsaw-Gdansk , 2002.
- [7] Faeth G. M.: Evaporation and Combustion of Sprays. Prog. Energy Comb. Sci., Vol. 9. pp 1-76, 1983
- [8] Ghandi J.B. et al.: Investigation of the Fuel Distribution in a Two-Stroke Engine with an Air-Assisted Injector. SAE Paper 940394. SAE Int. Congress & Exp., Detroit, 1994.
- [9] Heywood J. B.: Internal Combustion Engine Fundamentals, Mc Graw-Hill, 1988
- [10] Heywood J. B.: Combustion and its modeling in Spark Ignition Engines, International Symposium COMODIA 94, Paper C94-P001, 1994
- [11] Higelin P., Mounaim-Rouselle C., Pajot O., Robinet C., Moreau B.: Flame Propagation in an SI Engine with a Non-Conventional Igniter, The Fourth International Symposium COMODIA 98, Paper C98-P341, 1998
- [12] Ikeda Y., Nakajima T., Kurihara N.: Spray Formation of Air-Assist Injection for Two-Stroke Engine. SAE Paper 950271. SAE Int. Congress & Exposition, Detroit, 1995
- [13] JANAF Thermochemical Tables, National Bureau of Standards Publication NSRDS-NBS37, 1971
- [14] Kuo T., Reitz R.: Three-dimensional computations of combustion in premixed-charge and direct-injected two-stroke engines. SAE paper 920425, 1992.
- [15] Melton L.A.: Exciplex-Based Vapor/Liquid Visualization Systems Appropriate for Automotive Gasolines. Report #1, Contract #27, Texas High Education Coordination Board. November 1990.
- [16] Mitianiec W.: Wtrysk paliwa w silnikach dwusuwowych małej mocy. Polska Akademia Nauk. Kraków, 1999.
- [17] Mitianiec W., Jaroszewski A.: Modele matematyczne procesów fizycznych w silnikach spalinowych małej mocy, Ossolineum, Wrocław-Warszawa-Krakow, 1993

- 
- [18] Nakano D., Suzuki T., Matsui M.: Gas Engine Ignition System for Long-Life Spark Plugs, SAE Paper 2004-32-0086 / 20044373, SETC Graz, 2004.
- [19] Sendyka B., Noga M.: Propagation of flame whirl at combustion of lean natural gas charge in a chamber of cylindrical shape, Combustion Engines, 2007-SC2, PTNSS , Bielsko Biala 2007

Mr Wladyslaw Mitianiec, DSc., DEng.  
– Associate Professor in the Faculty of Mechanical Engineering at Cracow University of Technology.

*Dr hab. inż. Władysław Mitianiec – adiunkt na Wydziale Mechanicznym Politechniki Krakowskiej*

Photo of Author1



- [20] Spalding D.B.: Combustion and Mass transfer, Pergamon Press, 1979
- [21] Rassweiler G.M., Withrow L.: Motion Pictures of Engine Flames Correlated with Pressure Cards, SAE Paper 800131, Warrendale, 1980
- [22] Vibe I. I.: Brennverlauf und Kreisproceß von Verbrennungs-motoren, VEB Technik, Berlin, 1970

Mr Marian Forma, MSc., Eng.  
Automotive expert

*Mgr inż. Marian Forma  
Rzeczoznawca samochodowy*

Photo of Author2

