

Kołowrocki Krzysztof

ORCID ID: 0000-0002-4836-4976

Kuligowska Ewa

ORCID ID: 0000-0002-6704-9541

Soszyńska-Budny Joanna

ORCID ID: 0000-0003-1525-9392

Gdynia Maritime University, Gdynia, Poland

Integrated impact model on critical infrastructure safety related to operation process including operating environment threats

Keywords

Environment threats, safety, impact, model, operation process.

Abstract

The main aim of this paper is to present the general safety analytical models of complex multistate technical systems related to their operation processes including operating environment threats. In the case of critical infrastructure, the determination of its safety function and its risk function, which graph corresponds to the fragility curve are defined. Moreover, its mean lifetime up to the exceeding a critical safety state and the moment when its risk function value exceeds the acceptable safety level and the critical infrastructure and its components intensities of degradation and the coefficients of operation process including operating environment threats influence on the critical infrastructure and its components intensities of degradation are introduced as the other significant safety indicators. The proposed models are given for multistate series, parallel, “ m out of n ”, consecutive “ m out of n : F”, series-parallel, parallel-series, series-“ m out of k ”, “ m_i out of l_i ”-series, series-consecutive “ m out of k : F” and consecutive “ m_i out of l_i ”: F”-series systems.

1. Introduction

The main objective of this paper is to present recently developed, the general safety analytical models of complex multistate technical systems related to their operation processes including operating environment threats [Kołowrocki, Soszyńska-Budny, 2011] and to apply them practically to real industrial systems and critical infrastructures. There are presented general safety analytical models of complex multistate technical systems related to their operation processes including operating environment threats. They are the integrated general models of complex technical systems, linking their multistate safety models and the models of their operation processes including operating environment threats and considering variable at the different operation states safety structures and their components safety parameters.

The conditional safety functions at the system particular operation states and independent of the system particular operation states the unconditional safety function and the risk function of the complex technical systems are defined. These joint models of the safety and the variable in time system operation processes including operating environment threats are constructed for multistate series, parallel, “ m out of n ”, consecutive “ m out of n : F”, series-parallel, parallel-series, series-“ m out of k ”, “ m_i out of l_i ”-series, series-consecutive “ m out of k : F” and consecutive “ m_i out of l_i ”: F”-series systems. The joint models are applied to determining safety characteristics of these systems related to their varying in time safety structures and their components safety characteristics. Under the assumption that the considered systems are

exponential, the unconditional safety functions of these systems are determined.

The proposed models and methods can be applied to the exemplary critical infrastructures safety analysis, evaluation and prediction, i.e. the port oil piping transportation system and the maritime ferry technical system related to varying in time their operation processes including operating environment threats having an influence on their safety structures and components safety parameters.

Most real technical systems are structurally very complex and they often have complicated operation processes. Large numbers of components and subsystems and their operating complexity cause that the evaluation and prediction of their safety is difficult. The time dependent interactions between the systems' operation processes operation states changing and the systems' structures and their components safety states changing processes are evident features of most real technical systems and critical infrastructures as well. The common safety and operation including operating environment threats analysis of these complex technical systems and critical infrastructures is of great value in the industrial practice. The convenient tools for analyzing this problem are the multistate system's safety modeling [Kołowrocki, Soszyńska-Budny, 2011; Xue, 1985; Xue, Yang, 1995a-b] commonly used with the semi-Markov modeling [Ferreira, Pacheco, 2007; Glynn, Hass, 2006; Grabski, 2014; Kołowrocki 2014; Limnios, Oprisan, 2005; Mercier 2008] of the systems operation processes including operating environment threats [EU-CIRCLE Report D3.3-GMU3-CIOP Model2, 2016], leading to the construction the joint general safety models of the complex technical systems and critical infrastructures related to their operation process and the operating environment threats influence on their safety structures and their components safety parameters. In the case of critical infrastructure, the determination of its safety function and its risk function, which graph corresponds to the fragility curve, are crucial indicators/indices for safety practitioners. Other practically significant discussed in the report critical infrastructure safety indicators are its mean lifetime up to the exceeding a critical safety state and the moment when its risk function value exceeds the acceptable safety level and the critical infrastructure and its components intensities of degradation and the coefficients of operation process including operating environment threats influence on the critical infrastructure and its components intensities of degradation.

2. System operation at variable conditions including operating environment threats

We assume as in [EU-CIRCLE Report D3.3-GMU3-CIOP Model2, 2016] that the system during its operation process is taking $v', v' \in N$, different operation states $z'_1, z'_2, \dots, z'_{v'}$. Further, we define the critical infrastructure new operation process $Z'(t)$, $t \in \langle 0, +\infty \rangle$, related to the critical infrastructure operating environment threats with discrete operation states from the set $\{z'_1, z'_2, \dots, z'_{v'}\}$. Moreover, we assume that the critical infrastructure operation process $Z'(t)$ related to its operating environment threats is a semi-Markov process similar to that one considered in Section 2.1 [EU-CIRCLE Report D3.3-GMU3-CIOP Model2, 2016] with the conditional sojourn times θ'_{bl} at the operation states z'_b when its next operation state is z'_l , $b, l = 1, 2, \dots, v'$, $b \neq l$.

Under these assumptions, the critical infrastructure operation process may be described by [EU-CIRCLE Report D3.3-GMU3-CIOP Model2, 2016]:

- the vector $[p'_b(0)]_{1 \times v'}$ of the initial probabilities $p'_b(0) = P(Z'(0) = z'_b)$, $b = 1, 2, \dots, v'$, of the system operation process $Z'(t)$ staying at particular operation states at the moment $t = 0$;
- the matrix $[p'_{bl}]_{v' \times v'}$ of probabilities p'_{bl} , $b, l = 1, 2, \dots, v'$, $b \neq l$, of the system operation process $Z'(t)$ transitions between the operation states z'_b and z'_l ;
- the matrix $[H'_{bl}(t)]_{v' \times v'}$ of conditional distribution functions $H'_{bl}(t) = P(\theta'_{bl} < t)$, $t \geq 0$, $b, l = 1, 2, \dots, v'$, $b \neq l$, of the system operation process $Z'(t)$ conditional sojourn times θ'_{bl} at the operation states.

As the mean values $E[\theta'_{bl}]$ of the conditional sojourn times θ'_{bl} are given by

$$M'_{bl} = E[\theta'_{bl}] = \int_0^{\infty} t dH'_{bl}(t), \quad b, l = 1, 2, \dots, v', \quad b \neq l, \quad (1)$$

then from the formula for total probability, it follows that the unconditional distribution functions of the sojourn times θ'_b , $b = 1, 2, \dots, v'$, of the system operation process $Z'(t)$ at the operation states z'_b , $b = 1, 2, \dots, v'$, are given by [Kołowrocki, Soszyńska-Budny, 2011], [EU-CIRCLE Report D3.3-GMU3-CIOP Model2, 2016]

$$H'_b(t) = \sum_{l=1}^{v'} p'_{bl} H'_{bl}(t), \quad t \geq 0, \quad b = 1, 2, \dots, v'. \quad (2)$$

Hence, the mean values $E[\theta'_b]$ of the system operation process $Z'(t)$ unconditional sojourn times θ'_b , $b = 1, 2, \dots, v'$, at the operation states are given by

$$M'_b = E[\theta'_b] = \sum_{l=1}^{v'} p'_{bl} M'_{bl}, \quad b = 1, 2, \dots, v', \quad (3)$$

where M'_{bl} are defined by the formula (1).

The limit values of the system operation process $Z'(t)$ transient probabilities at the particular operation states $p'_b(t) = P(Z'(t) = z'_b)$, $t \in <0, +\infty)$, $b = 1, 2, \dots, v'$, are given by [Kołowrocki, Soszyńska-Budny, 2011], [EU-CIRCLE Report D3.3-GMU3-CIOP Model2, 2016]

$$p'_b = \lim_{t \rightarrow \infty} p'_b(t) = \frac{\pi'_b M'_b}{\sum_{l=1}^{v'} \pi'_l M'_l}, \quad b = 1, 2, \dots, v', \quad (4)$$

where M'_b , $b = 1, 2, \dots, v'$, are given by (3), while the steady probabilities π'_b of the vector $[\pi'_b]_{1 \times v'}$ satisfy the system of equations

$$\begin{cases} [\pi'_b] = [\pi'_b] [p'_{bl}] \\ \sum_{l=1}^{v'} \pi'_l = 1. \end{cases} \quad (5)$$

In the case of a periodic system operation process, the limit transient probabilities p'_b , $b = 1, 2, \dots, v'$, at the operation states given by (4), are the long term proportions of the system operation process $Z'(t)$ sojourn times at the particular operation states z'_b , $b = 1, 2, \dots, v'$.

Other interesting characteristics of the system operation process $Z'(t)$ possible to obtain are its total sojourn times $\hat{\theta}'_b$ at the particular operation states z'_b , $b = 1, 2, \dots, v'$, during the fixed system operation time. It is well known [Kołowrocki, Soszyńska-Budny, 2011], [EU-CIRCLE Report D3.3-GMU3-CIOP Model2, 2016] that the system operation process total sojourn times $\hat{\theta}'_b$ at the particular operation states z'_b , for sufficiently large operation time θ' have approximately normal distributions with the expected value given by

$$\hat{M}'_b = E[\hat{\theta}'_b] = p'_b \theta', \quad b = 1, 2, \dots, v', \quad (6)$$

where p'_b are given by (4).

3. Safety of multistate systems at variable operation conditions including operating environment threats

We assume that the changes of the operation states of the system operation process $Z'(t)$ have an influence on the system multistate components E_i , $i = 1, 2, \dots, n$, safety and the system safety structure as well. Consequently, we denote the system multistate component E_i , $i = 1, 2, \dots, n$, conditional lifetime in the safety state subset $\{u, u+1, \dots, z\}$ while the system is at the operation state z'_b , $b = 1, 2, \dots, v'$, by $T_i^{(b)}(u)$ and its conditional safety function by the vector

$$[S'_i(t, \cdot)]^{(b)} = [1, [S'_i(t, 1)]^{(b)}, \dots, [S'_i(t, z)]^{(b)}], \quad (7)$$

with the coordinates defined by

$$[S'_i(t, u)]^{(b)} = P(T_i^{(b)}(u) > t | Z'(t) = z'_b) \quad (8)$$

for $t \in <0, \infty)$, $u = 1, 2, \dots, z$, $b = 1, 2, \dots, v'$.

The safety function $[S'_i(t, u)]^{(b)}$ is the conditional probability that the component E_i lifetime $T_i^{(b)}(u)$ in the safety state subset $\{u, u+1, \dots, z\}$ is greater than t , while the system operation process $Z'(t)$ is at the operation state z'_b .

In the case, the system components E_i , $i = 1, 2, \dots, n$, at the system operation process $Z'(t)$ states z'_b , $b = 1, 2, \dots, v'$, have the exponential safety functions, the coordinates of the vector (7) are given by

$$\begin{aligned} [S'_i(t, u)]^{(b)} &= P(T_i^{(b)}(u) > t | Z'(t) = z'_b) \\ &= \exp[-[\lambda'_i(u)]^{(b)} t], \\ t \in <0, \infty), \quad b &= 1, 2, \dots, v', \quad i = 1, 2, \dots, n. \end{aligned} \quad (9)$$

Existing in (9) the intensities of ageing/degradation of the system components E_i , $i = 1, 2, \dots, n$, (the intensities of the system components E_i , $i = 1, 2, \dots, n$, departure from the safety state subset $\{u, u+1, \dots, z\}$) at the system operation states z'_b , $b = 1, 2, \dots, v'$, i.e. the coordinates of the vector

$$[\lambda'_i(\cdot)]^{(b)} = [0, [\lambda'_i(1)]^{(b)}, \dots, [\lambda'_i(z)]^{(b)}], \quad t \in <0, +\infty), \quad b = 1, 2, \dots, v', \quad i = 1, 2, \dots, n, \quad (10)$$

are given by

$$[\lambda'_i(u)]^{(b)} = \rho_i^{(b)}(u) \cdot \lambda_i(u),$$

$$u=1,2,\dots,z, b=1,2,\dots,\nu', i=1,2,\dots,n, \quad (11)$$

where $\lambda_i(u)$ are the intensities of ageing of the system components E_i , $i=1,2,\dots,n$, (the intensities of the system components E_i , $i=1,2,\dots,n$, departure from the safety state subset $\{u, u+1, \dots, z\}$) without operation process impact, i.e. the coordinate of the vector

$$\lambda_i(\cdot) = [0, \lambda_i(1), \dots, \lambda_i(z)], i=1,2,\dots,n, \quad (12)$$

and

$$[\rho'_i(u)]^{(b)}, u=1,2,\dots,z, b=1,2,\dots,\nu',$$

$$i=1,2,\dots,n, \quad (13)$$

are the coefficients of operation impact on the system components E_i , $i=1,2,\dots,n$, intensities of ageing (the coefficients of operation impact on critical infrastructure component E_i , $i=1,2,\dots,n$, intensities of departure from the safety state subset $\{u, u+1, \dots, z\}$) at the system operation states z'_b , $b=1,2,\dots,\nu'$, i.e. the coordinate of the vector

$$[\rho'_i(\cdot)]^{(b)} = [0, [\rho'_i(1)]^{(b)}, \dots, [\rho'_i(z)]^{(b)}],$$

$$b=1,2,\dots,\nu', i=1,2,\dots,n. \quad (14)$$

The system component safety function (7), the system components intensities' of ageing (10) and the coefficients of the operation impact on the system components intensities of ageing (14) are main system component safety indices.

Similarly, we denote the system conditional lifetime in the safety state subset $\{u, u+1, \dots, z\}$ while the system is at the operation state z'_b , $b=1,2,\dots,\nu'$, by $T^{(b)}(u)$ and the conditional safety function of the system by the vector

$$[\mathbf{S}'(t, \cdot)]^{(b)} = [1, [\mathbf{S}'(t, 1)]^{(b)}, \dots, [\mathbf{S}'(t, z)]^{(b)}], \quad (15)$$

with the coordinates defined by

$$[\mathbf{S}'(t, u)]^{(b)} = P(T^{(b)}(u) > t | Z'(t) = z'_b) \quad (16)$$

for $t \in \langle 0, \infty \rangle$, $u=1,2,\dots,z$, $b=1,2,\dots,\nu'$.

The safety function $[\mathbf{S}'(t, u)]^{(b)}$ is the conditional probability that the system lifetime $T^{(b)}(u)$ in the safety state subset $\{u, u+1, \dots, z\}$ is greater than t ,

while the system operation process $Z'(t)$ is at the operation state z'_b .

Further, we denote the system unconditional lifetime in the safety state subset $\{u, u+1, \dots, z\}$ by $T'(u)$ and the unconditional safety function of the system by the vector

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)], \quad (17)$$

with the coordinates defined by

$$\mathbf{S}'(t, u) = P(T'(u) > t) \quad (18)$$

for $t \in \langle 0, \infty \rangle$, $u=1,2,\dots,z$.

In the case when the system operation time θ' is large enough, the coordinates of the unconditional safety function of the system defined by (15) are given by

$$\mathbf{S}'(t, u) \cong \sum_{b=1}^{\nu'} p'_b [\mathbf{S}'(t, u)]^{(b)}$$

for $t \geq 0$, $u=1,2,\dots,z$, (19)

where $[\mathbf{S}'(t, u)]^{(b)}$, $u=1,2,\dots,z$, $b=1,2,\dots,\nu'$, are the coordinates of the system conditional safety functions defined by (8)-(9) and p'_b , $b=1,2,\dots,\nu'$, are the system operation process limit transient probabilities given by (4).

The exemplary graph of a five-state ($z=4$) critical infrastructure safety function

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \mathbf{S}'(t, 2), \mathbf{S}'(t, 3), \mathbf{S}'(t, 4)],$$

$$t \in \langle 0, \infty \rangle,$$

is shown in *Figure 1*.

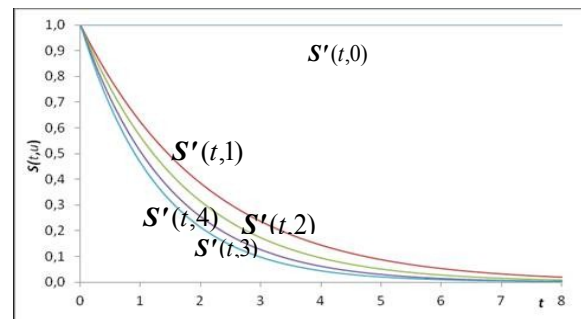


Figure 1. The graphs of a five-state critical infrastructure safety function $\mathbf{S}'(t, \cdot)$ coordinates

The mean value of the system unconditional lifetime $T'(u)$ in the safety state subset $\{u, u+1, \dots, z\}$ is given by [Kołowrocki, Soszyńska-Budny, 2011]

$$\mu'(u) \cong \sum_{b=1}^{\nu'} p'_b \mu'_b(u), \quad u=1,2,\dots,z, \quad (20)$$

where $\mu'_b(u)$ are the mean values of the system conditional lifetimes $T^{(b)}(u)$ in the safety state subset $\{u, u+1, \dots, z\}$ at the operation state z'_b , $b=1,2,\dots,\nu'$, given by

$$\mu'_b(u) = \int_0^{\infty} [\mathbf{S}'(t,u)]^{(b)} dt, \quad u=1,2,\dots,z, \quad (21)$$

$[\mathbf{S}'(t,u)]^{(b)}$, $u=1,2,\dots,z$, $b=1,2,\dots,\nu'$, are defined by (9)-(10) and p'_b are given by (4). Whereas, the variance of the system unconditional lifetime $T'(u)$ is given by

$$\sigma'^2(u) = 2 \int_0^{\infty} t \mathbf{S}'(t,u) dt - [\mu'(u)]^2, \quad u=1,2,\dots,z, \quad (22)$$

where $\mathbf{S}'(t,u)$, $u=1,2,\dots,z$, are given by (17)-(19) and $\mu'(u)$, $u=0,1,\dots,z$, are given by (20)-(21).

Hence, according to (1.19) [Kołowrocki, Soszyńska-Budny, 2011], we get the following formulae for the mean values of the unconditional lifetimes of the system in particular safety states

$$\begin{aligned} \bar{\mu}'(u) &= \mu'(u) - \mu'(u+1), \quad u=0,1,\dots,z-1, \\ \bar{\mu}'(z) &= \mu'(z), \end{aligned} \quad (23)$$

where $\mu'(u)$, $u=0,1,\dots,z$, are given by (20)-(21). Moreover, according (1.20)-(1.21) in [Kołowrocki, Soszyńska-Budny, 2011], if r is the system critical safety state, then the system risk function

$$\begin{aligned} r'(t) &= P(S'(t) < r | S'(0) = z) = P(T'(r) \leq t), \\ t &\in <0, \infty), \end{aligned} \quad (24)$$

defined as a probability that the system is in the subset of safety states worse than the critical safety state r , $r \in \{1, \dots, z\}$ while it was in the safety state z at the moment $t = 0$ [Kołowrocki, 2014], [Kołowrocki, Soszyńska-Budny, 2011] is given by

$$r'(t) = 1 - \mathbf{S}'(t,r), \quad t \in <0, \infty), \quad (25)$$

where $\mathbf{S}'(t,r)$ is the coordinate of the system unconditional safety function given by (19) for $u=r$.

The graph of the system risk function presented in Figure 2 is called the fragility curve of the system.

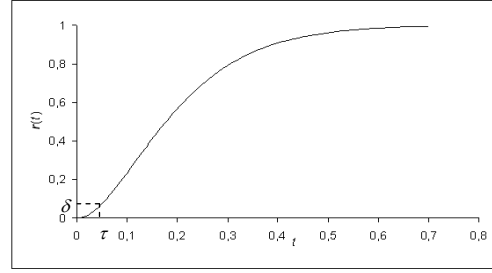


Figure 2. The graph (The fragility curve) of a system risk function $r'(t)$

The system safety function, the system risk function and the system fragility curve are main system safety factors. Other practically useful system safety factors are:

- the mean value of the unconditional system lifetime $T'(r)$ up to the exceeding the critical safety state r given by

$$\mu'(r) \cong \sum_{b=1}^{\nu'} p'_b \mu'_b(r), \quad (26)$$

where $\mu'_b(r)$ are the mean values of the system conditional lifetimes $T^{(b)}(r)$ in the safety state subset $\{r, r+1, \dots, z\}$ at the operation state z'_b , $b=1,2,\dots,\nu'$, given by

$$\mu'_b(r) = \int_0^{\infty} [\mathbf{S}'(t,r)]^{(b)} dt, \quad b=1,2,\dots,\nu', \quad (27)$$

$[\mathbf{S}'(t,r)]^{(b)}$, $u=1,2,\dots,z$, $b=1,2,\dots,\nu'$, are defined by (15)-(16) and p'_b are given by (4);

- the standard deviation of the system lifetime $T'(r)$ up to the exceeding the critical safety state r given by

$$\sigma'(r) = \sqrt{n'(r) - [\mu'(r)]^2}, \quad (28)$$

where

$$n'(r) = 2 \int_0^{\infty} t \mathbf{S}'(t,r) dt, \quad (29)$$

where $\mathbf{S}'(t,r)$ is given by (19) and $\mu'(r)$ is given by (20) for $u=r$;

- the moment τ' the system risk function exceeds a permitted level δ given by

$$\tau' = r'^{-1}(\delta), \quad (30)$$

and illustrated in Figure 2, where $r'^{-1}(t)$, if it exists, is the inverse function of the risk function $r'(t)$ given by (25).

Other critical infrastructure safety indices are:

- the intensities of ageing/degradation of the critical infrastructure (the intensities of critical infrastructure departure from the safety state subset $\{u, u+1, \dots, z\}$) related to the operation process impact, i.e. the coordinates of the vector

$$\lambda'(t, \cdot) = [0, \lambda'(t, 1), \dots, \lambda'(t, z)], \quad t \in \langle 0, +\infty \rangle, \quad (31)$$

where

$$\lambda'(t, u) = \frac{dS'(t, u)}{dt}, \quad t \in \langle 0, +\infty \rangle, \quad u = 1, 2, \dots, z, \quad (32)$$

- the coefficients of operation process impact on the critical infrastructure intensities of ageing (the coefficients of operation process impact on critical infrastructure intensities of departure from the safety state subset $\{u, u+1, \dots, z\}$), i.e. the coordinates of the vector

$$\rho'(t, \cdot) = [0, \rho'(t, 1), \dots, \rho'(t, z)], \quad t \in \langle 0, +\infty \rangle, \quad (33)$$

where

$$\lambda'(t, u) = \rho'(t, u) \cdot \lambda(t, u), \quad t \in \langle 0, +\infty \rangle, \quad u = 1, 2, \dots, z, \quad (34)$$

and $\lambda(t, u)$ are the intensities of ageing of the critical infrastructure (the intensities of the critical infrastructure departure from the safety state subset $\{u, u+1, \dots, z\}$) without of operation impact, i.e. the coordinate of the vector

$$\lambda(t, \cdot) = [0, \lambda(t, 1), \dots, \lambda(t, z)], \quad t \in \langle 0, +\infty \rangle. \quad (35)$$

In the case, the critical infrastructure have the exponential safety functions, i.e.

$$S'(t, \cdot) = [0, S'(t, 1), \dots, S'(t, z)], \quad t \in \langle 0, +\infty \rangle, \quad (36)$$

where

$$S'(t, u) = \exp[-\lambda'(u)t], \quad t \in \langle 0, +\infty \rangle, \quad \lambda'(u) \geq 0, \quad u = 1, 2, \dots, z, \quad (37)$$

the critical infrastructure safety indices defined by (31)-(35) take forms:

- the intensities of ageing of the critical infrastructure (the intensities of critical infrastructure departure from the safety state subset $\{u, u+1, \dots, z\}$) related to the operation impact, i.e. the coordinates of the vector

$$\lambda'(\cdot) = [0, \lambda'(1), \dots, \lambda'(z)], \quad (38)$$

- the coefficients of the operation impact on the critical infrastructure intensities of ageing (the coefficients of the climate-watcher impact on critical infrastructure intensities of departure from the safety state subset $\{u, u+1, \dots, z\}$), i.e. the coordinate of the vector

$$\rho'(\cdot) = [0, \rho'(1), \dots, \rho'(z)], \quad (39)$$

where

$$\lambda'(u) = \rho'(u) \cdot \lambda(u), \quad u = 1, 2, \dots, z. \quad (40)$$

and $\lambda(u)$ are the intensities of ageing of the critical infrastructure (the intensities of the critical infrastructure departure from the safety state subset $\{u, u+1, \dots, z\}$) without of operation impact, i.e. the coordinate of the vector

$$\lambda(\cdot) = [0, \lambda(1), \dots, \lambda(z)]. \quad (41)$$

4. Safety of multistate exponential systems at variable operation conditions including operating environment threats

We assume that the system components at the system operation states have the exponential safety functions. This assumption and the results given in Chapter 1 [Kołowrocki, Soszyńska-Budny, 2011] yield the following results formulated in the form of the following proposition.

Proposition 1

If components of the multi-state system at the operation states z'_b , $b = 1, 2, \dots, \nu'$, have the exponential safety functions given by

$$[S'_i(t, \cdot)]^{(b)} = [1, [S'_i(t, 1)]^{(b)}, \dots, [S'_i(t, z)]^{(b)}], \quad t \in \langle 0, \infty \rangle, \quad b = 1, 2, \dots, \nu', \quad i = 1, 2, \dots, n, \quad (42)$$

with the coordinates

$$\begin{aligned} [S'_i(t, u)]^{(b)} &= P(T_i^{(b)}(u) > t | Z'(t) = z'_b) \\ &= \exp[-[\lambda'_i(u)]^{(b)} t], \\ t &\in \langle 0, \infty \rangle, \quad b = 1, 2, \dots, \nu', \quad i = 1, 2, \dots, n, \end{aligned} \quad (43)$$

and the intensities of ageing of the system components E_i , $i = 1, 2, \dots, n$, (the intensities of the system components E_i , $i = 1, 2, \dots, n$, departure from the safety state subset $\{u, u + 1, \dots, z\}$) related to operation impact, existing in (43), are given by

$$\begin{aligned} [\lambda'_i(u)]^{(b)} &= \rho_i^{(b)}(u) \cdot \lambda_i(u), \quad u = 1, 2, \dots, z, \\ b &= 1, 2, \dots, \nu', \quad i = 1, 2, \dots, n, \end{aligned} \quad (44)$$

where $\lambda_i(u)$ are the intensities of ageing of the system components E_i , $i = 1, 2, \dots, n$, (the intensities of the system components E_i , $i = 1, 2, \dots, n$, departure from the safety state subset $\{u, u + 1, \dots, z\}$) without operation impact and

$$\begin{aligned} [\rho'_i(u)]^{(b)}, \quad u &= 1, 2, \dots, z, \quad b = 1, 2, \dots, \nu', \\ i &= 1, 2, \dots, n, \end{aligned} \quad (45)$$

are the coefficients of operation impact on the system components E_i , $i = 1, 2, \dots, n$, intensities of ageing (the coefficients of operation impact on critical infrastructure components E , $i = 1, 2, \dots, n$, intensities of departure from the safety state subset $\{u, u + 1, \dots, z\}$) without operation impact, in the case of series, parallel, “ m out of n ”, consecutive “ m out of n : F” systems and respectively by

$$\begin{aligned} [S'_{ij}(t, \cdot)]^{(b)} &= [1, [S'_{ij}(t, 1)]^{(b)}, \dots, [S'_{ij}(t, z)]^{(b)}], \\ t &\in \langle 0, \infty \rangle, \quad b = 1, 2, \dots, \nu', \\ i &= 1, 2, \dots, k, \quad j = 1, 2, \dots, l_i, \end{aligned} \quad (46)$$

with the coordinates

$$\begin{aligned} [S'_{ij}(t, u)]^{(b)} &= P(T_{ij}^{(b)}(u) > t | Z'(t) = z'_b) \\ &= \exp[-[\lambda'_{ij}(u)]^{(b)} t], \quad t \in \langle 0, \infty \rangle, \\ b &= 1, 2, \dots, \nu', \quad i = 1, 2, \dots, k, \quad j = 1, 2, \dots, l_i, \end{aligned} \quad (47)$$

and the intensities of ageing of the system components E_{ij} , $i = 1, 2, \dots, k$, $j = 1, 2, \dots, l_i$, (the intensities of the system components E_{ij} , $i = 1, 2, \dots, k$, $j = 1, 2, \dots, l_i$, departure from the safety state subset $\{u, u + 1, \dots, z\}$) related to operation impact, existing in (47), are given by

$$\begin{aligned} [\lambda'_{ij}(u)]^{(b)} &= \rho_{ij}^{(b)}(u) \cdot \lambda_{ij}(u), \quad u = 1, 2, \dots, z, \\ b &= 1, 2, \dots, \nu', \quad i = 1, 2, \dots, k, \quad j = 1, 2, \dots, l_i, \end{aligned} \quad (48)$$

where $\lambda_{ij}(u)$ are the intensities of ageing of the system components E_{ij} , $i = 1, 2, \dots, k$, $j = 1, 2, \dots, l_i$, (the intensities of the system components E_{ij} , $i = 1, 2, \dots, k$, $j = 1, 2, \dots, l_i$, departure from the safety state subset $\{u, u + 1, \dots, z\}$) without operation impact and

$$\begin{aligned} [\rho'_{ij}(u)]^{(b)}, \quad u &= 1, 2, \dots, z, \quad b = 1, 2, \dots, \nu', \\ i &= 1, 2, \dots, k, \quad j = 1, 2, \dots, l_i, \end{aligned} \quad (49)$$

are the coefficients of operation impact on the system components E_{ij} , $i = 1, 2, \dots, k$, $j = 1, 2, \dots, l_i$, intensities of ageing (the coefficients of operation impact on critical infrastructure component E_{ij} , $i = 1, 2, \dots, k$, $j = 1, 2, \dots, l_i$, intensities of departure from the safety state subset $\{u, u + 1, \dots, z\}$) without operation impact,

in the case of series-parallel, parallel-series, series-“ m out of k ”, “ m_i out of l_i ”-series, series-consecutive “ m out of k : F” and consecutive “ m_i out of l_i : F”-series systems

and the system operation time θ' is large enough, then its multistate unconditional safety function is given by the vector:

i) for a series system

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \quad \text{for } t \geq 0, \quad (50)$$

where

$$\begin{aligned} \mathbf{S}'(t, u) &\cong \sum_{b=1}^{\nu'} p'_b \exp[-\sum_{i=1}^n [\lambda'_i(u)]^{(b)} t] \quad \text{for } t \geq 0, \\ u &= 1, 2, \dots, z, \end{aligned} \quad (51)$$

ii) for a parallel system

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \quad \text{for } t \geq 0, \quad (52)$$

where

$$\begin{aligned} \mathbf{S}'(t, u) &\cong 1 - \sum_{b=1}^{\nu'} p'_b \prod_{i=1}^n [1 - \exp[-[\lambda'_i(u)]^{(b)} t]] \\ &\quad \text{for } t \geq 0, \quad u = 1, 2, \dots, z; \end{aligned} \quad (53)$$

iii) for a “ m out of n ” system

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \quad \text{for } t \geq 0, \quad (54)$$

where

$$\begin{aligned} & \mathbf{S}'(t, u) \\ & \cong 1 - \sum_{b=1}^{\nu'} p'_b \sum_{\substack{r_1, r_2, \dots, r_n=0 \\ r_1+r_2+\dots+r_n \leq m-1}} \prod_{i=1}^n \exp[-r_i [\lambda'_i(u)]^{(b)} t] \\ & [1 - \exp[-[\lambda'_i(u)]^{(b)} t]]^{1-n} \text{ for } t \geq 0, u = 1, 2, \dots, z \end{aligned} \quad (55)$$

or

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \text{ for } t \geq 0, \quad (56)$$

where

$$\begin{aligned} & \mathbf{S}'(t, u) \\ & \cong \sum_{b=1}^{\nu'} p'_b \sum_{\substack{r_1, r_2, \dots, r_n=0 \\ r_1+r_2+\dots+r_n \leq \bar{m}}} \prod_{i=1}^n [1 - \exp[-[\lambda'_i(u)]^{(b)} t]]^{r_i} \\ & \exp[-(1-r_i)[\lambda'_i(u)]^{(b)} t] \text{ for } t \geq 0, \\ & u = 1, 2, \dots, z, \end{aligned} \quad (57)$$

and $\bar{m} = n - m$;

iv) for a consecutive “ m out of n : F” system

$$\mathbf{CS}'(t, \cdot) = [1, \mathbf{CS}'(t, 1), \dots, \mathbf{CS}'(t, z)] \text{ for } t \geq 0, \quad (58)$$

where

$$\begin{aligned} & \mathbf{CS}'(t, u) \cong \sum_{b=1}^{\nu'} p'_b [\mathbf{CS}'(t, u)]^{(b)} \text{ for } t \geq 0, \\ & u = 1, 2, \dots, z, \end{aligned} \quad (59)$$

and $[\mathbf{CS}'(t, u)]^{(b)}$, $t \geq 0$, $b = 1, 2, \dots, \nu'$, are given by

$$\begin{aligned} & [\mathbf{CS}'(t, u)]^{(b)} \\ & \begin{cases} 1 & \text{for } n < m, \\ 1 - \sum_{b=1}^{\nu'} q_b \prod_{i=1}^n [1 - \exp[-[\lambda'_i(u)]^{(b)} t]] & \text{for } n = m, \\ \sum_{b=1}^{\nu'} q_b [\exp[-[\lambda'_n(u)]^{(b)} t]] [\mathbf{CS}'_{n-1}(t, u)]^{(b)} \\ + \sum_{i=1}^{m-1} \exp[-[\lambda'_{n-i}(u)]^{(b)} t] [\mathbf{CS}'_{n-i-1}(t, u)]^{(b)} \\ \prod_{j=n-i+1}^n [1 - \exp[-[\lambda'_j(u)]^{(b)} t]] & \text{for } n > m, \end{cases} \\ & \text{for } t \geq 0, u = 1, 2, \dots, z; \end{aligned} \quad (60)$$

v) for a series-parallel system

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \text{ for } t \geq 0, \quad (61)$$

where

$$\begin{aligned} & \mathbf{S}'(t, u) \cong 1 - \sum_{b=1}^{\nu'} p'_b \prod_{i=1}^k [1 - \exp[-\sum_{j=1}^{l_i} [\lambda'_{ij}(u)]^{(b)} t]] \\ & \text{for } t \geq 0, u = 1, 2, \dots, z; \end{aligned} \quad (62)$$

vi) for a parallel-series system

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \text{ for } t \geq 0, \quad (63)$$

where

$$\begin{aligned} & \mathbf{S}'(t, u) \cong \sum_{b=1}^{\nu'} p'_b \prod_{i=1}^k [1 - \prod_{j=1}^{l_i} [1 - \exp[-[\lambda'_{ij}(u)]^{(b)} t]]] \\ & \text{for } t \geq 0, u = 1, 2, \dots, z; \end{aligned} \quad (64)$$

vii) for a series-“ m out of k ” system

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \text{ for } t \geq 0, \quad (65)$$

where

$$\begin{aligned} & \mathbf{S}'(t, u) \\ & \cong 1 - \sum_{b=1}^{\nu'} p'_b \sum_{\substack{r_1, r_2, \dots, r_k=0 \\ r_1+r_2+\dots+r_k \leq m-1}} \prod_{i=1}^k \prod_{j=1}^{l_i} \exp[-[\lambda'_{ij}(u)]^{(b)} t]]^{r_i} \\ & \cdot [1 - \prod_{j=1}^{l_i} \exp[-[\lambda'_{ij}(u)]^{(b)} t]]^{1-r_i} \\ & \text{for } t \geq 0, u = 1, 2, \dots, z, \end{aligned} \quad (66)$$

or

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \text{ for } t \geq 0, \quad (67)$$

where

$$\begin{aligned} & \mathbf{S}'(t, u) \\ & \cong \sum_{b=1}^{\nu'} p'_b \sum_{\substack{r_1, r_2, \dots, r_k=0 \\ r_1, r_2, \dots, r_k \leq \bar{m}}} \prod_{i=1}^k [1 - \prod_{j=1}^{l_i} \exp[-[\lambda'_{ij}(u)]^{(b)} t]]^{r_i} \\ & \cdot [\prod_{j=1}^{l_i} \exp[-[\lambda'_{ij}(u)]^{(b)} t]]^{1-r_i} \\ & \text{for } t \geq 0, \bar{m} = k - m, u = 1, 2, \dots, z; \end{aligned} \quad (68)$$

viii) for a “ m_i out of l_i ”-series system

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \text{ for } t \geq 0, \quad (69)$$

where

$$\begin{aligned} & \mathbf{S}'(t, u) \\ & \cong \sum_{b=1}^{\nu'} p'_b \prod_{i=1}^k [1 - \sum_{\substack{r_1, r_2, \dots, r_{l_i}=0 \\ r_1+r_2+\dots+r_{l_i} \leq m_i-1}} \prod_{j=1}^{l_i} \exp[-r_j [\lambda'_{ij}(u)]^{(b)} t]] \end{aligned}$$

$$\cdot [1 - \exp[-[\lambda'_{ij}(u)]^{(b)} t]]^{1-r_j}$$

for $t \geq 0, u = 1, 2, \dots, z,$ (70)

or

$$\mathbf{S}'(t, \cdot) = [1, \mathbf{S}'(t, 1), \dots, \mathbf{S}'(t, z)] \text{ for } t \geq 0, \quad (71)$$

where

$$\begin{aligned} \mathbf{S}'(t, u) &\cong \sum_{b=1}^{\nu'} p'_b \prod_{i=1}^k [\sum_{\substack{r_1, r_2, \dots, r_i=0 \\ r_1+r_2+\dots+r_i \leq \bar{m}_i}}^1 \prod_{j=1}^{l_i} [1 - \exp[-[\lambda'_{ij}(u)]^{(b)} t]]^{r_j} \\ &\cdot \exp[-(1-r_j)[\lambda'_{ij}(u)]^{(b)} t] \text{ for } t \geq 0, \bar{m}_i = l_i - m_i, \\ &i = 1, 2, \dots, k, u = 1, 2, \dots, z; \end{aligned} \quad (72)$$

ix) for a series-consecutive “ m out of k : F” system

$$\mathbf{CS}'(t, \cdot) = [1, \mathbf{CS}'(t, 1), \dots, \mathbf{CS}'(t, z)] \text{ for } t \geq 0, \quad (73)$$

where

$$\begin{aligned} \mathbf{CS}'(t, u) &\cong \sum_{b=1}^{\nu'} p'_b [\mathbf{CS}'(t, u)]^{(b)} \text{ for } t \geq 0, \\ &u = 1, 2, \dots, z, \end{aligned} \quad (74)$$

and $[\mathbf{CS}'(t, u)]^{(b)}, b = 1, 2, \dots, \nu'$, are given by

$$\begin{aligned} &[\mathbf{CS}'(t, u)]^{(b)} \\ &= \begin{cases} 1 & \text{for } k < m, \\ 1 - \prod_{i=1}^k [1 - \exp[-\sum_{j=1}^{l_i} \lambda'_{ij}(u)t]] & \text{for } k = m, \\ \exp[-\sum_{j=1}^{l_k} [\lambda'_{kj}(u)]^{(b)} t] [\mathbf{CS}'_{k-1; l_1, l_2, \dots, l_k}(t, u)]^{(b)} \\ + \sum_{j=1}^{m-1} [\exp[-\sum_{v=1}^{l_{k-j}} [\lambda'_{k-jv}(u)]^{(b)} t]] \\ [\mathbf{CS}'_{k-j-1; l_1, l_2, \dots, l_k}(t, u)]^{(b)} \\ \cdot \prod_{i=k-j+1}^k [1 - \exp[-\sum_{v=1}^{l_i} [\lambda'_{iv}(u)]^{(b)} t]] & \text{for } k > m, \end{cases} \\ &\text{for } t \geq 0, u = 1, 2, \dots, z; \end{aligned} \quad (75)$$

x) for a consecutive “ m_i out of l_i : F”-series system

$$\mathbf{CS}'(t, \cdot) = [1, \mathbf{CS}'(t, 1), \dots, \mathbf{CS}'(t, z)] \text{ for } t \geq 0, \quad (76)$$

where

$$\begin{aligned} \mathbf{CS}'(t, u) &\cong \sum_{b=1}^{\nu'} p'_b \prod_{i=1}^k [\mathbf{CS}'(t, u)]^{(b)} \text{ for } t \geq 0, \\ &u = 1, 2, \dots, z, \end{aligned} \quad (77)$$

and $[\mathbf{CS}'(t, u)]^{(b)}, i = 1, 2, \dots, k, b = 1, 2, \dots, \nu'$, are given by

$$\begin{aligned} &[\mathbf{CS}'(t, u)]^{(b)} \\ &= \begin{cases} 1 & \text{for } l_i < m_i, \\ 1 - \prod_{j=1}^{l_i} [1 - \exp[-[\lambda'_{ij}(u)]^{(b)} t]] & \text{for } l_i = m_i, \\ \exp[-[\lambda'_{il_i}(u)]^{(b)} t] [\mathbf{CS}'_{i, l_i-1}(t, u)]^{(b)} \\ + \sum_{j=1}^{m_i-1} \exp[-[\lambda'_{il_i-j}(u)]^{(b)} t] [\mathbf{CS}'_{i, l_i-j-1}(t, u)]^{(b)} \\ \cdot \prod_{v=l_i-j+1}^{l_i} [1 - \exp[-[\lambda'_{iv}(u)]^{(b)} t]] & \text{for } l_i > m_i, \end{cases} \\ &\text{for } t \geq 0, u = 1, 2, \dots, z. \end{aligned} \quad (78)$$

Remark 1

The formulae for the safety functions stated in *Proposition 1* are valid for the considered systems under the assumption that they do not change their structure shapes at different operation states $z'_b, b = 1, 2, \dots, \nu'$. This limitation can be simply omitted by the replacement in these formulae the system's structure shape constant parameters n, m, k, m_i, l_i , respectively by their changing at different operation states $z'_b, b = 1, 2, \dots, \nu'$, equivalent structure shape parameters $n^{(b)}, m^{(b)}, k^{(b)}, m_i^{(b)}, l_i^{(b)}, b = 1, 2, \dots, \nu'$.

For the exponential complex technical systems, considered in *Proposition 1*, we determine the mean values $\mu'(u)$ and the standard deviations $\sigma'(u)$ of the unconditional lifetimes of the system in the safety state subsets $\{u, u+1, \dots, z\}, u = 1, 2, \dots, z$, the mean values $\bar{\mu}'(u)$ of the unconditional lifetimes of the system in the particular safety states $u, u = 1, 2, \dots, z$, the system risk function $r'(t)$ and the moment τ' when the system risk function exceeds a permitted level δ respectively defined by (20)-(25), after substituting for $\mathbf{S}'(t, u), u = 1, 2, \dots, z$, the coordinates of the unconditional safety functions given respectively by (50)-(78).

5. Conclusions

The integrated general model of complex systems' safety, linking their safety models and their operation processes models and considering variable at different operation states and the influence of the operating environment threats on their safety structures and their components safety parameters is constructed. The material given in this report delivers the procedures and algorithms that allow to find the main an practically important safety characteristics

of the complex technical systems at the variable operation conditions including operating environment threats. Next the results are applied to the safety evaluation of the port oil piping transportation system and the maritime ferry technical system. The predicted safety characteristics of these exemplary critical infrastructures operating at the variable conditions are different from those determined for these systems operating at constant conditions [Kołowrocki, Soszyńska-Budny, 2011] and without of considering the impacts of operating environment threats on their safety. This fact justifies the sensibility of considering real systems at the variable operation conditions that is appearing out in a natural way from practice. This approach, upon the sufficient accuracy of the critical infrastructures' operation processes and the critical infrastructures' components safety parameters identification, makes their safety prediction much more precise.

Acknowledgements



The paper presents the results developed in the scope of the EU-CIRCLE project titled “A pan – European framework for strengthening Critical Infrastructure resilience to climate change” that has received funding from the European Union’s Horizon 2020 research and innovation programme under grant agreement No 653824. <http://www.eu-circle.eu/>

References

EU-CIRCLE Report D3.3-GMU3, Modelling inside and outside dependences influence on safety of complex multistate ageing systems (critical infrastructures) – Integrated Model of Critical Infrastructure Safety (IMCIS) related to its operation process including operating environment threats (with other critical infrastructures influence, without climate-weather change influence), 2016

EU-CIRCLE Report D3.3-GMU3-IMCIS Model1, Integrated Model of Critical Infrastructure Safety (IMCIS) Related to Its Operation Process (OP), Including Operating Environment Threats (OET), IMCIS Model 1, 2016

Ferreira F., Pacheco A., Comparison of level-crossing times for Markov and semi-Markov processes. *Statistics and Probability Letters*, Vol. 7, No 2, 151-157, 2007

Glynn P.W., Haas P.J., Laws of large numbers and functional central limit theorems for generalized

semi-Markov processes. *Stochastic Models*, Vol. 22, No 2, 201-231, 2006

Grabski F., *Semi-Markov Processes: Application in System Reliability and Maintenance*, Amsterdam, Boston, Heidelberg, London, New York, Oxford, Paris, San Diego, San Francisco, Singapore, Sidney, Tokyo, Elsevier, 2014

Kołowrocki K., *Reliability of Large and Complex Systems*, Amsterdam, Boston, Heidelberg, London, New York, Oxford, Paris, San Diego, San Francisco, Singapore, Sidney, Tokyo, Elsevier, 2014

Kołowrocki K., Soszyńska-Budny J., *Reliability and Safety of Complex Technical Systems and Processes: Modeling - Identification - Prediction - Optimization*, London, Dordrecht, Heildeberg, New York, Springer, 2011

Limnios N., Oprisan G., *Semi-Markov Processes and Reliability*. Birkhauser, Boston, 2005

Xue J., On multi-state system analysis, *IEEE Trans on Reliab.* 34, 329-337, 1985

Xue J., Yang K., Dynamic reliability analysis of coherent multi-state systems, *IEEE Trans on Reliab.* 4(44), 683-688, 1995a

Xue J., Yang K., Symmetric relations in multi-state systems, *IEEE Trans on Reliab* 4(44), 689-693, 1995