

# Assessing the impact of climate change on discharge in the Horyn River basin by analyzing precipitation and temperature data

Oleksandr Lobodzynskyi, Yevheniia Vasylenko, Olha Koshkina, Yurii Nabyvanets

Ukrainian Hydrometeorological Institute, State Emergency Service of Ukraine, National Academy of Sciences of Ukraine

## Abstract

It is important to investigate the hydrological consequences of current climate change. Hydrological responses to climate warming and wetter conditions include changes in discharge (frequency, amplitude, and volume). This paper describes current climate change and its impact on hydrological flow within the Horyn River basin. Daily air temperature and precipitation data obtained from the 17 meteorological stations located in and nearby the Horyn River basin, in combination with hydrological data (such as daily water discharges obtained from 9 water gauges), were used for the analysis of climate variability and its hydrological consequences. Analyses of meteorological variables and water discharges are crucial for the assessment of long-term changes in the river regime. Thiessen polygons were used to determine the area of influence of assigned specific meteorological stations, which affect the river's catchments within the Horyn River basin. As a result of the trend analysis, it was observed that discharge within the Horyn River basin decreased over time. These results were congruent with the trends of precipitation data and air temperature data of the stations determined by the Thiessen polygons and basin boundaries. To understand current changes in the daily flow in the basin, changes in air temperature and precipitation for the period 1991-2020 were compared with the period of the climatic norm (1961-1990). A similar analysis was done for daily water discharges. Increasing air temperature and decreasing precipitation in the current period led to a significant decrease in discharges in the Horyn River basin, especially during the spring flood period.

## Keywords

Climate change, precipitation, hydrograph, air temperature, Thiessen polygons, Horyn River basin, water discharges.

Submitted 23 January 2023, revised 12 April 2023, accepted 17 April 2023

DOI: 10.26491/mhwm/163286

## 1. Introduction

Climate change has multiple environmental and economic effects; among them are impacts on water resources and, accordingly, the water supply for drinking and economic needs (agriculture, industries, etc.). By altering major aspects of hydrological regimes, climate change will pose additional challenges to water management. The warming climate is likely to lead to diminished water resources, thus making it difficult to maintain good ecological status in surface waters as prescribed by the Water Framework Directive.

Identifying the variability in water-flow features under current climatic conditions is necessary for (1) solving many scientific and practical issues of rational water resources use; (2) increasing the operational efficiency of water management facilities; and (3) monitoring polluted regions of Ukraine. Therefore, research into the dynamics of river discharges in different regions under the impact of climate change is one of the most urgent tasks for Ukrainian hydrologists.

The first scientific publication to address changes in the hydrological regime of waterbodies under the influence of climate change appeared in the 1980s (Nemec, Schaake 1982; Bultot et al. 1988; Fiering, Rogers

1989; Peterson, Keller 1990). Today, research into climate change impacts on water resources and stream-flow regimes is the focus of many scientists from various countries around the world. Leaders in the quantity of published scientific works are scientists from the USA and Canada (Schindler 2001; Whitfield 2001; Javelle et al. 2002; Barnett et al. 2004; Diemann, Eltahir 2005; Hodgkins, Dudley 2006; Schnorbus et al. 2022). They have considered the impacts of climate change on water balance characteristics, water resources, and discharge within individual river basins and countries as a whole, including the response of flow fluctuations to climate change scenarios.

This area of research is also well-represented by scientists from Europe, in particular from France (Kastendeuch 2007; Planton, Terrey 2007), Germany (Middelkoop et al. 2001; Menzel et al. 2002), Poland (Kuchar et al. 2014; Malinowski, Skoczko 2018), Hungary (Nováky, Bálint 2011), Czech Republic (Řenzničková et al. 2007), Slovakia (Kohnová et al. 2019), Spain (Brunet et al. 2007), Italy (Confortola et al. 2013), and Scandinavian countries (Rodhe 1981; Krasovskaia, Gottschalk 2002; Andréasson et al. 2004; Phil Graham et al. 2007). Additional leading roles in research of hydrological characteristic changes under the influence of climate fluctuation are played by scientists from China, Japan, India, and other Asian countries (Islam et al. 2005; Devkota, Gyawali 2015; Nazari et al. 2016; Liu, Xu 2017; Dahri et al. 2021; Khatri, Pandey 2021; Al-Munqedhi et al. 2022; Grover et al. 2022; Xiang et al. 2022).

Unfortunately, in contrast to other countries, studies of the current hydrological regimes of rivers in Ukraine under the influence of climate change have not been conducted properly. The studies are pretty much incomplete and unsystematic; in most cases, only general characteristics of changes in selected hydrological parameters have been recorded.

In Ukraine, research into climate change impacts on the hydrological regimes of Ukrainian rivers is conducted by the scientists of National Taras Shevchenko University (Strutynska 2008; Chornomoretz, Hrebin 2010; Hrebin 2010). The probable changes in water resources in Ukraine under global warming conditions have been estimated by scientists of Odesa State Environmental University E. Hopchenko and N. Loboda (Loboda 2005; Hopchenko et al. 2010).

In the present study, the Horyn River basin was selected to represent the current changes in discharge (daily discharges) as well as changes in meteorological factors that influence discharge, such as air temperature and precipitation.

## **2. The study area**

The Horyn River is located in the Pripyat River sub-basin of the Dnipro River Basin District; it is the largest right-bank tributary of the Pripyat River, passing through the territories of Ukraine and Belarus Republic (Fig. 1). The Horyn River is 659 km long, with a drainage basin of 27,791 km<sup>2</sup>. The maximum width is 80 m, and the maximum depth is 16 m. The source of the Horyn River is in the Ternopil Oblast of Ukraine, south of the city of Kremenets, and north of the administrative center of Ternopil Oblast, city of Ternopil. From there, the river flows north in a series of s-shaped bends through the Ukrainian oblasts of

Khmelnyskyi and Rivne. Then the river flows northeast into the Belarusian oblast of Brest, where it finally confluences with the Pripyat River.

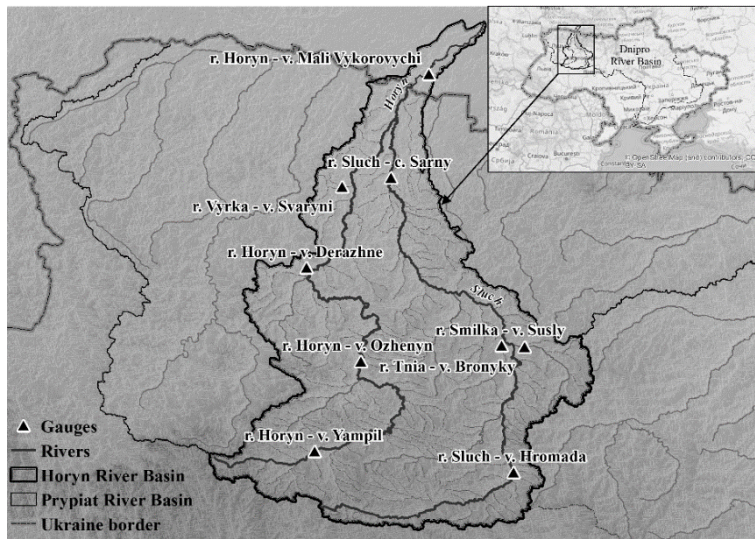


Fig. 1. Location of the Horyn River basin and associated water gauges.

The source of the Horyn River is within the Kremenets Upland: the river flows at first through the Volyn Upland, mostly in a narrow valley with high, steep slopes; later on, the river flows through the Polisia Lowland in an extensive swampy floodplain, marked by channels and old riverbeds. Finally, on the lower section, it passes through the Pinsk swamps.

The main tributaries of the Horyn River are the rivers Sluch (catchment area 13,800 km<sup>2</sup>), Vilia (catchment area 1,815 km<sup>2</sup>), Stubla (catchment area 1,350 km<sup>2</sup>), and Ustya (catchment area 762 km<sup>2</sup>).

The river is nourished mainly by snow but with significant percentages of rain and groundwater.

Intra-annual flow is characterized by high spring floods, a summer low-flow period interrupted by short-term rain-induced floods, with rising water levels in autumn and winter.

The upper reaches of the river are used as a source of hydropower and for fishing. In general, the water resources of the basin are used for industrial, household, and agricultural water supply. The Horyn River is regulated by numerous reservoirs and ponds.

The Khmelnytska Nuclear Power Plant (NPP) is located in the upper section of the Horyn River. The NPP utilizes water from the Horyn River for cooling and reduces peak flood values, leaving only minimal runoff in the channel (Pripyat Basin Water Management Authority 2022).

### 3. Methodology and data

Data from nine water gauges (one of them is in Belarus) with 60 years of observations have been used to study changes in the water regime in the rivers of the Horyn River basin. Also, data from 17 meteorological stations (two in Belarus) has been used to study changes in air temperature and precipitation. The duration of meteorological observations is 60 years.

The location of water gauges and meteorological stations in the Horyn River catchment is shown in Figures 1 and 2.

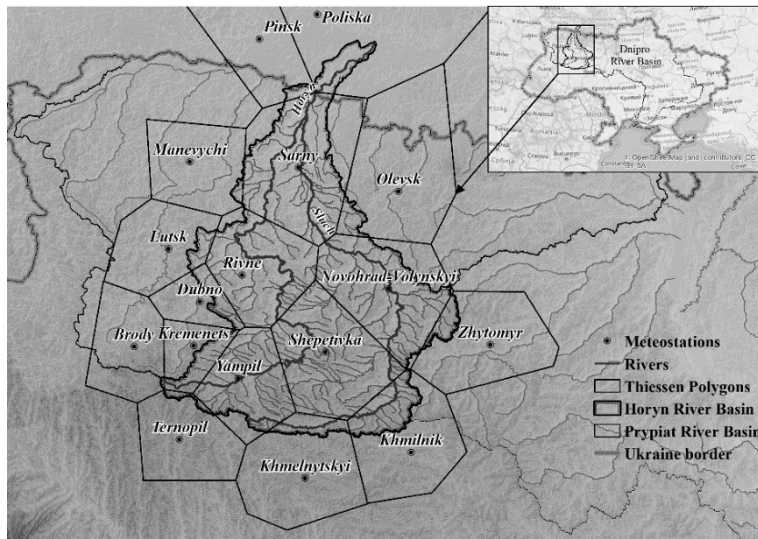


Fig. 2. Thiessen Polygons and location of the meteorological stations.

To analyze the climate change impact on the water regime, influence areas in the river's catchments (i.e., the areas assigned to each specific meteorological station) were delineated within the Horyn River basin, assessed by using ArcGIS.

The first step in analyzing climate change impacts on the water regime is to estimate the meteorological characteristics (precipitation, temperature, etc.) and their distribution within the river's catchments. The network of meteorological stations provides values of climatic characteristics at specific points, so it was necessary to extrapolate the point values of meteorological parameters (daily precipitation and air temperature) over areas within specific catchments. Methods for converting point meteorological values at different meteorological stations into an average value over a catchment include arithmetical means, Thiessen polygons, the Isohyetal method, etc.

The Thiessen polygon method is a commonly used method for weighting observations from meteorological stations according to the area. This method is also called the weighted mean method and is considered the most important in engineering practice. The Thiessen method cannot account for topographical distributions of the parameters, but because the Horyn River basin lacks significant elevation differences, this method can be used.

The Thiessen polygons established the influence areas of specific meteorological stations relative to a separate catchment (Voronoi 1908; Thiessen 1911; Brassel, Reif 1979; Boots 1980, 1986). The weights of the meteorological stations are computed by their relative areas, which are estimated with the Thiessen polygon network. The polygons are formed by the perpendicular bisectors of the lines joining nearby stations. The area of each polygon is used to weigh the meteorological values of the station in the center of the polygon.

According to this method, the weight coefficients ( $k$ ) are defined in order to obtain average precipitation and air temperature values for the studied catchments attributed to specific water gauges.

ArcGIS tools were used to divide the catchment into separate influence areas (weights) of each meteorological station within the gauged catchments (ArcToolbox > Analysis Tools > Proximity > Create Thiessen Polygons). The influence areas of each meteorological station on the water gauges within the Thiessen polygon were calculated according to the formula:

$$k = f_i/F \quad (1)$$

where,  $f_i$  = the influence area of the meteorological station that was calculated within the catchment area of the water gauges;  $F$  = the total catchment area of the water gauge.

The sum of the weight coefficients for each water gauge catchment should be equal to 1 (Table 1).

Table 1. The weight coefficients of the meteorological stations for water gauge catchments within the Horyn River basin.

Meteorological stations	Water gauges								
	r. Horyn v. Yampil	r. Horyn v. Ozhenyn	r. Horyn v. Derazhne	r. Horyn v. Mali Vykorovychi	r. Vyrka v. Svaryni	r. Sluch v. Hromada	r. Sluch c. Sarny	r. Tria v. Bronyky	r. Smilka v. Susly
Brody	0.010	0.002	0.001	0.001					
Dubno		0.029	0.054	0.019					
Zhytomyr				0.014			0.027	0.363	
Kremenets	0.254	0.118	0.075	0.026					
Lutsk			0.032	0.011					
Manevychi				0.003	0.028				
Novohrad-Volynskyi				0.176			0.354	0.637	0.533
Olevsk				0.013			0.026		
Rivne		0.055	0.326	0.159			0.026		
Sarny				0.187	0.972		0.130		
Ternopil	0.086	0.021	0.013	0.004					
Khmelnyskyi				0.021		0.230	0.042		
Khmilnik				0.046		0.396	0.092		
Shepetivka		0.296	0.196	0.203		0.239	0.272		0.467
Yampil	0.651	0.480	0.303	0.120		0.135	0.031		
Sum	1	1	1	1	1	1	1	1	1

The next step was to calculate the amount of precipitation and air temperature based on the weighting coefficients for each water gauge catchment within the Horyn River basin, according to the formula:

$$P = P_1 \cdot k_1 + P_2 \cdot k_2 + \dots + P_n \cdot k_n \quad (2)$$

where:  $P_1, P_2 \dots P_n$  = the precipitation amount or air temperature at the separate observation points (mm or °C);  $k_1, k_2 \dots k_n$  = values of the weighting coefficients at the separate observation point.

To assess the impact of climate change on discharge in the Horyn River basin, the residual mass curves were used to reveal regularities in the cyclical fluctuations of the runoff from the catchment. Correspondingly, with combined chronological graphs, the trend of changes in the long-term dynamics was identified. Trend analysis is one of the most commonly used tools for tracing changes in hydrological time series, such as water discharges, and for meteorological data, such as precipitation and air temperature.

Residual mass curves were used for identifying patterns in the cyclical fluctuations of the hydrometeorological characteristics. For comparing results, the graphs of the long-term dynamics (combined chronological graphs) and the residual mass curves were created in the modulus coefficients ( $K_i$ ) according to the following equation:

$$K_i = A_i / \bar{A} \quad (3)$$

where:  $A_i$  – the value of  $i$ -element of the series;  $\bar{A}$  – the arithmetical mean of the series (Koshkina, Gorbachova 2013).

To exclude scale effects, the residual mass curves were expressed as normalized deviations for comparison. The expression for the residual mass curves in modular coefficients assumes the following form:

$$\frac{\sum_1^n (K_i - 1)}{C_v} = f(j) \quad (4)$$

where:  $f(j)$  – the ordinates for these curves;  $K_i$  – the modulus coefficients;  $C_v$  – the coefficient of variation.

The coefficient of variation ( $C_v$ ) is a statistical measure of the dispersion of data points in a data series around the mean. The coefficient of variation represents the ratio of the standard deviation to the mean, and it is a useful statistic for comparing the degree of variation from one data series to another.  $C_v$  was calculated according to the following equation:

$$C_v = \sqrt{\frac{\sum_1^n (K_i - 1)^2}{n}} \quad (5)$$

where  $n$  = the number of members in the series. s

Therefore, the residual mass curve represents the cumulative sum of the modular coefficients' deviations from the mean annual values of the series for each  $A_i$  year.

The period for which the integral curve section slopes upward with respect to the horizontal line corresponds to the positive phase (increasing tendency) of fluctuations in the hydrometeorological characteristics. The period for which the integral curve section slopes downward with respect to the horizontal line corresponds to the negative phase (decreasing tendency) (Melnyk, Loboda 2020).

To identify changes in daily water discharges, air temperature, and precipitation in the Horyn River basin caused by climate change, two periods were selected: 1961-1990 and 1991-2020. The period from 1961 to 1990 has been adopted as a standard reference period for long-term climate change assessments, as recommended by WMO (WMO 2017).

#### 4. Results

The residual mass curves and combined chronological graphs of runoff fluctuations at the water gauges of the Horyn River basin for the 1961-2020 period were constructed. The analysis of residual mass curves showed the synchronicity of discharge fluctuations at all water gauges. The low water phase has been observed since the 2000s at all water gauges. The trend line in the combined chronological graphs also indicates a decrease in discharge in the basin in the current period (Fig. 3).

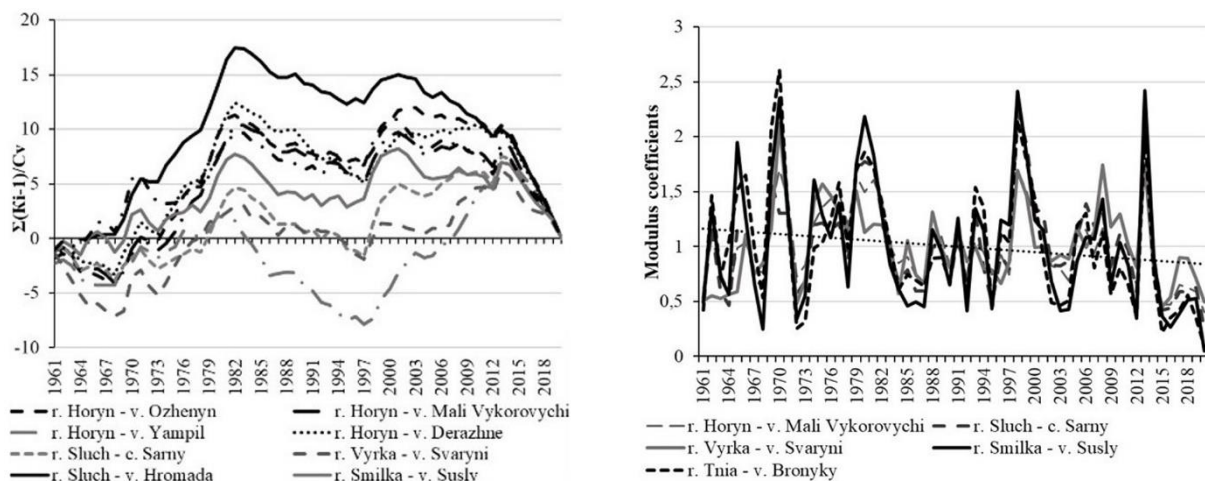


Fig. 3. The residual mass curves and the combined chronological graphs of the mean annual water discharges at water gauges in the Horyn River basin.

The decrease in air temperature can be clearly traced through 1988 according to the residual mass curves of long-term air temperature fluctuations; the current warming period is apparent, beginning in 1998.

The averaged combined chronological graph of air temperature fluctuations is characterized by an upward trend in the Horyn River basin (Fig. 4).

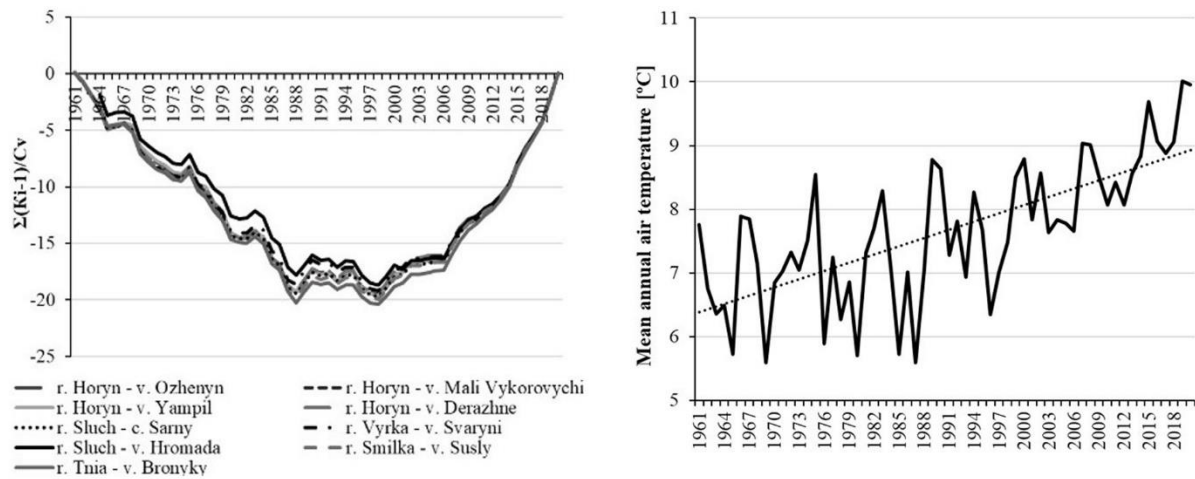


Fig. 4. The residual mass curves and the combined chronological graphs of the mean annual air temperature at water gauges in the Horyn River basin.

The analysis of long-term fluctuations of the annual precipitation showed that they are synchronous. Thus, there was an increase in precipitation before the 1980s, but precipitation has been decreasing since 2013 within the basin. Short-term phases of decrease or increase of precipitation with small-amplitude fluctuations have been observed in the Horyn River basin during the period of the 1980s-2000s. This conclusion is proved by the pattern in precipitation absolute values on the averaged combined chronological graph (Fig. 5).

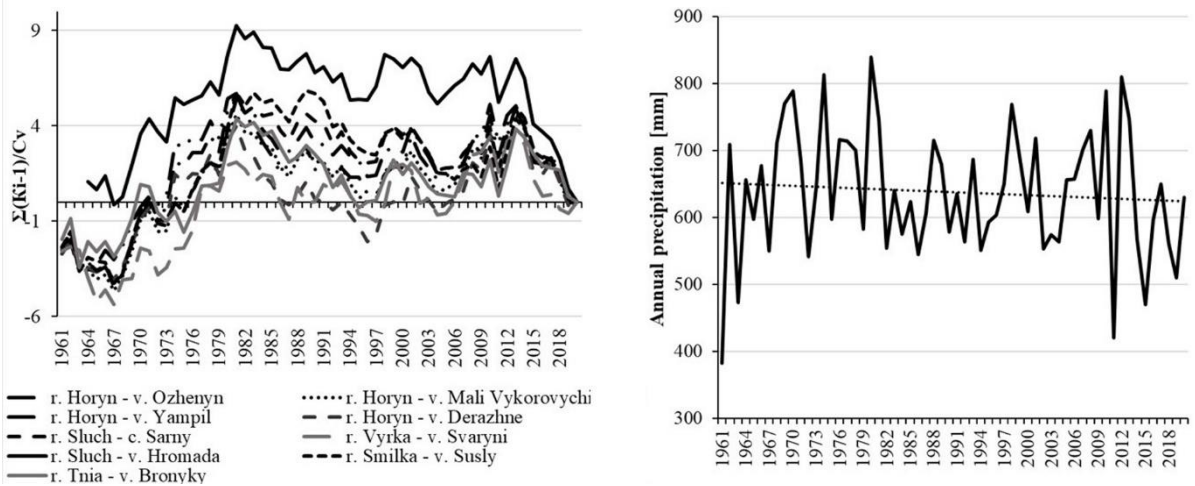


Fig. 5. The residual mass curves and combined chronological graphs of the annual precipitation at water gauges in the Horyn River basin.

The complex residual mass curves were developed to show the dependence of discharge changes (mean annual water discharges) on meteorological factors (mean annual air temperature and annual precipitation) (Fig. 6). The graphs clearly show the synphase discharge and precipitation fluctuations, as well as their asynphase to fluctuations of the air temperature. Such trends were observed in all water gauges within the Horyn River basin.



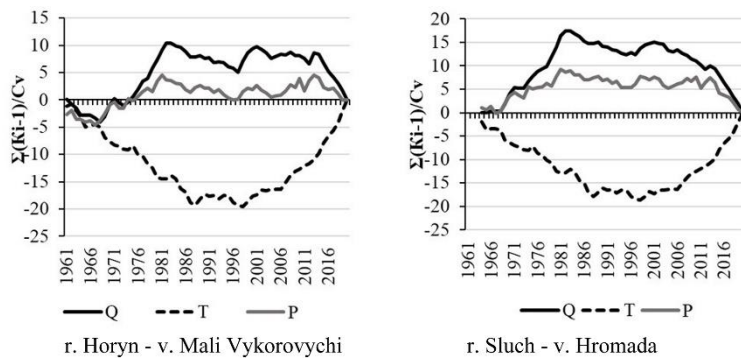


Fig. 6. The combined residual mass curves of the mean annual water discharges (Q), the mean annual air temperature (T), and the annual precipitation (P) at water gauges in the Horyn River basin.

Combined graphs of the long-term mean monthly air temperature and precipitation and averaged hydrographs of the mean daily water discharges for two periods for all nine water gauges in the Horyn River basin were plotted to determine the changes in the discharge in the current period (1991-2020) in comparison with the period of the climatic norm (1961-1990) using precipitation and temperature analysis (Fig. 7).

### Discharge

The analysis of discharge hydrographs for the periods 1961-1990 and 1991-2020 showed that flows have significantly decreased in the current period in the Horyn River basin (Fig. 7). Such changes are especially observed in the spring period, when the shape of the discharge hydrographs changed toward a flatter profile, without such high peak water discharges as in the period of the climatic norm. Thus, water discharges in the Horyn River basin decreased on average by 21% in spring, 15% in summer, and 13% in autumn. The most significant decrease in discharge compared to the period of climatic norm was observed in April, when it decreased on average by 30% within the basin. March and May are characterized by an average decrease in water discharges of 14%. The largest decrease in water content in the summer period occurred in July (by 22%). As for the autumn season, the largest decrease in water runoff (by 17%) in the Horyn River basin was observed in September and the least (by 8%) in October. In contrast to other seasons, water discharges in the winter period increased by an average of 8% within the basin. However, such changes are not observed throughout the season. Thus, the water discharges decreased by 12% in December, whereas the discharge in January and February increased by 10% and 24% compared to the period of the climatic norm (Fig. 7).

### Precipitation

A decrease of precipitation by 8-9% was noted in winter, spring, and summer from 1991 to 2020 in the Horyn River basin (Fig. 7). Thus, precipitation in the winter period mostly decreased in January (by 14%), and the least in February (by 5%). Spring precipitation decreased by 27% on average in April in the Horyn River basin and increased by 11% in March. In summer, there is also less precipitation in the basin compared to the climatic norm. The largest changes were in June, when precipitation in the current period de-

creased by 12%, and the smallest changes were observed in July (by 6%). Precipitation increased in autumn by 4% compared to the climatic norm. For the autumn months, the greatest increase in precipitation was in October (by 6%), while the smallest was in September (by 2%).

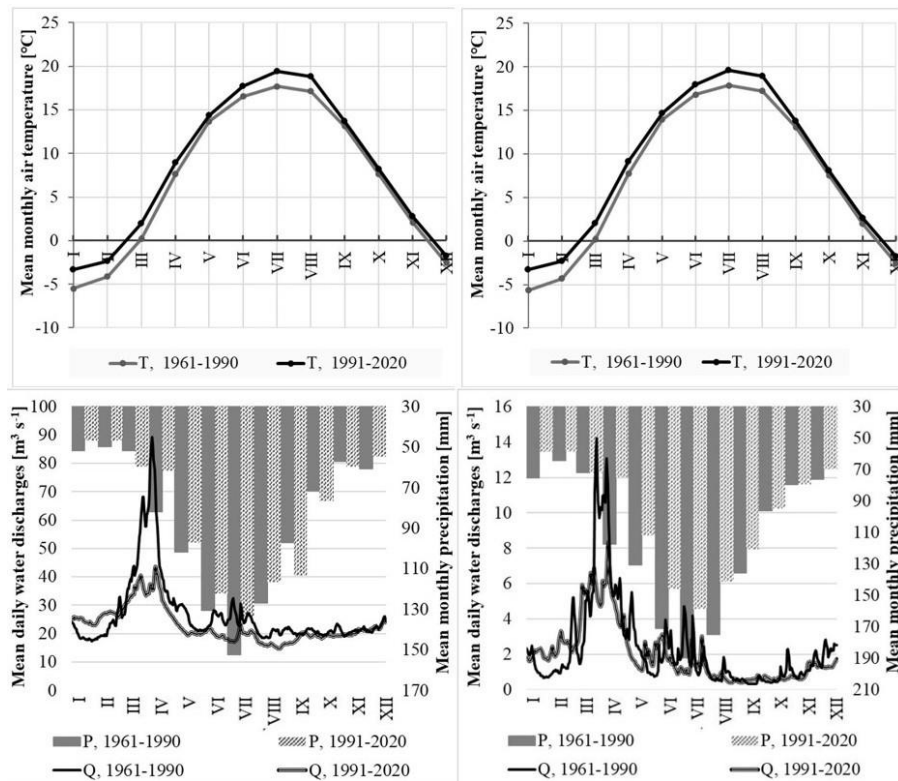


Fig. 7. Combined graphs of long-term mean monthly air temperature (T) and precipitation (P) and mean annual daily discharge (Q) hydrographs for two periods (1961-1990 and 1991-2020) at water gauges in the Horyn River basin.

### Air temperature

Air temperature has been increasing throughout the year during the current period, ranging from 0.6°C (autumn) to 1.6°C (winter). For the study area, January has experienced the greatest warming in the current period (by 2.3°C), while October has warmed the least (by 0.5°C). The greatest temperature increase in spring and summer (by 1.8°C) was observed in March and July (Fig. 7).

In summary, within the Horyn River basin, the discharge decreased by 13%; the precipitation by 6%; and the annual average air temperature increased by 1.3°C in comparison with the WMO climatic norm (1961-1990).

The analysis of combined graphs of air temperature and precipitation and discharge hydrographs in rivers of the Horyn River basin has shown that the water discharges of spring floods significantly decreased with the simultaneous increase of water discharges in the winter low-water period over the past thirty years. We assume that such a decrease in the spring flood in the Horyn River basin could be explained by the increasing air temperature throughout the basin, especially during the winter period. This led to decreases in

the soil freezing depth, causing, in combination with frequent thaws in winter, decreases in water equivalents of the snow cover. Our findings are supported by other studies (Hrebin, Vasylenko 2012).

Despite the precipitation increases in the autumn period, the decrease of discharge in this period probably can be explained by the air temperature increasing, which leads to increased evaporation from the water surface and increased infiltration processes in autumn.

The discharge decrease in summer, as observed in the current period (1991-2020) in the Horyn River basin, is attributable to increasing air temperature and a decrease in the precipitation that forms rain floods in this period.

## 5. Conclusion

The analysis of daily air temperature and precipitation reflects the negative impact of climate change on the discharge in the Horyn River basin over the past 30 years. Thus, since the 2000s, there has been a transition from the high- to low-water phase of the hydrological cycle for all rivers of the basin, which continues to the present.

Since the end of the 1990s, the air temperature increase was noted at all water gauges of the Horyn River basin. Since the 2010s, there has been a clear decrease in precipitation in the basin.

Despite the fact that over the past 30 years, precipitation has increased in March, the flow of the spring period has decreased by almost half. This phenomenon can be attributed to increasing air temperature in the winter period, frequent thaws, and, consequently, to the decrease in the water equivalent of snow cover, which plays a major role in nourishment of the rivers of the basin and forms the greater part of the annual runoff during the spring flood period. On the other hand, these factors have led to increasing discharge during the winter low-water period.

The influence of climatic factors on the water runoff of the summer and autumn periods also caused decreased water storage during these seasons in the current period.

These findings should be useful for the rational management and appropriate use of water resources under climate change conditions in the Horyn River basin, as well as for updating the regulations of the Khmelnytska NPP exploitation, which is located within the studied basin. The approaches used in this paper can be applied to the study of other river basins with similar conditions of flow formation.

## References

- Al-Munqedhi B.M., El-Sheikh M.A., Alfarhan A.H., Alkahtani A.M., Arif I.A., Rajagopal R., Alharth S.T., 2022, Climate change and hydrological regime in arid lands: Impacts of dams on the plant diversity, vegetation structure and soil in Saudi Arabia, *Saudi Journal of Biological Sciences*, 29 (5), 3194-3206, DOI: 10.1016/j.sjbs.2022.01.043.
- Andréasson J., Bergström S., Carlsson B., Phil Graham L., Lindström G., 2004, Hydrological change – climate change: impact simulations for Sweden, *AMBIO: A Journal of the Human Environment*, 33 (4), 228-234, DOI: 10.1579/0044-7447-33.4.228.
- Barnett T., Malone R., Pennell W., 2004, The effects of climate change on water resources in the west: introduction and overview, *Climate Change*, 62 (1-3), 1-11.

- Boots B.N., 1980, Weighting Thiessen polygons, *Economic Geography*, 56 (3), 248-259, DOI: 10.2307/142716.
- Boots B.N., 1986, Voronoi (Thiessen) Polygons, Geo Books, Norwich, UK, 51 pp.
- Brassel K.E., Reif D., 1979, A procedure to generate Thiessen polygons, *Geographical Analysis*, 11 (3), 289-303, DOI: 10.1111/j.1538-4632.1979.tb00695.x.
- Brunet M., Jones P., Sigro J., Saladie O., Aguilar E., Moberg A., Della-Marta P.M., Lister D., Walther A., Lopez D., 2007, Temporal and spatial temperature variability and change over Spain during 1850-2005, *Journal of Geophysical Research: Atmospheres*, 112 (D12), DOI: 10.1029/2006JD008249.
- Bultot F., Coppens A., Dupriez A., Gellens D., Meulenberghs F., 1988, Repercussions of a CO<sub>2</sub> doubling on the water cycle and on the water balance. A case study for Belgium, *Journal of Hydrology*, 99 (3-4), 45-56, DOI: 10.1016/0022-1694(88)90057-1.
- Chornomoretz Yu.O., Hrebin V.V., 2010, Intra yearly distribution of individual elements of the water balance of the Desna River Basin (within Ukraine and their long-term fluctuations), *Hydrology, Hydrochemistry and Hydroecology*, 18, 98-106, (in Ukrainian).
- Confortola G., Soncini A., Bocchiola D., 2013, Climate change will affect hydrological regimes in the Alps. A case study in Italy, *Journal of Alpine Research*, 101-3, DOI: 10.4000/rga.2176.
- Dahri Z.H., Ludwig F., Moors E., Ahmad S., Ahmad B., Ahmad S., Riaz M., Kabat P., 2021, Climate change and hydrological regime of the high-altitude Indus basin under extreme climate scenarios, *Science of the Total Environment*, 768, DOI: 10.1016/j.scitotenv.2020.144467.
- Devkota L.P., Gyawali D.R., 2015, Impacts of climate change on hydrological regime and water resources management of the Koshi River Basin, Nepal, *Journal of Hydrology: Regional Studies*, 4, 502-515, DOI: 10.1016/j.ejrh.2015.06.023.
- Diemann J., Eltahir E., 2005, Sensitivity of regional hydrology to climate changes, with application to the Illinois River basin, *Water Resources Research*, 41 (7), DOI: 10.1029/2004WR003893.
- Fiering M., Rogers P., 1989, Climate change and water resources planning under uncertainty, U.S. Army Engineer Institute for Water Resources, Fort Belvoir, VA.
- Grover S., Tayal S., Sharma R., Beldring S., 2022, Effect of changes in climate variables on hydrological regime of Chenab basin, western Himalaya, *Journal of Water and Climate Change*, 13 (1), 357-371, DOI: 10.2166/wcc.2021.003.
- Hodgkins G.A., Dudley R.W., 2006, Changes in the timing of winter-spring stream flows in eastern North America, 1913-2002, *Geophysical Research Letters*, 33 (6), DOI 10.1029/2005GL025593.
- Hopchenko E.D., Ovcharuk V.A., Shakirzanova J.R., 2010, The researches of the influence of modern climate changes on the characteristics of maximum spring flood runoff in the Prypiat River Basin, *Hydrology, Hydrochemistry and Hydroecology*, 3 (20), 50-59, (in Ukrainian).
- Hrebin V.V., 2010, The modern water regime of rivers in Ukraine (landscape- hydrologic analysis), Kyiv: Nika-Centr, 316 pp., (in Ukrainian).
- Hrebin V.V., Vasylenko E.V., 2012, The analysis of current changes of the spring flood forming factors on the rivers in the Prypiat river basin (within Ukraine), *Physical Geography and Geomorphology*, 2 (66), 161-167.
- Islam M.S., Aramaki T., Hanaki K., 2005, Development and application of an integrated water balance model to study the sensitivity of the Tokyo metropolitan area water availability scenario to climatic changes, *Water Resources Management*, 19 (4), 423-445, DOI: 10.1007/s11269-005-3277-1.
- Javelle P., Taha Ouarda B.M.J., Bobée B., 2002, Spring flood analysis using the flood-duration-frequency approach: application to the provinces of Quebec and Ontario, Canada, *Hydrological Processes*, 17 (18), 3717-3736, DOI: 10.1002/hyp.1349.
- Kastendeuch P., 2007, Pressure gradient force, atmospheric circulation and climate in Western Europe (1899-2002), *International Journal of Climatology*, 27 (15), 2055-2067, DOI: 10.1002/joc.1504.
- Khatri D., Pandey V.P., 2021, Climate Change Impact on the Hydrological Characteristics of Tamor River Basin in Nepal Based on CMIP6 Models, [in:] *Proceedings of 10<sup>th</sup> IOE Graduate Conference*, 10, 532-539.
- Kohnová S., Rončák P., Hlavčová K., Szolgay J., Rutkowska A., 2019, Future impacts of land use and climate change on extreme runoff values in selected catchments of Slovakia, *Meteorology, Hydrology and Water Management*, 7 (1), 47-55, DOI: 10.26491/mhwm/97254.

- Koshkina O.V., Gorbachova L.O., 2013, Hydro-genetic research method of the main factors of the spring flood in the Desna River Basin, [in:] 11<sup>th</sup> Annual International Conference of Young Scientists on Energy Issues, Cyseni, Kaunas, Lithuanian Energy Institute, IX618-IX631.
- Krasovskaia I., Gottschalk L., 2002, River flow regimes in a changing climate, *Hydrological Sciences Journal*, 47 (4), 597-609, DOI: 10.1080/02626660209492962.
- Kuchar L., Szalińska W., Iwański S., Jelonek L., 2014, A modeling framework to assess the impact of climate change on river runoff, *Meteorology, Hydrology and Water Management*, 2 (2), 49-63, DOI: 10.26491/mhwm/36671.
- Liu L., Xu Z.X., 2017, Hydrological implications of climate change on river basin water cycle: case studies of the Yangtze River and Yellow River basins, China, *Applied Ecology and Environmental Research*, 15 (4), 683-704, DOI: 10.15666/aecer/1504\_683704.
- Loboda N.S., 2005, Calculations and generalization of the annual runoff characteristics of the rivers in Ukraine in the conditions of anthropogenic influence, Odessa: Ekologia, 208 pp., (in Russian).
- Malinowski L., Skoczko I., 2018, Impacts of climate change on hydrological regime and water resources management of the Narew River in Poland, *Journal of Ecological Engineering*, 19 (4), 167-175, DOI: 10.12911/22998993/91672.
- Melnyk S., Loboda N., 2020, Trends in monthly, seasonal, and annual fluctuations in flood peaks for the upper Dniester River, *Meteorology, Hydrology and Water Management*, 8 (2), 28-36, DOI: 10.26491/mhwm/126705.
- Menzel L., Niehoff D., Bürger G., Bronstert A., 2002, Climate change impacts on river flooding: A modelling study of three meso-scale catchments, *Climatic Change: Implications for the Hydrological Cycle and for Water Management*, 10, 249-269, DOI: 10.1007/0-306-47983-4\_14.
- Middelkoop H., Daamen K., Gellens D., Grabs W., Kwadijk J.C.J., Lang H., Parmet B.W.A.H., Schädler B., Schulla J., Wilke K., 2001, Impact of climate change on hydrological regimes and water resources management in the Rhine basin, *Climatic Change*, 49, 105-128, DOI: 10.1023/A:1010784727448.
- Nazari P., Kardavany H., Farajirad P., Abdolreza A., 2016, Assessment of runoff changes under climate change scenarios in the dam basin of Ekbatan, Hamedan Iran, *Journal of Climatology and Weather Forecasting*, 4, DOI: 10.4172/2332-2594.1000172.
- Nemec I., Schaake I., 1982, Sensitivity of water resources systems to climate variation, *Hydrological Sciences Journal*, 27 (3), 46-52, DOI: 10.1080/02626668209491113.
- Nováky B., Bálint G., 2013, Shifts and modification of the hydrological regime under climate change in Hungary, [in:] *Climate Change*, B.R. Singh (ed.), IntechOpen, DOI: 10.5772/54768.
- Peterson D., Keller A., 1990, *Irrigation*, [in:] *Climate Change and US Water Resources*, John Wiley, New York, 269-306.
- Phil Graham L., Hagemann S., Jaun S., Beniston M., 2007, On interpreting hydrological change from regional climate models, *Climate Change*, 81, 97-122, DOI: 10.1007/s10584-006-9217-0.
- Planton S., Terray L., 2007, Detection et attribution à l'échelle régionale: Le cas la France, *La Météorologie*, 58, 25-29, DOI: 10.4267/2042/18205.
- Pripyat Basin Water Management Authority, 2022, *Water Resources*, available online at [https://buvrzt.gov.ua/vodni\\_resyrsy.html](https://buvrzt.gov.ua/vodni_resyrsy.html) (data access 18.04.2023).
- Řenzničková L., Brázdil R., Tolasz R., 2007, Meteorological singularities in the Czech Republic in the period 1961-2002, *Theoretical and Applied Climatology*, 88 (3-4), 179-192, DOI: 10.1007/s00704-006-0253-5.
- Rodhe A., 1981, Spring flood: meltwater or groundwater? *Nordic Hydrology*, 12, 21-30.
- Schindler D., 2001, The cumulative effects of climate warming and other human stresses on Canadian freshwaters in the new millennium, *Canadian Journal of Fisheries and Aquatic Sciences*, 58 (1), 18-29, DOI: 10.1007/978-1-4615-1493-0\_11.
- Schnorbus M., Werner A., Bennett K., 2022, Impacts of climate change in three hydrologic regimes in British Columbia, Canada, *Hydrological Processes*, 28 (3), 1170-1189. DOI: 10.1002/hyp.9661.
- Strutynska V.M., 2008, Dynamics of the ice regime characteristics in rivers of the Dnipro River Basin on the background of modern climate changes, *Hydrology, Hydrochemistry and Hydroecology*, 14, 116-122, (in Ukrainian).

- Thiessen A.H., 1911, Precipitation averages for large areas, *Monthly Weather Review*, 39 (7), 1082-1084, DOI: 10.1175/1520-0493(1911)39<1082b:PAFLA>2.0.CO;2.
- Voronoi G., 1908, Nouvelles applications des parametres continus a la theorie des formes quadratiques, deuxieme memoire, recherches sur les paralleloedres primitifs, *Journal fur die Reine and Angewandte Mathematik*, 134, 198-287, DOI: 10.1515/crll.1908.134.198.
- Whitfield P., 2001, Linked hydrologie and climate variations in British Columbia and Yokon, *Environmental Monitoring and Assessment*, 67 (1-2), 217-238, DOI: 10.1023/A:1006438723879.
- WMO, 2017, Guidelines on the Calculation of Climate Normals, WMO-No. 1203, World Meteorological Organization, Geneva, Switzerland.
- Xiang Y., Wang Y., Chen Y., Zhang Q., 2022, Impact of climate change on the hydrological regime of the Yarkant River Basin, China: An assessment using three SSP scenarios of CMIP6 GCMs, *Remote Sensing*, 14 (115), DOI: 10.3390/rs14010115.