

DOI: 10.5604/20830157.1130203

APPLICATION OF THE INTERVAL LATTICE BOLTZMANN METHOD FOR A NUMERICAL MODELLING OF THIN METAL FILMS IRRADIATION BY ULTRA SHORT LASER PULSES

Alicja Piasecka Belkhat, Anna Korczak

Silesian University of Technology, Faculty of Mechanical Engineering, Institute of Computational Mechanics and Engineering

Abstract. In the paper the one-dimensional numerical modelling of heat transfer in thin metal films irradiated by ultra short laser pulses is considered. In the mathematical description the relaxation times and the boundary conditions for phonons and electrons are given as interval numbers. The problem formulated has been solved by means of the interval lattice Boltzmann method using the rules of directed interval arithmetic. The examples of numerical computations are presented in the final part of the paper.

Keywords: Boltzmann transport equation, interval lattice Boltzmann method, directed interval arithmetic

ZASTOSOWANIE INTERWAŁOWEJ METODY SIATEK BOLTZMANN DO NUMERYCZNEGO MODELOWANIA PROCESU NAŚWIETLANIA LASEREM PULSACYJNYM CIENKICH WARSTW METALOWYCH

Streszczenie. W artykule zaprezentowano jednowymiarowy model numeryczny przepływu ciepła w cienkich warstwach metalowych poddanych naświetlaniu laserem pulsacyjnym. W opisie matematycznym czasy relaksacji oraz warunki brzegowe dla fononów i elektronów są zdefiniowane jako liczby przedziałowe. Sformułowane zagadnienie rozwiązano za pomocą interwałowej metody siatek Boltzmann stosując skierowaną arytmetykę interwałową. W końcowej części artykułu przedstawione są przykłady obliczeń numerycznych.

Słowa kluczowe: równanie transportu Boltzmann, interwałowa metoda siatek Boltzmann, skierowana arytmetyka interwałowa

Introduction

In metals heat transport is mainly realized by electrons and phonons which are quanta of lattice vibrations. During this process these carriers transfer energy in the material. Energy transport in nanostructured materials can vary from a bulk. When dimensions are reduced properties predicted for the bulk phase, e.g., thermal conductivity, may not be suitable for modeling thermal transport and then we need some other nanoscale features. This phenomena of energy transport can be described by a system of two Boltzmann transport equations supplemented by the adequate boundary-initial conditions. The first equation is related to the electrons and the second one to the phonons. It is important to point out that both equations are connected by a so called coupled factor.

In the mathematical model describing the heat transfer in a thin gold film the interval values of relaxation times and boundary conditions for phonons and electrons have been assumed. The relaxation time is estimated experimentally and its actual value is still a subject of discussion [5]. So it seems natural to take the interval value of this parameter and this assumption is closer to the real physical conditions of the process analyzed. The external heat source is treated as ultra-short laser pulse [6, 9].

The problem analyzed has been solved using an interval version of the lattice Boltzmann method according to the rules of the directed interval arithmetic [7, 8].

1. Boltzmann transport equation

The Boltzmann transport equation (BTE) is one of the fundamental equation of solid physics. The BTE expressed in a carrier distribution function form [1, 2, 4] can be written as

$$\frac{\partial f}{\partial t} + \mathbf{v} \cdot \nabla f = \frac{f^0 - f}{\tau_r} + g_{ef} \quad (1)$$

where f is the carrier distribution function, f^0 is the equilibrium distribution function given by the Bose-Einstein or Fermi-Dirac statistics, \mathbf{v} is the frequency-dependent carrier propagation speed, τ_r is the frequency-dependent carrier relaxation time and g_{ef} is the electron generation rate due to electron-phonon scattering.

The Boltzmann transport equation can be transformed into an equivalent carrier energy density equation using the simplifying assumptions of the Debye model

$$\frac{\partial e}{\partial t} + \mathbf{v} \cdot \nabla e = -\frac{e - e^0}{\tau_r} + q_v \quad (2)$$

where e is the carrier energy density, e^0 is the equilibrium carrier energy density and q_v is the internal heat generation rate related to an unit of volume.

Using the Debye model the dependence between phonon and electron energy densities and their temperature can be calculated from the following formulas [1, 3]

$$e_e(T_e) = \left(n_e \frac{\pi^2 k_b^2}{2 \varepsilon_F} \right) T_e^2 \quad (3)$$

$$e_{ph}(T_{ph}) = \left(\frac{9\eta k_b}{\Theta_D^3} \int_0^{\Theta_D/T_{ph}} \frac{z^3}{\exp(z) - 1} dz \right) T_{ph}^4 \quad (4)$$

where Θ_D is the Debye temperature of the solid, k_b is the Boltzmann constant, T_e and T_{ph} are the carriers temperatures, ε_F is the Fermi energy, n_e is the electron density while η is the number density of oscillators and can be calculated using the following formula [1]

$$\eta = \frac{1}{6\pi^2} \left(\frac{k_b \Theta_D}{\hbar \omega} \right)^3 \quad (5)$$

where \hbar is the Planck constant divided by 2π and ω is the speed of sound in analysed material.

The formulation of the heat transport problem in metals demand system of two equations which in an equivalent carrier energy density equations has the following form

$$\frac{\partial e_e}{\partial t} + \mathbf{v}_e \cdot \nabla e_e = \frac{e_e^0 - e_e}{\tau_e} + Q_e \quad (6)$$

$$\frac{\partial e_{ph}}{\partial t} + \mathbf{v}_{ph} \cdot \nabla e_{ph} = \frac{e_{ph}^0 - e_{ph}}{\tau_{ph}} + Q_{ph} \quad (7)$$

where e_e, e_{ph} are the carrier energy densities, e_e^0, e_{ph}^0 are the equilibrium carrier energy densities and Q_e, Q_{ph} are the carrier energy sources related to an unit of volume.

2. The interval lattice Boltzmann method

The lattice Boltzmann method (LBM) is a numerical technique for the simulation of heat transfer. The LBM solves a discretized set of the Boltzmann transport equations known as the lattice Boltzmann equations. The Boltzmann transport equations for the coupled problem with two relaxation times can be written in the following form [1, 3]

$$\frac{\partial \bar{e}_e}{\partial t} + \mathbf{v}_e \cdot \nabla \bar{e}_e = \frac{\bar{e}_e^0 - \bar{e}_e}{\bar{\tau}_e} + \bar{Q}_e \quad (8)$$

$$\frac{\partial \bar{e}_{ph}}{\partial t} + \mathbf{v}_{ph} \cdot \nabla \bar{e}_{ph} = \frac{\bar{e}_{ph}^0 - \bar{e}_{ph}}{\bar{\tau}_{ph}} + \bar{Q}_{ph} \quad (9)$$

where \bar{e}_e, \bar{e}_{ph} are the interval values of carrier energy densities for electrons and phonons respectively, $\bar{e}_e^0, \bar{e}_{ph}^0$ are the interval equilibrium carrier energy densities and $\bar{\tau}_e, \bar{\tau}_{ph}$ are the interval relaxation times of electrons and phonons, \bar{Q}_e is the interval electron energy source

$$\bar{Q}_e = Q' - G(\bar{T}_e - \bar{T}_{ph}) \quad (10)$$

and \bar{Q}_{ph} is the interval phonon energy source which is calculated using the formula

$$\bar{Q}_{ph} = G(\bar{T}_e - \bar{T}_{ph}) \quad (11)$$

where Q' is the power density function deposited by the external source associated with the laser irradiation, G is the electron-phonon coupling factor which characterizes the energy exchange between electrons and phonons, \bar{T}_e and \bar{T}_{ph} are the interval temperature values of electrons and phonons.

The temporal variation of laser output pulse is treated as source term in the energy equation and may be approximated by a form of exponential function [5, 11, 12]

$$Q'(x, t) = I_0 \delta e^{-\delta t - \beta t} \quad (12)$$

where I_0 is the peak power intensity of the laser pulse, δ is the absorption coefficient, β is the laser pulse parameter. The absorption coefficient is given by [12]

$$\delta = \frac{4\pi k_{ext}}{\lambda} \quad (13)$$

where k_{ext} is the imaginary parts of the refractive index ($k_{ext} = 1.49$ for Au) and λ is the wavelength of the laser.

The discrete set of propagation velocities in the main lattice directions for one-dimensional model is defined as follows (see Fig. 1)

$$\begin{aligned} \mathbf{c}_{e1} &= [c_e, 0] \\ \mathbf{c}_{e2} &= [-c_e, 0] \\ \mathbf{c}_{ph1} &= [c_{ph}, 0] \\ \mathbf{c}_{ph2} &= [-c_{ph}, 0] \end{aligned} \quad (14)$$




Fig. 1. One-dimensional 2-speed lattice Boltzmann model

The vectors \mathbf{c}_{e1} and \mathbf{c}_{e2} represent the velocities of the electrons, while the vectors \mathbf{c}_{ph1} and \mathbf{c}_{ph2} represent the velocity of the phonons in the horizontal direction [1].

In the interval lattice Boltzmann method is needed to solve a system of four partial differential equations allowing to compute phonon and electron energy densities in different lattice nodes according to the following equations

$$\begin{cases} \frac{\partial \bar{e}_{e1}}{\partial t} + c \frac{\partial \bar{e}_{e1}}{\partial x} = -\frac{\bar{e}_{e1} - \bar{e}_{e1}^0}{\bar{\tau}_e} + \bar{Q}_e \\ \frac{\partial \bar{e}_{e2}}{\partial t} - c \frac{\partial \bar{e}_{e2}}{\partial x} = -\frac{\bar{e}_{e2} - \bar{e}_{e2}^0}{\bar{\tau}_e} + \bar{Q}_e \\ \frac{\partial \bar{e}_{ph1}}{\partial t} + c \frac{\partial \bar{e}_{ph1}}{\partial x} = -\frac{\bar{e}_{ph1} - \bar{e}_{ph1}^0}{\bar{\tau}_{ph}} + \bar{Q}_{ph} \\ \frac{\partial \bar{e}_{ph2}}{\partial t} - c \frac{\partial \bar{e}_{ph2}}{\partial x} = -\frac{\bar{e}_{ph2} - \bar{e}_{ph2}^0}{\bar{\tau}_{ph}} + \bar{Q}_{ph} \end{cases} \quad (15)$$

where $c = \Delta x / \Delta t$ is the component of velocity along the x -axis, Δx is the lattice distance from site to site, $\Delta t = t^{f+1} - t^f$ is the time step. The set of equations (15) must be supplemented by the boundary conditions of the following form

$$\begin{cases} x=0: & \bar{q}_b^e(0, t) = c_e [e_e(\bar{T}_e)_0 - e_e(\bar{T}_e)_1] \\ x=L: & \bar{e}_e(L, t) = e_e(\bar{T}_{b2}^e) \\ x=0: & \bar{q}_b^{ph}(0, t) = c_{ph} [e_{ph}(\bar{T}_{ph})_0 - e_{ph}(\bar{T}_{ph})_1] \\ x=L: & \bar{e}_{ph}(L, t) = e_{ph}(\bar{T}_{b2}^{ph}) \end{cases} \quad (16)$$

and the initial condition

$$t=0: \quad e_e(x, 0) = e_e(T_0^e), \quad e_{ph}(x, 0) = e_{ph}(T_0^{ph}) \quad (17)$$

where \bar{T}_{b2}^e and \bar{T}_{b2}^{ph} are the interval boundary temperatures of electrons and phonons, T_0^e and T_0^{ph} are the initial temperatures of electrons and phonons, $\bar{q}_b^e, \bar{q}_b^{ph}$ are the interval boundary heat fluxes of electrons and phonons.

The approximation of the first derivatives using right-hand and left-hand sides differential quotients for electrons and phonons is defined as

$$\frac{\partial \bar{e}_i}{\partial t} = \frac{\bar{e}_i(x, t + \Delta t) - \bar{e}_i(x, t)}{\Delta t}, \quad i = e1, e2, ph1, ph2 \quad (18)$$

and

$$\begin{aligned} \frac{\partial \bar{e}_{e1}}{\partial x} &= \frac{\bar{e}_{e1}(x + \Delta x, t + \Delta t) - \bar{e}_{e1}(x, t + \Delta t)}{\Delta x} \\ \frac{\partial \bar{e}_{e2}}{\partial x} &= \frac{\bar{e}_{e2}(x - \Delta x, t + \Delta t) - \bar{e}_{e2}(x, t + \Delta t)}{\Delta x} \\ \frac{\partial \bar{e}_{ph1}}{\partial x} &= \frac{\bar{e}_{ph1}(x + \Delta x, t + \Delta t) - \bar{e}_{ph1}(x, t + \Delta t)}{\Delta x} \\ \frac{\partial \bar{e}_{ph2}}{\partial x} &= \frac{\bar{e}_{ph2}(x - \Delta x, t + \Delta t) - \bar{e}_{ph2}(x, t + \Delta t)}{\Delta x} \end{aligned} \quad (19)$$

Then after introduction time and position derivatives the discretized form of (15) is as follows

$$\begin{cases} (\bar{e}_{e1})_{i+1}^{f+1} = \left(1 - \frac{\Delta t}{\bar{\tau}_e}\right) (\bar{e}_{e1})_i^f + \frac{\Delta t}{\bar{\tau}_e} (\bar{e}_{e1}^0)_i^f + \Delta t \bar{Q}_e \\ (\bar{e}_{e2})_{i-1}^{f+1} = \left(1 - \frac{\Delta t}{\bar{\tau}_e}\right) (\bar{e}_{e2})_i^f + \frac{\Delta t}{\bar{\tau}_e} (\bar{e}_{e2}^0)_i^f + \Delta t \bar{Q}_e \\ (\bar{e}_{ph1})_{i+1}^{f+1} = \left(1 - \frac{\Delta t}{\bar{\tau}_{ph}}\right) (\bar{e}_{ph1})_i^f + \frac{\Delta t}{\bar{\tau}_{ph}} (\bar{e}_{ph1}^0)_i^f + \Delta t \bar{Q}_{ph} \\ (\bar{e}_{ph2})_{i-1}^{f+1} = \left(1 - \frac{\Delta t}{\bar{\tau}_{ph}}\right) (\bar{e}_{ph2})_i^f + \frac{\Delta t}{\bar{\tau}_{ph}} (\bar{e}_{ph2}^0)_i^f + \Delta t \bar{Q}_{ph} \end{cases} \quad (20)$$

The equilibrium electron energy density and phonon energy density is the same in all lattice directions and can be calculated using the formula

$$(\bar{e}_e^0)_i^{f+1} = \frac{(\bar{e}_e)_i^{f+1}}{2} \quad (21)$$

$$(\bar{e}_{ph}^0)_i^{f+1} = \frac{(\bar{e}_{ph})_i^{f+1}}{2} \quad (22)$$

The total energy density is defined as the sum of discrete electron and phonon energy densities in two directions of the lattice

$$\bar{e}_e = \bar{e}_{e1} + \bar{e}_{e2} \quad (23)$$

$$\bar{e}_{ph} = \bar{e}_{ph1} + \bar{e}_{ph2} \quad (24)$$

After subsequent computations the temperature of electrons and phonons are determined using the following formulas (see eq. 3 and 4)

$$\bar{T}_e^{f+1} = \sqrt{\bar{e}_e(\bar{T}_e^f) / \left(n_e \frac{\pi^2 k_b^2}{2 \epsilon_F} \right)} \quad (25)$$

$$\bar{T}_{ph}^{f+1} = \sqrt[4]{\bar{e}_{ph}(\bar{T}_{ph}^f) \Theta_D^3 / 9\eta k_b \int_0^{\Theta_D/\bar{T}_{ph}^f} \frac{z^3}{\exp(z)-1} dz} \quad (26)$$

1. Results of computations

As a numerical example the heat transport in a gold thin film of the dimension 200 nm has been analyzed. To the modelling internal heat source was taken into account the KrF laser with the wavelength of $\lambda = 248$ nm [7].

The following input data have been introduced: the relaxation time $\bar{\tau}_{re} = [0.038, 0.042]$ ps, $\bar{\tau}_{rph} = [0.76, 0.84]$ ps, the Debye temperature $\Theta_D = 170$ K, the peak power intensity of the laser pulse $I_0 = 2 \cdot 10^{13}$ W/m², the absorption coefficient $\delta = 7.55 \cdot 10^7$ 1/m, the laser pulse parameter $\beta = 0.5 \cdot 10^{13}$ 1/s, the coupling factor $G = 2.3 \cdot 10^{16}$ W/m³K, the boundary conditions of the 2nd type on the left boundary $\bar{q}_b^e(0, t) = \bar{q}_b^{ph}(0, t) = 0$ and the 1st type on the right boundary with the interval temperature $\bar{T}_{b2}^e = \bar{T}_{b2}^{ph} = [285, 315]$ K, the initial temperature $T_0 = 300$ K. The lattice step $\Delta x = 20$ nm and the time step $\Delta t = 0.01$ ps have been assumed.

Figure 2 presents the courses of the temperature functions at the internal nodes 1 – 20 nm, 2 – 80 nm and 3 – 140 nm. For interval values of the electron and phonon relaxation times and the boundary conditions we obtain two curves for each internal node which denote the first and the second endpoints of the temperature interval. The application of the interval version of the LBM allows one to find the numerical solution in the interval form.

Figure 3 shows the courses of the temperature function at the same internal nodes but for wider intervals of the boundary conditions ($\bar{T}_{b2}^e = \bar{T}_{b2}^{ph} = [270, 330]$ K) and the relaxation times ($\bar{\tau}_{re} = [0.036, 0.044]$ ps, $\bar{\tau}_{rph} = [0.72, 0.88]$ ps). The interval temperatures are, of course, wider.

Figure 4 presents the interval temperature distribution in the domain considered for the chosen times: 0.6, 0.8 and 1 ps.

Figure 5 also shows the interval temperature distribution in the domain but for wider intervals of the boundary conditions and the relaxation times. We can see that the temperature intervals are also wider.

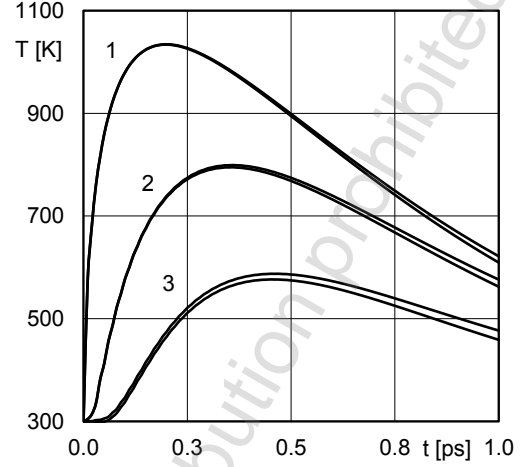


Fig. 2. The interval heating curves at internal nodes

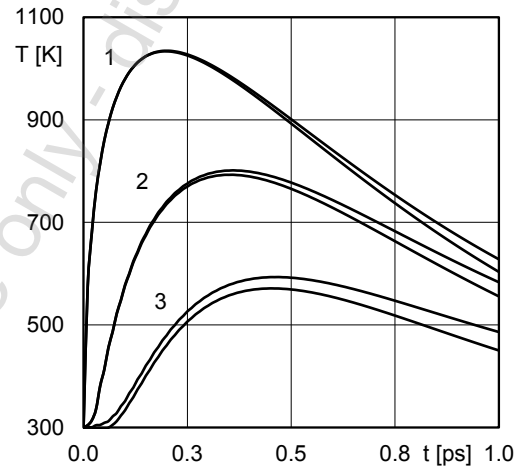


Fig. 3. The interval heating curves at internal nodes for wider parameters

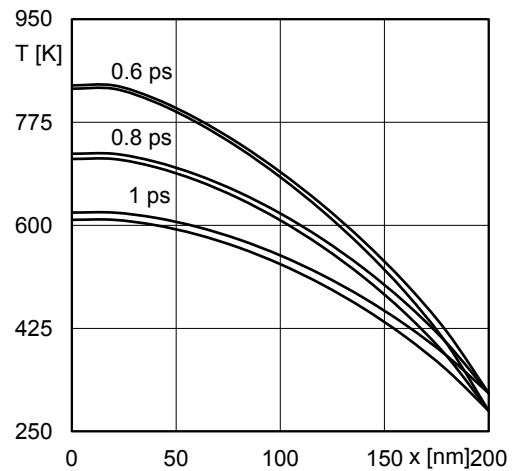


Fig. 4. The interval temperature distribution in gold film

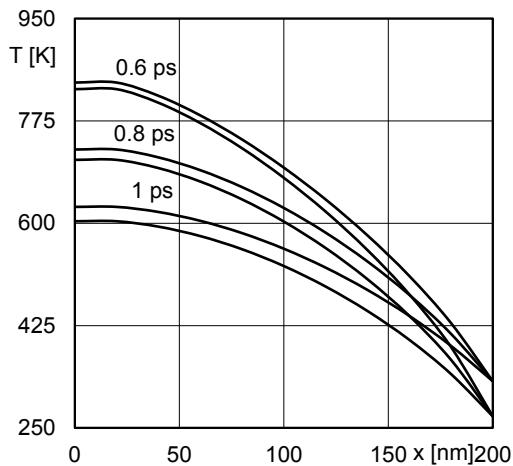


Fig. 5. The interval temperature distribution in gold film for wider parameters

2. Conclusions

In the paper the coupled Boltzmann transport equation with the interval values of the relaxation times and the boundary conditions for electrons and phonons has been considered. The generalization of lattice Boltzmann method allows one to find the numerical solution in the interval form and such an information may be important especially for the parameters which are estimated experimentally, for example the relaxation time. The main advantage of the directed interval arithmetic upon the classical interval arithmetic is that the obtained temperature intervals are much narrower. The problem analyzed can be extended to multi-layered domains.

References

- [1] Escobar R. A., Ghai S. S., Jhon M. S., Amon C. H.: Multi-length and time scale thermal transport using the lattice Boltzmann method with application to electronics cooling, *Journal of Heat and Mass Transfer*, 49, 2006, 97-107.
- [2] Eshraghi M., Felicelli S.D.: An implicit lattice Boltzmann model for heat conduction with chase chandler, *International Journal of Heat and Mass Transfer*, 55, 2012, 2420-2428.
- [3] Ghai S. S., Kim W. T., Escobar R. A., et al.: A novel heat transfer model and its application to information storage systems, *Journal Applied Physics* 97, 2005.

- [4] Joshi A. A., Majumdar A.: Transient ballistic and diffusive phonon heat transport in thin films, *Journal of Applied Physics* 74(1), 1993, 31-39.
- [5] Kaviany M., McGaughey A. J. H.: Integration of molecular dynamics simulations and Boltzmann transport equation in phonon thermal conductivity analysis, *IMECE* 2003-41899, 2003.
- [6] Lee J. B., Kang K., Lee S. H.: Comparison of Theoretical Models of Electron-Phonon Coupling in Thin Gold Films Irradiated by Femtosecond Pulse Lasers, *Materials Transactions*, Vol. 52, No. 3, 2011, 547-553.
- [7] Piasecka Belkhayat A., Korczak A.: Modelling of transient heat transport in one-dimensional crystalline solids using the interval lattice Boltzmann method, *Recent Advances in Computational Mechanics* (Eds. T.Łodygowski, J.Rakowski and P.Litewka), Taylor & Francis Group, A Balkema Book, London, 2014.
- [8] Piasecka Belkhayat A., Korczak A.: Numerical modelling of the transient heat transport in 2d silicon thin film using the interval lattice Boltzmann method, *Journal of Applied Mathematics and Computational Mechanics*, 13 (2), 2014, 95-103.
- [9] Venkatakrishnan K., Tan B., Ngoi B. K. A.: Femtosecond pulsed laser ablation of thin gold film, *Optics & Laser Technology*, 34, 2002, 199-202.
- [10] Yilbas B. S., Al-Dweik A. Y., Bin Mansour S.: Analytical solution of hyperbolic heat conduction equation in relation to laser short-pulse heating, *Physica B*, 406, 2011, 1550-1556.
- [11] Yilbas B. S.: A closed form solution for temperature rise inside solid substrate due to time exponentially varying pulse, *International Journal of Heat and Mass Transfer*, 45, 2002, 1993-2000.
- [12] Zhang X., Chu. S. S., Ho J. R.: Grigoropoulos C.P., Excimer laser ablation of thin gold films on a quartz crystal microbalance at various argon background pressures, *Applied Physics A*, 64, 1997, 545-552.

Prof. Alicja Piasecka-Belkhayat
e-mail: alicja.piasecka@polsl.pl

Alicja Piasecka-Belkhayat is employed at the Silesian University of Technology in the Institute of Computational Mechanics and Engineering as a university professor. She is the head of Department of Thermal and Biomedical Engineering. Her research interests lead in interval methods (BEM, FDM, FEM), computational methods in mechanics, mathematical modelling and heat transfer.



M.Sc. Eng. Anna Korczak
e-mail: anna.korczak@polsl.pl

Anna Korczak is a PhD student at Institute of Computational Mechanics and Engineering of Silesian University of Technology. She received her Master of Science in Engineering degree firstly in Mathematics and secondly in Mechanics and Machine Design from Silesian University of Technology in 2010 and 2012 respectively. Her research interests focus on heat transfer and numerical methods.



otrzymano/received: 2014.07.16

przyjęto do druku/accepted: 2014.11.04

INFORMACJA

XVI SCIENTIFIC CONFERENCE and IV SCHOOL

OPTICAL FIBRES AND THEIR APPLICATIONS

TAL 2015

September 22 - 25, Lublin and Naleczow

Under the auspices of

Committee of Electronics and Telecommunication, Polish Academy of Science
Polish Committee of Optoelectronics SEP
Photonics Society of Poland

Organizers

Department of Optical Fibres Technology Maria Curie-Skłodowska University, Lublin

Institute of Electronics and Information Technology, Lublin University of Technology, Lublin

