

Jolanta BOHDZIEWICZ¹ and Gabriela LISZCZYK¹

EVALUATION OF EFFECTIVENESS OF BISPHENOL A REMOVAL ON DOMESTIC AND FOREIGN ACTIVATED CARBONS

SKUTECZNOŚĆ USUWANIA BISFENOLU A NA KRAJOWYCH I ZAGRANICZNYCH WĘGLACH AKTYWNYCH

Abstract: Wide use of bisphenol A (BPA) in production of polycarbonates and plastic food packaging cause increase of concentration of BPA in the environment. Both in surface water, underground water and seawater BPA was frequently detected in different concentrations. Emerging problem is adsorption of BPA on sewage sludge, because it could be considered as an additional source of pollution if it is used as a fertilizer in agricultural sectors. Absorbed BPA on sewage sludge stays persistent in the environment and generates adverse biological effects in endocrine system. Because of ecological safety, exploration of potential techniques to remove BPA to the level, which does not give adverse effect on natural environment is necessary. In this study the adsorption of BPA from simulated water onto commercial activated carbons was investigated. On the basis of experimental data the kinetics and type of sorption were determined.

Keywords: micropollutants, sorption, activated carbons

In recent years, increasing attention is focused on the presence of xenoestrogens in the aquatic environment, that degrade its quality and cause disturbances in endocrine system of living organisms. Among xenoestrogens one of the most prevalent is *bisphenol A* (BPA), which occurrence in the environment is connected with anthropogenic activity. BPA is mainly used for production of epoxy resin and polycarbonate plastics. Therefore, industrial and municipal wastewater and landfill leachates have to be considered as point sources of BPA. In recent works the presence of BPA have been documented in different matrices such as sewage sludge, effluents from wastewater treatment plant, river water and sediments soil. The results provided by Gibson et al from Mexico City wastewaters showed concentrations of BPA ranged from 0.77 to 2.5 $\mu\text{g}/\text{dm}^3$ [1]. The study conducted in Toronto reported widely divergent concentration of BPA in wastewater from different industrial sectors. Concentration of BPA ranged 0.08÷91.27 $\mu\text{g}/\text{dm}^3$, 0.75÷43.45 $\mu\text{g}/\text{dm}^3$, 0.1÷0.48 $\mu\text{g}/\text{dm}^3$ for wastewater from chemical products industry, commercial laundries, textile and clothing industries, respectively. Yamamoto et al determined concentration of BPA in some samples from hazardous waste landfill leachates with median concentration 269 $\mu\text{g}/\text{dm}^3$ [2]. Latter publications reported concentration of BPA in municipal landfill leachates in the range 26÷8400 $\mu\text{g}/\text{dm}^3$ [3].

The significance of the problem of BPA in the environment is intensified by physicochemical properties of this compound such as low solubility, high hydrophobicity characteristics. These properties suggest that BPA has low biodegradability and accumulates in living organisms.

The influence of BPA presence even at low concentration in the environment can cause feminization of aquatic organisms, decrease in population fertility and survival of

¹ Institute of Water and Wastewater Engineering, Silesian University of Technology, Konarskiego 18, 44-100, Gliwice, phone 32 237 16 98, fax 32 237 10 47, email: gabriela.liszczyk@polsl.pl

progeny. Wide ranging global studies have demonstrated that exposure to BPA, interfere endocrine system in diverse range of concentrations and the effects can be very unpredictable as a consequence of its ability to initiate numerous responses.

According to U.S. *Environmental Protection Agency* (EPA) BPA has been identified as an “exogenous” agent, that interfaces with synthesis, secretion, transport, binding action or elimination of natural hormones in the body that are responsible for the maintenance of homeostasis, reproduction or behaviour.

Given the ecological safety it is advisable to develop effective technology of removal of BPA to the level, excluding their negative impact on the environment. Some investigations have indicated, that nanofiltration and reverse osmosis are efficient techniques to remove bisphenol A [4-7]. Adsorption is one of the simplest and widely used methods that can be applied to removal micropollutants from water. Adsorption potential of selected activated carbons were tested and found that BPA was effectively removed from aqueous solution [8, 9].

The aims of the study were (1) to compare the effectiveness of removal of BPA using selected activated carbons (2) determine adsorption behaviour of BPA (3) fit two kinetic models to analyze the experimental data.

Materials and methods

Characterization of the activated carbons

Two kinds of commercial powder activated carbons were tested. Carbon AKPA-22 (Gryfskand, Poland) and SX2 (Norit (R), USA) were used for the comparative adsorption experiments. Both of them are being used for water conditioning. The sorbents used in this study did not subject any extra treatment in order to replicate their application in commercial water treatment processes. BPA (purity > 99%) was purchased from Sigma-Aldrich (Poznan, Poland).

Adsorption experiments

In order to determine kinetics and isotherms, batch experiments in an orbital shaker at 180 r/min were conducted. In the adsorption kinetics experiments, the concentration of activated carbon was equalled at 30 mg/dm³ and the initial concentration of BPA was at the level of 5 mg/dm³. At predetermined time intervals, the samples were filtered in order to separate sorbents from solution of BPA.

Isotherms studies can be investigated by varying the initial concentration of adsorbate [10] or the sorbent amount [11]. In this study, the sorbent concentrations were changing in the range from 10 to 120 mg/dm³ and the initial concentration of BPA was equalled at 15 mg/dm³. The experiments were conducted under ambient conditions. The flasks were put in a shaker for 3 h. After finishing experiments, sorbents were separated from BPA solution. The concentration of BPA was determined using phenol cell test (photometric method, MERCK). The amount of BPA absorbed onto activated carbons was calculated according to the following equation:

$$q_e = \frac{(C_0 - C_e) \cdot v}{m} \quad (1)$$

where q_e [mg/g] is equilibrium adsorption amount, C_0 and C_e [mg/dm³] are the initial and equilibrium concentration of BPA, and m [g] is the mass of sorbent.

Results and discussion

Removal efficiency of BPA

In this part the efficiency of BPA removal for AKPA-22 and SX2 was compared. The results of this comparative study were illustrated on the Figure 1. The removal efficiency of BPA was in the range 9.6÷85.7 and 12.6÷82.7% at the dosage change from 10 to 110 mg/dm³ for AKPA-22 and SX2, respectively. In lower dosages of sorbents using SX2 showed little higher level of removal of BPA than AKPA-22. However in high dosages of sorbents reverse tendency was observed, higher removal of BPA was observed on AKPA-22 than on SX2. Overall, this study shows that both sorbents have ideal performance for removal bisphenol A from aqueous solutions.

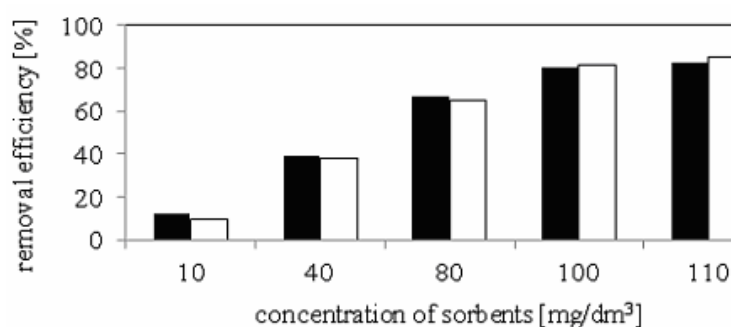


Fig. 1. The removal efficiency of BPA depending on dosage of sorbents (AKPA-22 (□), SX2 (■))

Adsorption kinetics of BPA

In order to determine the adsorption kinetics of BPA, the experimental data were analyzed using pseudo-first-order and pseudo-second-order kinetic models, which were given in the equation (2) and (3) respectively:

$$\frac{\ln(q_e - q_t)}{q_e} = -K_1 t \quad (2)$$

$$\frac{t}{qt} = \frac{1}{K_2 q_e^2} + \frac{t}{q_e} \quad (3)$$

where q_e and q_t are the amount of BPA adsorbed at equilibrium and at time (t), K_1 and K_2 are the pseudo-first-order and pseudo-second-order constants respectively. Furthermore on the basis pseudo-second-order model were calculated the half adsorption time ($t_{1/2}$) and the initial adsorption rate (h) according to following equations:

$$t_{1/2} = \frac{1}{k_2 \cdot q_e} \quad (4)$$

$$h = k_2 q_e^2 \quad (5)$$

Figure 2 shows adsorption of bisphenol A onto selected activated carbons versus time. Both curves resemble the same trend, however the equilibrium time of BPA onto AKPA-22 was shorter than onto SX2 and were equalled 180 min and 270 min, respectively. This means that addition of BPA onto surface of AKPA-22 was faster than SX2. The Figures 3 and 4 present the results of fitting experimental data with kinetic models. The adsorption kinetic parameters listed in table 1 show that the pseudo-second-order model fitted better the experimental data than pseudo-first-order model both for AKPA-22 and SX2. The adsorption capacity calculated from pseudo-second-order model ($q_{e(cal)}$) also corresponds well with the experimental data ($q_{e(exp)}$). The higher rate constant, lower time required for half of q_e of BPA to be absorbed of AKPA-22 confirm better adsorption of BPA than SX2.

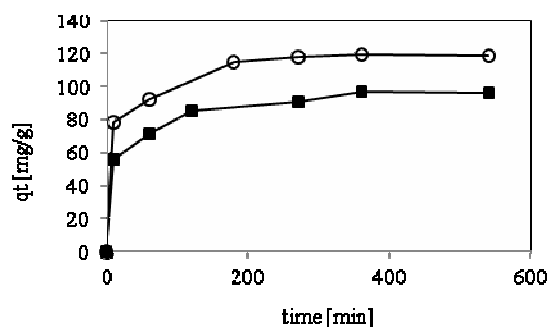


Fig. 2. Time-resolved uptake of BPA onto AKPA-22 (○) and SX2 (■)

Adsorption rate constants rate for two kinetic models

Table 1

Adsorbent	Pseudo-first-order equation		Pseudo-second-order equation					
	K_1 [1/min]	R^2	K_2 [g/(mg·min)]	$q_{e2(exp)}$ [mg/g]	$q_{e2(cal)}$ [mg/g]	$t_{1/2}$ [min]	h [mg/(g·min)]	R^2
AKPA-22	0.0106	0.921	0.001	118.7	120.48	8.3	14.51	0.9992
SX2	0.0019	0.8049	0.00085	97	98.03	12	8.16	0.9981

Adsorption isotherms of BPA

The isothermal data were fitted to Freundlich and Langmuir models according to their linear equation. The equations are as follows:

The Freundlich equation:

$$\log q_e = \log K_F + \frac{1}{n} \log C_e \quad (6)$$

where K_F [$\text{mg}(\text{dm}^3/\text{mg})^{1/2}/\text{g}$] is the Freundlich constant reflects the bonding energy, the parameter $1/n$ with value between $0 \div 1$ describes adsorption intensity or surface heterogeneity; q_e [mg/g] and C_e [mg/dm^3] are the uptake capacity and the equilibrium concentration, respectively.

The Langmuir equation:

$$\frac{1}{q_e} = \frac{1}{q_m K_L} \cdot \frac{1}{C_e} + \frac{1}{q_m} \quad (7)$$

where q_e [mg/g] and C_e [mg/dm³] are the uptake capacity and the equilibrium concentration respectively. K_L [dm³/mg] is the Langmuir constant and q_m [mg/g] is the maximum adsorption capacity.

The parameters of models are summarized in Table 2 only for AKPA-22 because in case of SX2 bad fitting was obtained. This indicated that Langmuir and Freundlich models are not sufficient to describe adsorption of BPA onto SX2 and the another mixed models were needed for this isotherms. Compared with Langmuir model, Freundlich model fitted the experimental data better because the R^2 values were higher for Freundlich than Langmuir models for sorbent AKPA-22. The Langmuir theory assumes monolayer adsorption where molecules interact only with the surface of sorbent. On the other hand Freundlich theory describes multilayer coverage where molecules interact with the surface of sorbent and then with each other. The high value of R^2 demonstrates that BPA forms multimolecular layer on the surface of AKPA-22. The $1/n$ value was less than 1 indicating a favorable adsorption system and heterogeneity of the sorbent adsorption sites.

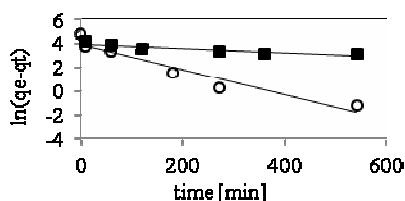


Fig. 3. Simulation of BPA adsorption onto AKPA-22 (○) and SX2 (•) by means of pseudo-first-order kinetics

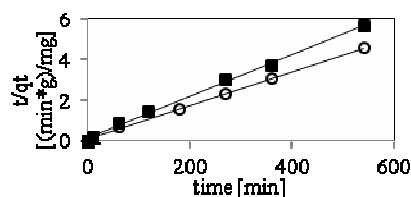


Fig. 4. Simulation of BPA adsorption onto AKPA-22 (○) and SX2 (•) by means of pseudo-second-order kinetics

Table 2

Fitted parameters using Freundlich and Langmuir models for adsorption of BPA by AKPA-22 and SX2

Adsorbent	Freundlich model		Langmuir model	
	K_F [mg(dm ³ /mg) ^{1/2} /g]	$1/n$	K_L [dm ³ /mg]	q_m [mg/g]
AKPA-22	97.49	0.12	2.37	131.57

Conclusions

1. The study indicated high removal efficiencies of BPA using both sorbents (AKPA-22, SX2).
2. The kinetics data fitted better with the pseudo-second-order model than pseudo-first-order model fitted.
3. Adsorption of BPA on AKPA-22 was much faster than on SX2.
4. Adsorption isotherms fitted better with the Freundlich model than the Langmuir model.

References

- [1] Gibson R, Becerril-Bravo E, Silva-Castro V, Jimenez B. Determination of acidic pharmaceuticals and potential endocrine disrupting compounds in wastewater and spring waters by selective elution and analysis by gas chromatography-mass spectrometry. *J Chromatogr.* 2007;1169:31-39. DOI: 10.1016/j.chroma.2007.08.056.
- [2] Yamamoto T, Yasuhara A, Shiraiishi H, Nakasugi O. Bisphenol A in hazardous waste landfill leachates. *Chemosphere.* 2001;42:415-418. DOI: 10.1016/S0045-6535(00)00079-5.
- [3] Urase T, Miyashita K. Factors affecting the concentrations of Bisphenol A in leachates from solid waste disposal and its fate in treatment processes. *J Material Cycles Waste Manage.* 2003;5:77-82.
- [4] Bodzek M, Dudziak M. Elimination of steroidal sex hormones by conventional water treatment and membrane process. *Desalination.* 2006;198:24-32. DOI: 10.1016/j.desal.2006.09.005.
- [5] Dudziak M, Bodzek M. Usuwanie mikrozanieczyszczeń estrogenicznych z roztworów wodnych w wysoko ciśnieniowych procesach membranowych. *Ochr Środow.* 2009;3:33-36.
- [6] Braeken L, Van der Bruggen B. Feasibility of nanofiltration for the removal of endocrine disrupting compounds. *Desalination.* 2009;240:127-131. DOI: 10.1016/j.desal.2007.11.069.
- [7] Meier J, Melin T, Eilers L. Nanofiltration and adsorption on powdered adsorbent as process combination for the treatment of severely contaminated wastewater. *Desalination.* 2002;146:361-366. DOI: 10.1016/S0011-9164(02)00513-1.
- [8] Liu G, Ma J, Qin Q. Adsorption of bisphenol A from aqueous solution onto activated carbons with different modification treatments. *J Hazard Mater.* 2009;164:1872-1878. DOI: 10.1016/j.watres.2010.12.00.
- [9] Sui Q, Huang Y, Liu Y, Chang X, Ji G, Deng S, Xie T, Yu G. Rapid removal of bisphenol A on highly ordered mesoporous carbon. *J Environ Sci.* 2011;23:177-182. DOI: 10.1016/S1001-0742(10)60391-9.
- [10] Bautista-Toledo I, Ferro-Garcia MA, Rivera-Utrilla J, Moreno-Castilla C, Vegas Fernandez FJ. Bisphenol A removal from water by activated carbon. Effect of carbon characteristics and solution chemistry. *Environ Sci Technol.* 2005;39(16):6246-6250. DOI: 10.1021/es0481169.
- [11] Fukuhara T, Iwasaki S, Kawashima M, Shinohara O, Abe I. Adsorbability of estrone and 17 β -estradiol in water onto activated carbon. *Water Res.* 2006;40(2):241-248. DOI: 10.1016/j.watres.2005.10.042.

SKUTECZNOŚĆ USUWANIA BISFENOLU A NA KRAJOWYCH I ZAGRANICZNYCH WĘGLACH AKTYWNYCH

Instytut Inżynierii Wody i Ścieków, Politechnika Śląska, Gliwice

Abstrakt: Masowe wykorzystywanie *bisfenolu A* (BPA) do produkcji tworzyw sztucznych i opakowań na żywność powoduje wzrost stężenia tego związku w środowisku. Zarówno wody powierzchniowe, podziemne, jak i morskie ulegają coraz większemu skażeniu bisfenolem A. Niepokojący jest fakt, że BPA obecny w ściekach w znacznym stopniu ulega sorpcji na kłaczkach osadu czynnego, co wskazuje na dodatkowe źródło zanieczyszczenia środowiska tym związkiem. Zasorbowany na osadzie bisfenol A trwale pozostaje w środowisku, wywołując niekorzystne efekty biologiczne głównie o charakterze hormonalnym. Zagrożenie, jakie stanowi ten związek, powoduje konieczność poszukiwania efektywnych metod jego usuwania. W pracy podjęto próbę usunięcia BPA z roztworów wodnych na krajowych i zagranicznych węglach aktywnych. Na podstawie danych doświadczalnych wyznaczono kinetykę i typ procesu sorpcji.

Słowa kluczowe: mikrozanieczyszczenia, sorpcja, węgle aktywne