

Krause E., Drobek L., Borecki T. (2014). Assessment of hazard due to release of gaseous ammonia from the fly ash-water mixture applied in longwall mine gobs. *Journal of Sustainable Mining*, 13(2), 1–5. doi:10.7424/jsm140201

ORIGINAL PAPER

Received: 6 March 2014 | Revised: 30 May 2014 | Published online: 23 June 2014

ASSESSMENT OF HAZARD DUE TO RELEASE OF GASEOUS AMMONIA FROM THE FLY ASH-WATER MIXTURE APPLIED IN LONGWALL MINE GOBS

Eugeniusz Krause^{1*}, Leszek Drobek², Tomasz Borecki²

¹ Department of Gas Hazard Control, Experimental Mine “Barbara”, Central Mining Institute (Katowice, Poland)

² Department of Environment Monitoring, Central Mining Institute (Katowice, Poland)

Corresponding author: e-mail: ekrause@gig.eu, tel. +48 32 32 46 501, fax: +48 32 202 87 45

ABSTRACT

Purpose	The introduction of flue gas denitrification technologies by selective catalytic reduction (SCR) or selective non-catalytic reduction (SNCR) in coal fired plants resulted in an increase of ammonia content in fly ash. The utilization of fly ash in fire and ventilation prevention of hard coal mines causes the release of ammonia from a fly ash-water mixture. In the applied technology of the ash and water mixture, ammonia in gaseous form is discharged and mixes with the air flowing through the mine airways. In this article, reference is made to the risk assessment of gaseous ammonia in the longwall area during the application of the fly ash-water mixture to the gobs in the U-tube ventilation system.
Methods	The test methods include: ammonia release from ash and water mixtures at various temperatures and in respect to different proportions of water to ash with use of a multigas analyzer with an FTIR detector.
Results	The results of the laboratory tests helped to determine the size of the ammonia stream released from the fly ash-water mixture in respect to different ratios of water to ash.
Practical implications	Laboratory studies allow for ventilation and gaseous analysis to assess the level of ammonia risk, in the mine airways, from exhaust air discharged from the longwall area.
Originality/value	Based on the literature review, this type of research has not been carried out so far.

Keywords

ammonia, fly ash, gas hazard

1. INTRODUCTION

The use of hard coal exploitation technology in hazardous conditions of spontaneous fire requires the selection of appropriate preventive measures. The most effective method for spontaneous fire risk prevention is the application of a fly ash and process water mixture, to the gobs (Krause, Łukowicz, & Piotrowski, 2009; Krause, 2009). Energy production waste has been used for many years in fire prevention in hard coal mines and has influenced both the decrease in spontaneous fire risks and the limitation of unwanted air loss through the isolation of drifts and gobs with inactive ventilation.

The ash and water mixture in hard coal mines is applied by utilizing the following technologies:

- sealing the gobs of the operated longwalls,
- sealing isolated void gobs after the operation,
- the winding-up of pits with inactive ventilation by backfilling,

- the application of long plugs insulating the closed pits and gobs from mine workings with active ventilation,
- the winding-up by backfilling of: shafts, large diameter holes, drifts, excavation chambers and other drifts.

The aforementioned mentioned technologies related to the use of the ash and water mixture in fire and gas prevention of hard coal mines are entangled with the basic activities of hard coal mining (Krause & Piotrowski, 1997; Krause, 2009).

The broad spectrum of technologies connected with the use of fly ash in coal mines leads to the reduction of air migration through gobs. Regardless of the size of the air delivery in the active drifts, the air migrates through gobs, causing minor flows despite stripping gobs by dams.

The ash and water mixture is characterized by wide usage in fire and gas prevention during drifts being wound-up by backfilling. Such winding-up procedures are usually applied at ventilation levels of mines and results from deeper excava-

tion. Ash and water mixture applied to the liquidation of the excavation by backfilling has a significant role in reducing uncontrolled air migration through the closed pits and gobs at higher levels, and thus, reducing the risk of spontaneous fire. Air migration through gobs cause lower air delivery in active drifts of mines' ventilation system and limit air flow through gobs, and thereby reduce spontaneous fire risks. The effectiveness of the use of ash and water mixture in longwall sealing technologies is affected by many conditions, among others (Krause et al., 2009):

- the location of ash and water mixture application to the gobs,
- the fluidity of the ash and water mixture depending on the gobs slope and ratio of water to ash,
- drifts leveling on the outline of void gobs,
- the type of rocks forming direct caving in the gobs affecting the fluidity of the ash and water mixtures.

Technologies used in energetics directed at the reduction of nitrogen oxides (NO_x) released into the atmosphere, caused an increase in the ammonia content in the fly ash. The issues raised in the article refer to possible ammonia risks which discharges from the ash and water mixture used in underground mining.

Many factors influence the gas risks caused by ammonia release from the ash and water mixture, including the following:

- the rate of water to ash in the used mixture,
- the ash and water mixture application site ambient temperature,
- the cubage of the applied ash and water mixture per unit of time.

The Department of Environmental Monitoring of the Central Mining Institute conducted research aimed at the determination of ammonia stream size released from the ash and water mixture at varied temperatures and at different proportions of water to ash (Drobek, Borecki, & Bauerek, 2013).

The effectiveness of the fire prevention used, involving the sealing of longwall gobs by ash and water mixtures, determines both the adopted operation system, as well as the ventilation.

The results of the laboratory research on ammonia release from the ash and water mixture were assigned to the mixture application in the gobs ventilated by U-tube method on the body of coal. About 75% of all longwalls in Polish mines are ventilated by this method.

The fact that the ammonia releasing from the ash and water mixture during this method of ventilation migrates from the gobs to the area of the intersection of the ventilation gangway is relevant to ammonia risks. The ammonia risk assessment conducted in this article refers to the longwalls ventilated by the U-tube method on the body of coal, where the ventilation gangway in the area of the intersection with the longwall may create a risk of ammonia content exceeding the allowable limit.

2. LABORATORY RESEARCH ON AMMONIA RELEASE FROM THE ASH AND WATER MIXTURE

Neutralization technology of nitrogen oxides (NO_x) from exhaust gas in the denitrification process by the SCR or SNCR method is connected with fly ash which releases ammonia in an amount of approximately 20 ppm, i.e. 0.002 wt% NH_3 in 1 kg of ash, which corresponds to 26.36 dm³ of pure NH_3 per 1000 kg of ash (Drobek et al., 2013). The method, currently being used, of SNCR denitrification guarantees a maximum ammonia content in dry energy production waste of up to 50 ppm, i.e. 65.9 dm³ of pure NH_3 at 1000 kg ash. Given this state of affairs, it is advisable to conduct an assessment of the formation of ammonia gas hazards in excavations which are connected by the ventilation system with the areas of application of ash and water mixture.

The study of ammonia release from the ash and water mixture should take into account the temperature range of the mixture that will affect the size of the gas stream - ammonia released to the drifts into the surrounding of the workings where this process is applied (e.g., operating longwall gobs). Within the Upper Silesian Coal Basin, located in the southern part of Poland, the virgin rock temperature (VRT) as a function of depth and geothermal gradient is about one degree Celsius for each 33 meters in depth. At a depth of 25 m below the surface the VRT stands at 8°C, and as the depth increases the VRT increase is a function of geothermal gradient. At a depth of 1225 m below the surface the virgin rock temperature within the Upper Silesian Coal Basin is ca. 44°C. Taking into account the initial temperature of the rocks rising from the depth of the mine and the exploitation of a mines ultimate perspective at this depth, the research should include a temperature range of 23–45°C of the ash and water mixture.

The ratio of the ash to process water in the mixture of ash and water may vary. Depending upon the ratio of water to ash water/solid ratio = 1 dm³ of water / kg of ash = W/S

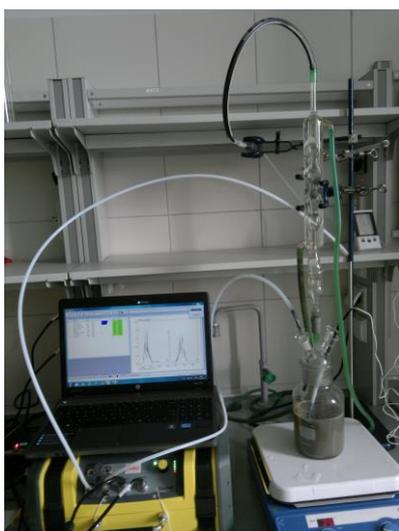
Ammonia discharge studies were performed at a ratio of water to ash in the range of 2.0–0.75. Results of the study led to the determination of the size of streams released in gaseous ammonia from the ash and water mixture, dissolved in the hydromixture aqueous phase and residual ammonia in the water drained from the mixture of ash and water (Drobek et al., 2013). The separation of these streams reduces free gas flow discharged from the ash and water mixture. The volume of ash in the mixture applied to the gobs and NH_3 gas volume contained in 1 Mg (megagram) dry ash enables the calculation of approximate stream of NH_3 released from the gobs to the excavation as a result of the application of the ash-water mixture.

The tests were performed for three ranges of temperature, which reflect changes in the ambient gobs' temperature, and hence the temperature of the mixture of the ash and water as a result of its application to gobs to the constant amount of water and variable quantities of ash supply. Tests for the six W/S ratios (Table 1) were performed in order to determine the emission of ammonia from the mixture of ash and water.

Table 1. Different W/S ratios of the ash-water mixture used in ammonia discharge studies

1 dm ³ of water / kg of ash quantity	W/S
1 dm ³ water / 0.50 kg ash	2.0
1 dm ³ water / 0.57 kg ash	1.75
1 dm ³ water / 0.66 kg ash	1.5
1 dm ³ water / 0.80 kg ash	1.25
1 dm ³ water / 1.00 kg ash	1.0
1 dm ³ water / 1.33 kg ash	0.75

The measurements used a closed circuit gas system with a total volume of 2000 cm³, consisting of a mixer, a cooling system of the steam gas, and a computer-controlled gas analyzer with a detector operating in the infrared spectrum (FTIR) (Fig. 1).

**Fig. 1.** Research reactor for the determination of the ammonia released from an ash and water mixture

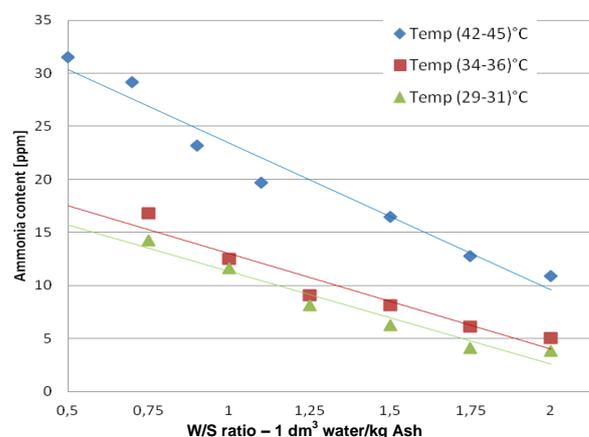
Total nitrogen content and ammonia content in the samples of ash were determined before each series of ammonia release measurements. Total nitrogen content was determined by Dumas method (combustion of a sample of known mass in a high temperature, 1030°C, chamber in the presence of oxygen) with the use of an automated nitrogen analyzer where ammonia content was determined by steam distillation followed by acidimetric titration, by using a modified Kjeldahl method. The total nitrogen content consists of: nitrates (III), nitrate (V), an organic nitrogen and ammonia nitrogen. The average assay of the total nitrogen was 751 mg/kg, where ammonium nitrogen was 18.6 mg/kg, which is about 2.5% of the total nitrogen content.

For each W/S ratio an analysis of ammonia concentration in the atmosphere above the surface of the mixture of ash and water was performed. Measurements of ammonia concentration in each series of measurements were performed in the reactor every 20 seconds for at least 60 minutes.

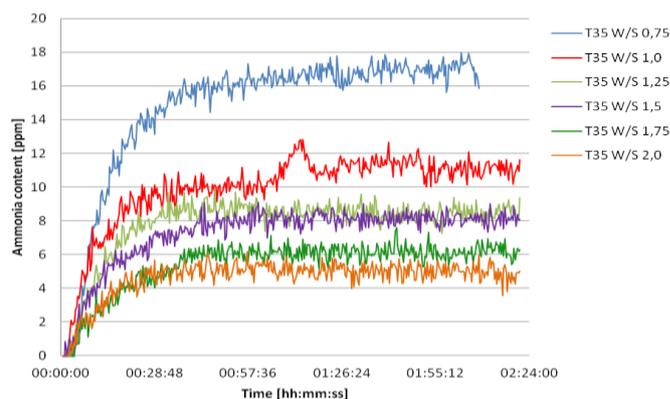
The maximum values of ammonia content released in the production of the ash-water mixtures, depending on the W/S, is shown in Figure 2. The levels of these concentrations were reached after a minimum of 45 minutes of the experiment had been carried out.

By reducing the amount of water in the mixture of ash and water, the ammonia concentration increases in a unit volume of water, which increases the flow of NH₃ being discharged

from the mixture. The total amount of released ammonia increases with the increase in the ambient temperature of the application area of the mixture.

**Fig. 2.** Variation of ammonia gas release with ash-water mixture ratios at different test temperature ranges

Development of the ammonia concentration released from the mixture of ash and water in the assumed period of about 2.5 hours, in the ratio W/S of 2.0–0.75, at an operating reactor temperature of 34–36°C, is shown in Figure 3.

**Fig. 3.** The concentration level of ammonia discharged from the hydromixture in proportion W/S = 2.0–0.75 in the accepted time of 2.5 hours

Increasing the amount, by weight, of the ash to the same amount of water, thus reducing the W/S ratio in a mixture of ash and water, leads to a higher intensity of emission of ammonia in a short period of time.

The concentration of gaseous ammonia was marked at 11 ppm NH₃ at normal conditions in the range of 42–45°C temperature for the W/S ratio 2.0. A twice greater amount of ash in the hydromixture, for the W/S ratio of 1.1 at a temperature of 42–45°C, resulted in twice the ammonia emission. During the test of 2 kg of ash in 1 dm³ of water (W/S 0.5) the ammonia emission to the gas phase was determined at about 30 ppm NH₃.

With the increase in temperature of the mixture of ash and water, ammonia release also increases. At a temperature of 29–31°C, for the W/S ratio 1.5, the concentration of gaseous ammonia was about 6 ppm NH₃, at a temperature of 34–36°C, 8.2 ppm of NH₃, while at a temperature of 42–45°C, the NH₃ release is 16.5 ppm, which is almost twice as much as that at a temperature range of 34–36°C.

An increase in the amount of ammonia released into the gas phase was due to the greater amount of ammonium salts dissolved in the aqueous phase hydromixture. The determined ammonia concentration in the aqueous solution after the test at a temperature of 42–45°C ranged from 3.5 mg NH_3/dm^3 , for the W/S 2.0 mixture, to 16.4 mg NH_3/dm^3 , for the W/S 0.5 mixture.

3. RISK OF GASEOUS AMMONIA IN THE LONGWALL MINING FACE VENTILATED WITH A U-TUBE VENTILATION SYSTEM

The level of the ash and water mixture, applied to the gobs, causes ammonia release in gaseous form.

The size of the stream is not without significance for the level of risk, due to the release of gaseous ammonia in the excavation area. This depends on the saturation of ash by ammonia being affected by the technology used, the volume of ash applied to the gobs in a specified time range, used the gobs' sludging and ammonia release time.

The mixture of ash and water release, aside from ammonia, gases such as: carbon dioxide, carbon monoxide, acetylene, hydrogen, ethylene, propylene, and other aromatic hydrocarbons. These gases fill the voids and migrate to the active drifts connected with the area of mixture application by a ventilation system.

A ventilation system influences the distribution of ammonia concentration from the gobs to drifts. Currently in Polish coal mines two ventilation methods dominate, i.e. the U-tube method on the body of coal and the "Y" method with the disposal of the air along the front wall.

The article analyses gas hazard resulting from gaseous ammonia in the longwalls with a U-tube method of ventilation on the body of coal. Air "leaks" of gobs Q_{gob} in this ventilation method represent about 20% of the total amount of air supplied to the longwall Q_{air} . In terms of technology applications of the mixture of ash and water, releasing ammonia will be carried out with "leaking" air Q_{gob} to the intersection area of the ventilation gangway (Fig. 4).

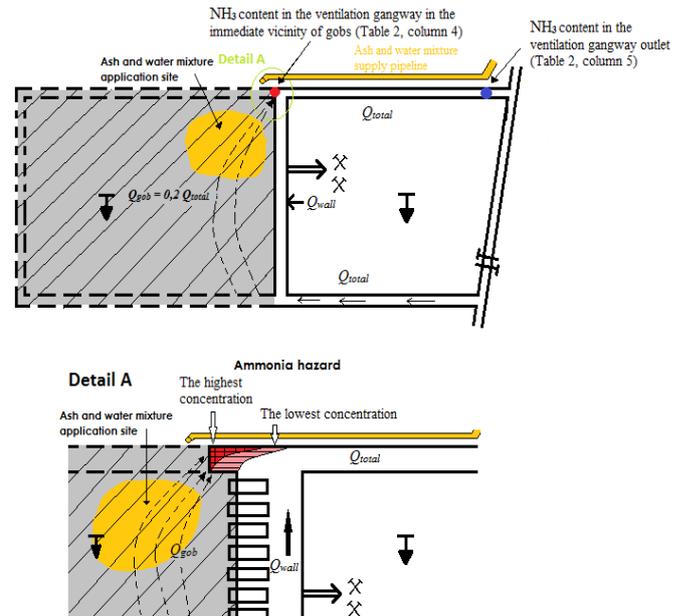


Fig. 4. Probable development of the ammonia threat at longwalls ventilated by a U-tube method on the body of coal

Ammonia migrating with air "leaks" to the lift could pose a threat to the crew employed on a ventilation gangway, where the U-tube method of ventilation is applied (Fig. 4).

The gas-ventilation analysis during the U-tube method of ventilation assumed air flow supplied to the wall were in the range of 300–2100 m^3/min . A value of 20% air migration to the gobs Q_{gob} in the range of 60–420 m^3/min was calculated to the adopted range of air delivery to the longwall.

When applying the ash and water mixture at ratio W/S = 0.5 to gobs with ash volumes of 100 Mg, 3.16 dm^3 pure NH_3 is released. Column 4 of Table 2 shows the calculated concentration of ammonia in the immediate vicinity of gobs for the range of air supplied to the wall of 300–2100 m^3/min . NH_3 concentration at the outlet of the vent gangway was summarized in column 5 of Table 2.

Table 2. Calculated content of ammonia in the ventilation gangway in the immediate vicinity of gobs by the gangway outlet, for air delivered to the longwall, in the range 300 to 2100 m^3/min

Air delivery Q_{total} supplied to the longwall [m^3/min]	Air leaks through gobs $0.2 Q_{\text{total}}$ [m^3/min]	Emissions of NH_3 from 100 Mg application of the ash and water mixture to the gobs [$\text{dm}^3 \text{NH}_3/100 \text{ Mg}$]	The concentration of NH_3 in the gangway in the vicinity of gobs [ppm]	The concentration of NH_3 at the outlet of the vent gangway [ppm]
1	2	3	4	5
300	60	3.16	52	10.5
500	100		31.6	6.3
700	140		22.5	4.5
900	180		17.5	3.5
1100	220		14.4	2.9
1300	260		12.1	2.4
1500	300		10.5	2.1
1700	340		9.2	1.8
1900	380		8.3	1.6
2100	420		7.5	0.7

The irritant effect on the value of the maximum allowable concentration (MAC) of ammonia, as a weighted average for an 8-hour working day, is 14 mg/m^3 (19.74 ppm), and the value of the maximum permissible instantaneous concentration, defined as exposure of no more than 15 minutes and not more than 2 times during a working shift with intervals of not less than 1 hour, is 28 mg/m^3 (39.48 ppm) (Rozporządzenie, 2002).

Listed values in columns 4 and 5 of the calculated concentrations of NH_3 confirm that the application of the ash and water mixture to the gobs, ventilated by the U-tube method, may cause exceeded levels of ammonia in excavations in the immediate vicinity of gobs.

4. CONCLUSION

The results of laboratory research of ammonia discharge from the ash and water mixture and the ventilation and gas analysis of gaseous ammonia from mixtures of ash and water to the walls ventilated using the U-tube method on the body of coal, allow us to present the following conclusion:

- mining technologies using fly ash, created in NO_x reduction systems, can cause gas hazards by gaseous ammonia release into the ventilation air of mine drifts,
- gas hazards may occur as a result of ammonia release to mine air from the mixture of ash and water used in applied technologies, which result in exceeding the permissible concentrations,
- ammonia gas hazards may occur at ventilation gangways with the U-tube ventilation method on the body of coal, mainly in the vicinity of gobs behind the longwall face,
- the distribution of ammonia concentration in the immediate vicinity of gobs at ventilation gangways with the U-tube ventilation method may lead to the levels of ammonia in the air exceeding permitted levels,
- ammonia content at the outlet of ventilation gangways will not exceed the limit values regulations, regardless of the ventilation method.

Acknowledgements

The research was carried out within the framework of the statutory work of the Central Mining Institute in Katowice (Poland) entitled: Studies of fly ash contaminated with ammonia after denitrification process for possible utilization in underground mining, No. 11420444-331.

References

- Cygankiewicz, K., Wierzbinski, K., & Łukowicz, K. (2010). Problematyka stosowania mieszanin i spoiw mineralnych w podziemnych zakładach górniczych [The issue of of mineral mixtures and binders use in underground mines]. In W. Dziurzyński (Ed.), *Model bezpiecznej eksploatacji górniczej w warunkach kumulacji i koincydencji zagrożeń wentylacyjnych, metanowych i pożarowych* (pp. 127–188). Kraków: Instytut Mechaniki Górotworu PAN.
- Drobek, L., Borecki, T., & Bauerek, A. (2013). *Ocena wydzielania się amoniaku z odpadów paleniskowych po procesie denitryfikacji SNCR* [Assessment of ammonia release from combustion waste in the process of SNCR denitrification] (unpublished documentation No 58247523-331). Katowice: Główny Instytut Górnictwa.
- Krause, E., & Piotrowski, Z. (1997). Gospodarcze wykorzystanie popiołów z instalacji półsuchego odsiarczania spalin z elektrowni Łaziska i Rybnik w pilotujących technologiach, w wyrobiskach podziemnych kopalń [The economic use of the ash of semi-dry flue gas desulfurization installation of the power plant in Rybnik Łaziska and pilot technologies in underground mines]. In *Materiały Szkoły Gospodarki Odpadami, Rytno, 3–7 listopada 1997* (pp. 31–42). Kraków: Centrum Podstawowych Problemów Gospodarki Surowcami Mineralnymi i Energią PAN.
- Krause, E., Łukowicz, K., & Piotrowski, Z. (2009). Wpływ fizycznych własności popiołów lotnych na poziom zagrożenia metanowego i pożarowego w polach eksploatacyjnych [The influence the physical properties of fly ash on the methane level and fire hazard in the mining activities areas]. In *XVI Międzynarodowa Konferencja Naukowo-Techniczna: Górnicze Zagrożenia Naturalne 2009. Technika wiertnicza i strzałowa a zagrożenia górnicze, Targanice k/Żywca, 3–6 listopada 2009 r.* (pp. 140–149). Katowice: Główny Instytut Górnictwa.
- Krause, E. (2009). Ocena i zwalczanie zagrożenia metanowego w kopalniach węgla kamiennego [Assessment and control of methane hazard in hard coal mines]. *Prace Naukowe Głównego Instytutu Górnictwa* (878), 1–178.
- Rozporządzenie Ministra Pracy i Polityki Społecznej w sprawie najwyższych dopuszczalnych stężeń i natężeń czynników szkodliwych dla zdrowia w środowisku pracy z dnia 29 listopada 2002 r. (2002). [Regulation of the Minister of Labour and Social Policy on the maximum permissible concentrations and intensities of harmful factors in the work environment of 29 November 2002]. *Dziennik Ustaw* Nr 217, poz. 1833.