

GREEN'S FUNCTION IN FREE AXISYMMETRIC VIBRATION ANALYSIS OF ANNULAR THIN PLATES WITH DIFFERENT BOUNDARY CONDITIONS

K.K. ŻUR

Faculty of Management
Bialystok University of Technology
2 Ojca Stefana Tarasiuka St., 16-001 Kleosin, POLAND
E-mail: k.zur@pb.edu.pl

Free vibration analysis of homogeneous and isotropic annular thin plates by using Green's functions is considered. The formula of the influence function for uniform thin circular and annular plates is presented in closed-form. The limited independent solutions of differential Euler equation were expanded in the Neumann power series based on properties of integral equations. The analytical frequency equations as power series were obtained using the method of successive approximations. The natural axisymmetric frequencies for singularities when the core radius approaches zero are calculated. The results are compared with selected results presented in the literature.

Key words: annular plates, Green's function, singularities.

1. Introduction

The study of the vibration of a thin annular plate is basic in structural mechanics because it has many applications in civil and mechanical engineering. Circular and annular plates are the most critical structural elements in high speed rotating engineering systems. The natural frequencies of the circular and annular plates have been studied extensively for more than a century. Since the frequency of external load matches the natural frequency of the plate, destruction may occur.

The free vibration of annular plates has received considerable attention in the literature. The vibration of annular plates has been discussed by many authors (Vogel and Skinner, 1965; Ramaiah, 1980; Vera *et al.*, 1998; Gabrielson, 1999). The work of Leissa (1969) is an excellent source of information about methods used for free vibration analysis of plates. Free vibration analysis has been carried out by using a variety of weighting function methods (Leissa, 1969) such as the Ritz method, the Galerkin method or the finite element method. Kim and Dickinson (1989) made studied lateral vibration of a thin annular plate subject to certain complicating effects. Wang *et al.* (1993) free vibration analysis of thin annular plates using the differential quadrature method (DQM). Liu *et al.* (2000) studied the effect of satisfying stress boundary conditions in the axisymmetric vibration analysis of circular and annular plates. Wang and Wang (2005) analyzed the fundamental frequencies of annular plates with small core. Kukla and Szewczyk (2006) analyzed axisymmetric natural frequencies of annular plates with elastic concentric supports using Green's functions. Taher *et al.* (2006) studied free vibration of circular and annular plates with variable thickness and different combinations of boundary conditions. Zhou *et al.* (2011) analyzed natural vibration of thin circular and annular plates by Hamiltonian approach. Wang (2014) studied vibration modes of concentrically supported free circular and annular plates.

In the present study Green's functions (GF) are used to obtain axisymmetric natural frequencies of annular plates. The formula of influence function for uniform annular (circular) plates is obtained in closed-form. The characteristic equations for different boundary conditions such as free, clamped, simply supported,

sliding for inner and outer edges of plates are obtained for different values of core radius. The numerical results of the investigation are compared with selected results presented in open literature.

2. Statement of the problem

Consider an isotropic, homogeneous annular thin plate of constant thickness h in cylindrical coordinate (r, θ, z) with the z -axis along the longitudinal direction. The geometry and coordinate system of the plate is shown in Fig.1. The partial differential equation for free vibration of thin uniform annular (circular) plates has the following form

$$\nabla^4 W + \frac{\rho h}{D} \frac{\partial^2 W}{\partial t^2} = 0 \quad (2.1)$$

where ρ is the mass density, $D = Eh^3/12(1-\nu^2)$ is the flexural rigidity, E is Young's modulus, ν is the Poisson ratio, $\nabla^2 = \frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} + \frac{1}{r^2} \frac{\partial^2}{\partial \theta^2}$ is the Laplacian and $W(r, \theta, t)$ is the small deflection compared with the thickness h of the plate. For free axisymmetric vibration of annular plates $\Theta = 0$.

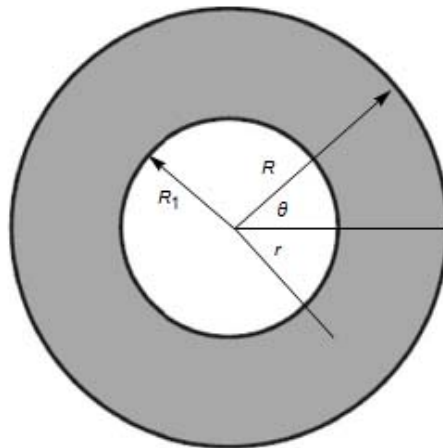


Fig.1. Geometry and coordinate system of the annular plate.

The axisymmetric deflection of an annular plate may be expressed as follows

$$W = w(r)e^{i\omega t} \quad (2.2)$$

where $w(r)$ is the radial mode function, ω is natural frequency, and $i^2 = -1$. Substituting Eq.(2.2) into Eq.(2.1) using the dimensionless coordinate $\xi = r/R$, the governing differential equation of the annular (circular) plate becomes

$$L(w) - \lambda^2 w = 0 \quad (2.3)$$

where

$$L(w) \equiv \frac{d^4 w}{d\xi^4} + \frac{2}{\xi} \frac{d^3 w}{d\xi^3} - \frac{1}{\xi^2} \frac{d^2 w}{d\xi^2} + \frac{1}{\xi^3} \frac{dw}{d\xi}, \quad (2.4)$$

is the differential operator and

$$\lambda = \omega R^2 \sqrt{\rho h / D}, \quad (2.5)$$

is the dimensionless frequency of vibration.

The boundary conditions at the inner edge ($\xi = R_I / R = \xi_I$) of the annular plate may be one of the following: clamped, simply supported, free and sliding supports. These conditions may be written in terms of the radial mode function $w(\xi)$ in the following form:

Clamped

$$w(\xi)|_{\xi=\xi_I} = 0, \quad (2.6a)$$

$$\frac{dw}{d\xi}|_{\xi=\xi_I} = 0. \quad (2.6b)$$

Simply supported

$$w(\xi)|_{\xi=\xi_I} = 0, \quad (2.7a)$$

$$M(w)|_{\xi=\xi_I} = \left(\frac{d^2 w}{d\xi^2} + \frac{v}{\xi} \frac{dw}{d\xi} \right)_{\xi=\xi_I} = 0. \quad (2.7b)$$

Free

$$M(w)|_{\xi=\xi_I} = 0, \quad (2.8a)$$

$$V(w)|_{\xi=\xi_I} = \left(\frac{d^3 w}{d\xi^3} + \frac{1}{\xi} \frac{d^2 w}{d\xi^2} - \frac{1}{\xi^2} \frac{dw}{d\xi} \right)_{\xi=\xi_I} = 0. \quad (2.8b)$$

Sliding (vertical) supports

$$\frac{dw}{d\xi}|_{\xi=\xi_I} = 0, \quad (2.9a)$$

$$V(w)|_{\xi=\xi_I} = 0. \quad (2.9b)$$

$M(w)$ and $V(w)$ are the normalized radial bending moment and the normalized effective shear force, respectively. Similar boundary conditions may be defined for the outer edge ($\xi = 1$) depending on the type of support of annular plates.

3. Finding Green's function

The characteristic equation of homogeneous differential Euler equation for thin annular (circular) plates

$$L(w) \equiv \frac{d^4 w}{d\xi^4} + \frac{2}{\xi} \frac{d^3 w}{d\xi^3} - \frac{1}{\xi^2} \frac{d^2 w}{d\xi^2} + \frac{1}{\xi^3} \frac{dw}{d\xi} = 0, \quad (3.1)$$

has the following form

$$s^4 - 4s^3 + 4s^2 = 0. \quad (3.2)$$

The roots of Eq.(3.2) have the form

$$s_1 = s_2 = 0; \quad s_3 = s_4 = 2. \quad (3.3)$$

Based on properties of Euler differential equations, the linear independent solutions of Eq.(3.1) have the form

$$w_1(\xi) = I; \quad w_2(\xi) = \xi^2; \quad w_3(\xi) = \xi \ln \xi; \quad w_4(\xi) = \xi^2 \ln \xi. \quad (3.4)$$

Green's function (general solution of Eq.(3.1)) may be received from the formula presented in the following form (Tricomi, 1957)

$$K(\xi, \alpha) = \frac{|A|}{W(\alpha)p_0(\alpha)} \quad (3.5)$$

where $p_0(\alpha) = 1$ is the coefficient placed before the highest order of derivative of Euler differential Eq.(3.1),

$$|A| = \begin{vmatrix} 1 & \alpha^2 & \alpha \ln \alpha & \alpha^2 \ln \alpha \\ 0 & \frac{d(\alpha^2)}{d\alpha} & \frac{d(\alpha \ln \alpha)}{d\alpha} & \frac{d(\alpha^2 \ln \alpha)}{d\alpha} \\ 0 & \frac{d^2(\alpha^2)}{d\alpha^2} & \frac{d^2(\alpha \ln \alpha)}{d\alpha^2} & \frac{d^2(\alpha^2 \ln \alpha)}{d\alpha^2} \\ 1 & \xi^2 & \xi \ln \xi & \xi^2 \ln \xi \end{vmatrix}, \quad (3.6)$$

$$W(\alpha) = \begin{vmatrix} 1 & \alpha^2 & \alpha \ln \alpha & \alpha^2 \ln \alpha \\ 0 & \frac{d(\alpha^2)}{d\alpha} & \frac{d(\alpha \ln \alpha)}{d\alpha} & \frac{d(\alpha^2 \ln \alpha)}{d\alpha} \\ 0 & \frac{d^2(\alpha^2)}{d\alpha^2} & \frac{d^2(\alpha \ln \alpha)}{d\alpha^2} & \frac{d^2(\alpha^2 \ln \alpha)}{d\alpha^2} \\ 0 & \frac{d^3(\alpha^2)}{d\alpha^3} & \frac{d^3(\alpha \ln \alpha)}{d\alpha^3} & \frac{d^3(\alpha^2 \ln \alpha)}{d\alpha^3} \end{vmatrix}. \tag{3.7}$$

Functions $1, \alpha^2, \alpha \ln \alpha, \alpha^2 \ln \alpha$ are linear independent solutions, then the Wronskian satisfies the condition $W(\alpha) \neq 0$.

After calculations, Green's function (GF) has the following form

$$K(\xi, \alpha) = \frac{\alpha}{4} \left[\alpha^2 - \xi^2 + (\xi^2 + \alpha^2)(\ln \xi - \ln \alpha) \right], \tag{3.8}$$

and satisfies conditions

$$K(\alpha, \alpha) = \frac{\partial K(\xi, \alpha)}{\partial \xi} \Big|_{\xi=\alpha} = \frac{\partial^2 K(\xi, \alpha)}{\partial \xi^2} \Big|_{\xi=\alpha} = 0, \tag{3.9a}$$

$$\frac{\partial^3 K(\xi, \alpha)}{\partial \xi^3} \Big|_{\xi=\alpha} = 1, \tag{3.9b}$$

according to the properties of influence functions (Kukla, 2009).

4. Solution of the problem

Based on the method of successive approximations and properties of integral equations, the limited solutions were expanded in the Neumann power series (Tricomi, 1957) in the following form

$$K(\xi)_u = K_0(\xi)_u + \sum_{i=1}^n K_i(\xi)_u \cdot \lambda^{2i}, \quad \lambda \in \mathfrak{R}^+, \tag{4.1a}$$

$$K(\xi)_v = K_0(\xi)_v + \sum_{i=1}^n K_i(\xi)_v \cdot \lambda^{2i}, \tag{4.1b}$$

$$K(\xi)_{u_l} = K_0(\xi)_{u_l} + \sum_{i=1}^n K_i(\xi)_{u_l} \cdot \lambda^{2i}, \tag{4.1c}$$

$$K(\xi)_{v_l} = K_0(\xi)_{v_l} + \sum_{i=1}^n K_i(\xi)_{v_l} \cdot \lambda^{2i} \tag{4.1d}$$

where $K_i(\xi)_u, K_i(\xi)_v, K_i(\xi)_{u_l}$ and $K_i(\xi)_{v_l}$ are iterated kernels defined in the following form

$$K_i(\xi)_u = \int_0^\xi K(\xi, \alpha) K_{i-1}(\alpha)_u d\alpha, \quad K_0(\alpha)_u = 1, \tag{4.2a}$$

$$K_i(\xi)_v = \int_0^\xi K(\xi, \alpha)K_{i-1}(\alpha)_v d\alpha, \quad K_0(\alpha)_v = \alpha^2, \tag{4.2b}$$

$$K_i(\xi)_{u_l} = \int_0^\xi K(\xi, \alpha)K_{i-1}(\alpha)_{u_l} d\alpha, \quad K_0(\alpha)_{u_l} = \alpha \ln \alpha, \tag{4.2c}$$

$$K_i(\xi)_{v_l} = \int_0^\xi K(\xi, \alpha)K_{i-1}(\alpha)_{v_l} d\alpha, \quad K_0(\alpha)_{v_l} = \alpha^2 \ln \alpha. \tag{4.2d}$$

Using condition for non-zero values for integral constants, the characteristic equations for different boundary conditions for considering annular plates have the following form:

Clamped inner edge and free outer edge

$$\Delta(\lambda) \equiv \begin{vmatrix} M[K(\xi)_u]_{|\xi=l} & M[K(\xi)_v]_{|\xi=l} & M[K(\xi)_{u_l}]_{|\xi=l} & M[K(\xi)_{v_l}]_{|\xi=l} \\ V[K(\xi)_u]_{|\xi=l} & V[K(\xi)_v]_{|\xi=l} & V[K(\xi)_{u_l}]_{|\xi=l} & V[K(\xi)_{v_l}]_{|\xi=l} \\ K(\xi)_u|_{\xi=\xi_l} & K(\xi)_v|_{\xi=\xi_l} & K(\xi)_{u_l}|_{\xi=\xi_l} & K(\xi)_{v_l}|_{\xi=\xi_l} \\ \frac{dK(\xi)_u}{d\xi}|_{\xi=\xi_l} & \frac{dK(\xi)_v}{d\xi}|_{\xi=\xi_l} & \frac{dK(\xi)_{u_l}}{d\xi}|_{\xi=\xi_l} & \frac{dK(\xi)_{v_l}}{d\xi}|_{\xi=\xi_l} \end{vmatrix} = \Lambda_0 = 0; \tag{4.3}$$

Simply supported inner edge and free outer edge

$$\Delta(\lambda) \equiv \begin{vmatrix} M[K(\xi)_u]_{|\xi=l} & M[K(\xi)_v]_{|\xi=l} & M[K(\xi)_{u_l}]_{|\xi=l} & M[K(\xi)_{v_l}]_{|\xi=l} \\ V[K(\xi)_u]_{|\xi=l} & V[K(\xi)_v]_{|\xi=l} & V[K(\xi)_{u_l}]_{|\xi=l} & V[K(\xi)_{v_l}]_{|\xi=l} \\ K(\xi)_u|_{\xi=\xi_l} & K(\xi)_v|_{\xi=\xi_l} & K(\xi)_{u_l}|_{\xi=\xi_l} & K(\xi)_{v_l}|_{\xi=\xi_l} \\ M[K(\xi)_u]_{|\xi=\xi_l} & M[K(\xi)_v]_{|\xi=\xi_l} & M[K(\xi)_{u_l}]_{|\xi=\xi_l} & M[K(\xi)_{v_l}]_{|\xi=\xi_l} \end{vmatrix} = \Lambda_0 = 0; \tag{4.4}$$

Sliding inner edge and free outer edge

$$\Delta(\lambda) \equiv \begin{vmatrix} M[K(\xi)_u]_{|\xi=l} & M[K(\xi)_v]_{|\xi=l} & M[K(\xi)_{u_l}]_{|\xi=l} & M[K(\xi)_{v_l}]_{|\xi=l} \\ V[K(\xi)_u]_{|\xi=l} & V[K(\xi)_v]_{|\xi=l} & V[K(\xi)_{u_l}]_{|\xi=l} & V[K(\xi)_{v_l}]_{|\xi=l} \\ \frac{dK(\xi)_u}{d\xi}|_{\xi=\xi_l} & \frac{dK(\xi)_v}{d\xi}|_{\xi=\xi_l} & \frac{dK(\xi)_{u_l}}{d\xi}|_{\xi=\xi_l} & \frac{dK(\xi)_{v_l}}{d\xi}|_{\xi=\xi_l} \\ V[K(\xi)_u]_{|\xi=\xi_l} & V[K(\xi)_v]_{|\xi=\xi_l} & V[K(\xi)_{u_l}]_{|\xi=\xi_l} & V[K(\xi)_{v_l}]_{|\xi=\xi_l} \end{vmatrix} = \Lambda_0 = 0 \tag{4.5}$$

Free inner edge and clamped outer edge

$$\Delta(\lambda) \equiv \begin{vmatrix} M[K(\xi)_u]_{|\xi=\xi_l} & M[K(\xi)_v]_{|\xi=\xi_l} & M[K(\xi)_{u_l}]_{|\xi=\xi_l} & M[K(\xi)_{v_l}]_{|\xi=\xi_l} \\ V[K(\xi)_u]_{|\xi=\xi_l} & V[K(\xi)_v]_{|\xi=\xi_l} & V[K(\xi)_{u_l}]_{|\xi=\xi_l} & V[K(\xi)_{v_l}]_{|\xi=\xi_l} \\ K(\xi)_u|_{\xi=l} & K(\xi)_v|_{\xi=l} & K(\xi)_{u_l}|_{\xi=l} & K(\xi)_{v_l}|_{\xi=l} \\ \frac{dK(\xi)_u}{d\xi}|_{\xi=l} & \frac{dK(\xi)_v}{d\xi}|_{\xi=l} & \frac{dK(\xi)_{u_l}}{d\xi}|_{\xi=l} & \frac{dK(\xi)_{v_l}}{d\xi}|_{\xi=l} \end{vmatrix} = \Lambda_0 = 0; \quad (4.6)$$

Free inner edge and simply supported outer edge

$$\Delta(\lambda) \equiv \begin{vmatrix} M[K(\xi)_u]_{|\xi=\xi_l} & M[K(\xi)_v]_{|\xi=\xi_l} & M[K(\xi)_{u_l}]_{|\xi=\xi_l} & M[K(\xi)_{v_l}]_{|\xi=\xi_l} \\ V[K(\xi)_u]_{|\xi=\xi_l} & V[K(\xi)_v]_{|\xi=\xi_l} & V[K(\xi)_{u_l}]_{|\xi=\xi_l} & V[K(\xi)_{v_l}]_{|\xi=\xi_l} \\ K(\xi)_u|_{\xi=l} & K(\xi)_v|_{\xi=l} & K(\xi)_{u_l}|_{\xi=l} & K(\xi)_{v_l}|_{\xi=l} \\ M[K(\xi)_u]_{|\xi=l} & M[K(\xi)_v]_{|\xi=l} & M[K(\xi)_{u_l}]_{|\xi=l} & M[K(\xi)_{v_l}]_{|\xi=l} \end{vmatrix} = \Lambda_0 = 0; \quad (4.7)$$

Free inner edge and sliding outer edge

$$\Delta(\lambda) \equiv \begin{vmatrix} M[K(\xi)_u]_{|\xi=\xi_l} & M[K(\xi)_v]_{|\xi=\xi_l} & M[K(\xi)_{u_l}]_{|\xi=\xi_l} & M[K(\xi)_{v_l}]_{|\xi=\xi_l} \\ V[K(\xi)_u]_{|\xi=\xi_l} & V[K(\xi)_v]_{|\xi=\xi_l} & V[K(\xi)_{u_l}]_{|\xi=\xi_l} & V[K(\xi)_{v_l}]_{|\xi=\xi_l} \\ \frac{dK(\xi)_u}{d\xi}|_{\xi=l} & \frac{dK(\xi)_v}{d\xi}|_{\xi=l} & \frac{dK(\xi)_{u_l}}{d\xi}|_{\xi=l} & \frac{dK(\xi)_{v_l}}{d\xi}|_{\xi=l} \\ V[K(\xi)_u]_{|\xi=l} & V[K(\xi)_v]_{|\xi=l} & V[K(\xi)_{u_l}]_{|\xi=l} & V[K(\xi)_{v_l}]_{|\xi=l} \end{vmatrix} = \Lambda_0 = 0; \quad (4.8)$$

Free inner and outer edge

$$\Delta(\lambda) \equiv \begin{vmatrix} M[K(\xi)_u]_{|\xi=l} & M[K(\xi)_v]_{|\xi=l} & M[K(\xi)_{u_l}]_{|\xi=l} & M[K(\xi)_{v_l}]_{|\xi=l} \\ V[K(\xi)_u]_{|\xi=l} & V[K(\xi)_v]_{|\xi=l} & V[K(\xi)_{u_l}]_{|\xi=l} & V[K(\xi)_{v_l}]_{|\xi=l} \\ M[K(\xi)_u]_{|\xi=\xi_l} & M[K(\xi)_v]_{|\xi=\xi_l} & M[K(\xi)_{u_l}]_{|\xi=\xi_l} & M[K(\xi)_{v_l}]_{|\xi=\xi_l} \\ V[K(\xi)_u]_{|\xi=\xi_l} & V[K(\xi)_v]_{|\xi=\xi_l} & V[K(\xi)_{u_l}]_{|\xi=\xi_l} & V[K(\xi)_{v_l}]_{|\xi=\xi_l} \end{vmatrix} = \Lambda_0 = 0; \quad (4.9)$$

Clamped inner and outer edge

$$\Delta(\lambda) \equiv \begin{vmatrix} K(\xi)_u|_{\xi=1} & K(\xi)_v|_{\xi=1} & K(\xi)_{u_I}|_{\xi=1} & K(\xi)_{v_I}|_{\xi=1} \\ \frac{dK(\xi)_u}{d\xi}|_{\xi=1} & \frac{dK(\xi)_v}{d\xi}|_{\xi=1} & \frac{dK(\xi)_{u_I}}{d\xi}|_{\xi=1} & \frac{dK(\xi)_{v_I}}{d\xi}|_{\xi=1} \\ K(\xi)_u|_{\xi=\xi_I} & K(\xi)_v|_{\xi=\xi_I} & K(\xi)_{u_I}|_{\xi=\xi_I} & K(\xi)_{v_I}|_{\xi=\xi_I} \\ \frac{dK(\xi)_u}{d\xi}|_{\xi=\xi_I} & \frac{dK(\xi)_v}{d\xi}|_{\xi=\xi_I} & \frac{dK(\xi)_{u_I}}{d\xi}|_{\xi=\xi_I} & \frac{dK(\xi)_{v_I}}{d\xi}|_{\xi=\xi_I} \end{vmatrix} = \Lambda_0 = 0; \tag{4.10}$$

Simply supported inner and outer edge

$$\Delta(\lambda) \equiv \begin{vmatrix} K(\xi)_u|_{\xi=1} & K(\xi)_v|_{\xi=1} & K(\xi)_{u_I}|_{\xi=1} & K(\xi)_{v_I}|_{\xi=1} \\ M[K(\xi)_u]|_{\xi=1} & M[K(\xi)_v]|_{\xi=1} & M[K(\xi)_{u_I}]|_{\xi=1} & M[K(\xi)_{v_I}]|_{\xi=1} \\ K(\xi)_u|_{\xi=\xi_I} & K(\xi)_v|_{\xi=\xi_I} & K(\xi)_{u_I}|_{\xi=\xi_I} & K(\xi)_{v_I}|_{\xi=\xi_I} \\ M[K(\xi)_u]|_{\xi=\xi_I} & M[K(\xi)_v]|_{\xi=\xi_I} & M[K(\xi)_{u_I}]|_{\xi=\xi_I} & M[K(\xi)_{v_I}]|_{\xi=\xi_I} \end{vmatrix} = \Lambda_0 = 0. \tag{4.11}$$

Sliding both edges

$$\Delta(\lambda) \equiv \begin{vmatrix} \frac{dK(\xi)_u}{d\xi}|_{\xi=\xi_I} & \frac{dK(\xi)_v}{d\xi}|_{\xi=\xi_I} & \frac{dK(\xi)_{u_I}}{d\xi}|_{\xi=\xi_I} & \frac{dK(\xi)_{v_I}}{d\xi}|_{\xi=\xi_I} \\ V[K(\xi)_u]|_{\xi=\xi_I} & V[K(\xi)_v]|_{\xi=\xi_I} & V[K(\xi)_{u_I}]|_{\xi=\xi_I} & V[K(\xi)_{v_I}]|_{\xi=\xi_I} \\ \frac{dK(\xi)_u}{d\xi}|_{\xi=1} & \frac{dK(\xi)_v}{d\xi}|_{\xi=1} & \frac{dK(\xi)_{u_I}}{d\xi}|_{\xi=1} & \frac{dK(\xi)_{v_I}}{d\xi}|_{\xi=1} \\ V[K(\xi)_u]|_{\xi=1} & V[K(\xi)_v]|_{\xi=1} & V[K(\xi)_{u_I}]|_{\xi=1} & V[K(\xi)_{v_I}]|_{\xi=1} \end{vmatrix} = \Lambda_0 = 0. \tag{4.12}$$

For all boundary conditions formula of Λ_0 has the following form

$$\Lambda_0 = a_0 + \sum_{i=1}^{\pi} (-1)^i a_i \lambda^{2i} \tag{4.13}$$

where a_0, a_1, \dots, a_{π} are coefficients of characteristic equations dependent on boundary conditions and parameter m .

5. Results

The numerical results for axisymmetric dimensionless frequencies of annular plates with different boundary conditions are presented in Tabs 1-3. The Neumann power series Eq.(4.1) were expanded for the degree of approximation $\eta = 30$ for all cases under consideration. The numerical results for free annular plates with different boundary conditions on the inner edge are shown in Tab.1 in comparison to Vera *et al.* (1998), Vogel and Skinner (1965). The dimensionless frequencies of annular plates with different boundary conditions on the outer edge and free inner edge are presented in Tab.2 in comparison to Zhou *et al.* (2011). The numerical results for annular plates with the same boundary conditions on both edges are shown in Tab.3 in comparison with Zhou *et al.* (2011).

Table 1. Axisymmetric dimensionless frequencies $\lambda = \omega R^2 \sqrt{\rho h_R / D_R}$ for free outer edge of annular plate with different conditions on the inner edge ($\eta = 30, \nu = 0.3$).

ξ_I	Dimensionless frequency, λ		Boundary conditions at the inner edge		
			Clamped	Simply supported	Sliding
0	λ_0	GF	3.7519	3.7519	9.003
		Ref.[13]	3.7520	3.7519	9.003
	λ_1	GF	20.908	20.908	38.443
	λ_2	GF	60.645	60.644	87.750
0.1	λ_0	GF	4.237	3.449	9.426
		Ref.[13]	4.237	3.449	9.425
		Ref.[14]	4.237	3.449	-
	λ_1	GF	25.262	20.889	41.684
		Ref.[13]	25.262	20.899	-
	λ_2	GF	73.900	64.202	97.480
0.2	λ_0	GF	5.181	3.339	10.675
		Ref.[13]	5.181	3.339	10.676
	λ_1	GF	32.291	24.797	49.955
		Ref.[13]	32.291	24.797	-
	λ_2	GF	94.084	79.073	119.61
	0.3	λ_0	GF	6.660	3.422
λ_1		GF	42.614	31.603	63.519
λ_2		GF	123.46	102.31	154.23
0.4	λ_0	GF	9.020	3.672	16.685
		Ref.[13]	9.020	3.672	16.685
		Ref.[14]	9.020	3.672	-
	λ_1	GF	58.549	42.556	85.206
	λ_2	GF	168.69	138.68	208.58
	0.5	λ_0	GF	13.024	4.120
Ref.[13]			13.024	4.120	23.189
λ_1		GF	85.032	61.009	121.69
λ_2		GF	243.71	199.34	298.45
0.7	λ_0	GF	36.953	6.187	62.152
		Ref.[13]	36.953	6.186	-
		Ref.[14]	36.953	6.186	-
	λ_1	GF	756.74	169.49	1449.1
	λ_2	GF	2059.05	730.13	6541.1
	0.8	λ_0	GF	84.499	8.892
Ref.[13]			84.500	8.892	-
λ_1		GF	494.49	205.74	246.57
λ_2		GF	789.61	492.53	291.72
0.9	λ_0	GF	167.38	17.113	168.41
	λ_1	GF	394.20	166.81	594.57
	λ_2	GF	739.59	393.63	794.96

Table 2. Axisymmetric dimensionless frequencies $\lambda = \omega R^2 \sqrt{\rho h_R / D_R}$ for free inner edge of annular plate with different boundary conditions on the outer edge ($\eta = 30, \nu = 0.33$).

ξ_I	Dimensionless frequency, λ		Boundary conditions at the outer edge		
			Clamped	Simply supported	Sliding
0	λ_0	GF	10.215	4.983	14.682
	λ_1	GF	39.771	29.758	49.218
	λ_2	GF	89.104	74.192	103.50
0.1	λ_0	GF	10.134	4.890	14.434
	λ_1	GF	39.378	29.370	48.959
	λ_2	GF	90.161	74.610	105.32
0.2	λ_0	GF	10.347	4.732	14.652
		Ref.[15]	10.347	4.732	-
	λ_1	GF	42.799	31.262	54.322
	λ_2	GF	104.71	85.546	123.68
0.3	λ_0	GF	11.338	4.659	16.153
	λ_1	GF	51.513	36.882	66.642
	λ_2	GF	132.14	107.25	151.09
0.4	λ_0	GF	13.500	4.743	19.486
		Ref.[15]	13.500	4.743	-
	λ_1	GF	66.925	47.303	87.817
	λ_2	GF	176.77	143.06	211.02
0.5	λ_0	GF	17.598	5.043	25.809
	λ_1	GF	93.605	65.680	124.16
	λ_2	GF	251.94	203.66	301.76
0.6	λ_0	GF	25.540	5.663	38.098
		Ref.[15]	25.541	5.663	-
	λ_1	GF	143.39	100.24	191.85
	λ_2	GF	327.34	297.61	341.79
0.7	λ_0	GF	42.980	6.864	65.209
	λ_1	GF	432.03	175.39	248.33
	λ_2	GF	1014.9	265.76	631.14
0.8	λ_0	GF	92.816	9.455	143.13
		Ref.[15]	92.816	9.454	-
	λ_1	GF	202.62	336.95	211.30
	λ_2	GF	244.31	587.30	296.38
0.9	λ_0	GF	181.95	17.510	286.85
	λ_1	GF	361.31	443.94	363.73
	λ_2	GF	768.66	1391.4	1200.4

Table 3. Axisymmetric dimensionless frequencies $\lambda = \omega R^2 \sqrt{\rho h_R / D_R}$ for annular plate with the same boundary conditions on both the edges ($\eta = 30, \nu = 0.33$).

ξ_l	Dimensionless frequency, λ		Boundary conditions at the both edges			
			Clamped	Simply supported	Free	Sliding
0	λ_0	GF	22.736	14.859	9.076	14.682
	λ_1	GF	61.951	49.513	38.514	49.218
	λ_2	GF	121.17	103.80	87.820	103.50
0.1	λ_0	GF	27.280	14.438	8.818	15.531
	λ_1	GF	75.366	51.654	38.169	53.737
	λ_2	GF	148.21	112.81	88.815	115.52
0.2	λ_0	GF	34.609	16.730	8.441	17.941
		Ref.[15]	34.609	16.733	8.441	-
	λ_1	GF	95.740	63.275	41.570	64.888
	λ_2	GF	188.15	140.48	103.14	142.24
0.3	λ_0	GF	45.346	21.035	8.316	22.144
	λ_1	GF	125.36	81.662	50.222	82.887
	λ_2	GF	246.15	182.44	130.30	183.68
0.4	λ_0	GF	61.872	28.090	8.551	29.064
		Ref.[15]	61.872	28.183	8.551	-
	λ_1	GF	170.90	110.45	65.567	111.46
	λ_2	GF	335.37	247.63	174.58	248.58
0.5	λ_0	GF	89.250	40.011	9.228	40.872
	λ_1	GF	246.35	158.60	92.208	159.38
	λ_2	GF	450.24	354.56	249.27	359.09
0.6	λ_0	GF	139.61	62.126	10.546	62.886
		Ref.[15]	139.61	62.122	10.548	-
	λ_1	GF	325.93	247.28	142.08	248.26
	λ_2	GF	866.48	456.30	331.73	323.67
0.7	λ_0	GF	402.92	110.04	13.018	110.71
	λ_1	GF	855.34	250.46	1104.7	304.01
	λ_2	GF	8088.1	614.32	1837.2	1096.8
0.8	λ_0	GF	559.17	247.17	18.262	277.12
		Ref.[15]	559.16	247.07	18.262	-
	λ_1	GF	1129.1	1026.5	209.37	735.44
	λ_2	GF	7018.8	2079.1	543.15	2511.4
0.9	λ_0	GF	347.08	172.18	34.428	171.64
	λ_1	GF	1996.4	328.80	162.00	232.28
	λ_2	GF	-	391.45	351.50	769.86

6. Conclusions

In this paper, Green's function has been employed to solve natural vibration of annular thin plates with different combinations of boundary conditions on both the edges. Green's function for annular (circular) plates is obtained in closed form. The limited independent solutions of Euler equation were expanded in the Neumann power series rapidly convergent to exact values. Exact solutions were obtained for a low value of degree of approximation ($\eta = 30$). The characteristic equations were obtained for all possible values of core radius. It was possible to obtain the exact eigenvalues using properties of the Volterra integral equations of second kind and calculation software without using the Bessel functions and bisection method (or Newton-Raphson method) presented in other works (Wang and Wang, 2005; Wang, 2014). The natural frequencies for singularities when the core radius approaches zero are calculated. The results of the investigation for annular plates are in good agreement with results obtained by other methods presented in open literature. The results can be used to validate the accuracy of other numerical methods as benchmark values. The calculations were made with the help of Mathematica v10, which is a symbolic calculation software.

Nomenclature

- D - flexural rigidity
- E - Young modulus
- $K(\xi, \alpha)$ - Green's function
- $L(w)$ - differential operator
- $W(\alpha)$ - Wronskian
- $w(r)$ - radial mode function
- $w_i(\xi)$ - fundamental solution
- $\Delta(\lambda)$ - characteristic equation
- λ - dimensionless frequency
- ν - Poisson ratio
- $\xi = r/R$ - dimensionless radial coordinate
- $\xi_j = R_j/R$ - dimensionless radial coordinate of the hole
- ρ - mass density

References

- Gabrielson T.B. (1999): *Frequency constants for transverse vibration of annular discs*. – Journal of the Acoustical Society of America, vol.105, pp.3311-3317.
- Kim C.S. and Dickinson S.M. (1989): *On the lateral vibration of thin annular and circular composite plates subject to certain complicating effects*. – Journal of Sound and Vibration, vol.130, pp.363-377.
- Kukla S. (2009): *Green's functions and their properties*. – Czestochowa University of Technology, Poland.
- Kukla S. and Szewczyk M. (2007): *Frequency analysis of annular plates with elastic concentric supports by using a Green's function method*. – Journal of Sound and Vibration, vol.300, pp.387-393.
- Leissa A.W. (1969): *Vibration of Plates*. – Washington.
- Liu Ch., Chen T. and Hwang Ch. (2000): *Effect of satisfying stress boundary conditions in the axisymmetric vibration analysis of circular and annular plates*. – International Journal of Solids and Structures, vol.38, pp.7559-7569.
- Ramaiah G.K. (1980): *Flexural vibrations of annular plates under uniform in-plane compressive forces*. – Journal of Sound and Vibration, vol.70, 117-131.

- Taher H.R., Omid M., Zadpoor A.A. and Nikooyan A.A. (2006): *Free vibration of circular and annular plates with variable thickness and different combinations of boundary conditions*. – Journal of Sound and Vibration, vol.296, pp.1084-1092.
- Tricomi F.G. (1957): *Integral Equations*. – New York.
- Wang C.Y. (2014): *The vibration modes of concentrically supported free circular plates*. – Journal of Sound and Vibration, vol.333, pp.835-847.
- Wang C.Y. and Wang C.M. (2005): *Examination of the fundamental frequencies of annular plates with small core*. – Journal of Sound and Vibration, vol.280, pp.3-5, pp.1116-1124.
- Wang X., Striz A.G. and Bert C.W. (1993): *Free vibration analysis of annular plates by the DQ method*. – Journal of Sound and Vibration, vol.164, pp.173-175.
- Vera S.A., Sanchez M.D., Laura P.A.A. and Vega D.A. (1998): *Transverse vibrations of circular, annular plates with several combinations of boundary conditions*. – Journal of Sound and Vibration, vol.213, pp.757-762.
- Vogel S.M. and Skinner D.W. (1965): *Natural frequencies of transversally vibrating uniform annular plates*. – Journal of Applied Mechanics, vol.32, pp.926-931.
- Zhou Z.H., Wong K.W., Xu X.S. and Leung A.Y.T. (2011): *Natural vibration of circular and annular plates by Hamiltonian Approach*. – Journal of Sound and Vibration, vol.330, No.5, pp.1005-1017.

Received: February 4, 2015

Revised: August 31, 2015